

High-Load Ball Screws

German-Engineered Precision Components Providing
Maximum Load Capacity and Longer Life in a Compact Envelope





Thomson High-Load Ball Screws — Making the Difference for Motion Control Solutions with Higher Load Capacity

Thomson high-load ball screws move more than twice the load of a standard ball screw, while providing significantly longer and more reliable life with high stiffness and minimum maintenance.

Any new application requires careful analysis of product performance, life and cost. Especially those that take on larger loads. Given that Thomson highload ball screw technology exceeds more than twice the load capacity of a standard ball screw, it is wise to consider these screws for your next high-load application.

Reliable Performance

Thomson has manufactured ball screws and nuts for more than 50 years in Europe. Our background in flight-critical aerospace and defense applications uniquely positions us to provide the highest levels of quality across all of our ball screw products.

Features & Highlights

- Increased capacity for high-load applications at high speeds and long lifetimes.
- More economic solution vs. roller screws.
- Lead accuracy of up to 12 μm/300 mm.
- Compact, simple design allows for downsizing, less weight.
- Optimized ball nut design for maximizing load capacity.
- Available with up to 15 m screw length and with single or double nuts.
- Multiple preloading options available.
- Smooth, quiet motion.

Standard and Custom Offerings

Thomson provides a standard range of high-load ball screws from 40 - 160 mm diameter with a maximum of 1,440 kN dynamic load capacity.

The materials used to manufacture ball screws are critical to their performance. Thomson has decades of experience working with a wide range of standard and non-standard materials. Our experts can recommend the materials or coatings best suited for your application.

Customized ball screw assemblies according to specific application demands are also available upon request.


Consistent Quality and Delivery

A combination of advanced engineering and proprietary manufacturing processes consistently exceed performance, precision and life versus comparable ball screws.



Made for the Most Demanding Industrial Applications

Regardless of the technical challenge, Thomson can help you find the solution to best match the optimal requirements for load, speed, stiffness, accuracy and life.

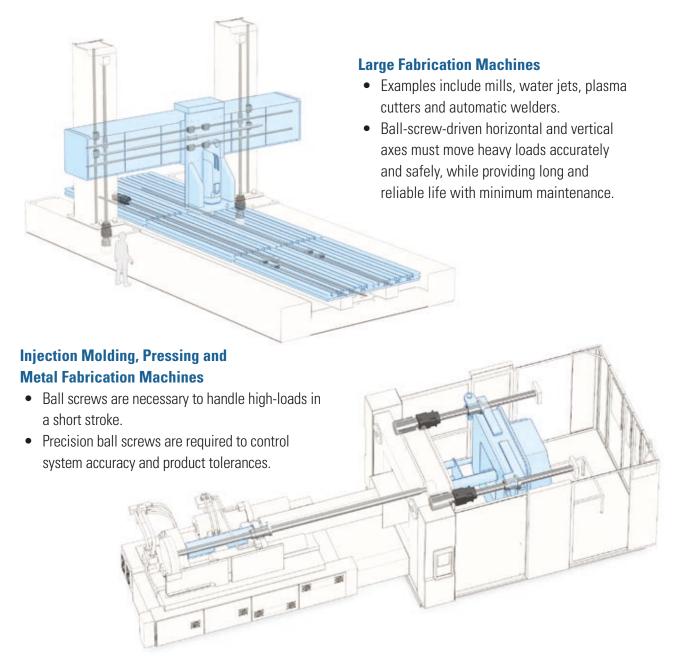

More Applications

- Metal pressing and forming (e.g. rivet presses, servo presses, tube bending, metal sheet bending, test rigs, straightening machines)
- Machine tools

- Lifting devices
- Large valves
- High-load actuators, electromechanical conversion

How Do Thomson High-load Ball Screws Compare to Other Screw Technologies?

Screw Technology Comparison			
	Standard Ball Screw	High-load Ball Screw	Roller Screw
Size Compactness	**	$\star\star\star\star$	$\star\star\star$
Price	***	***	\bigstar

Higher Load Capacity, Longer Lifetime

The life of the assembly is a direct function of the load capacity. Thomson has developed a high-load ball screw by implementing a unique design that provides longer lifetimes when compared to traditional ball screws. Using a high-load ball screw in a low-load application extends the life of the product four to eight times.

A longer lifetime makes Thomson high-load ball screws an attractive option for engineers looking to replace a roller screw or hydraulic system in their applications.


Cost Savings, Smaller Footprint

High-load ball screws offer a space-saving design at an economical price.

A standard configuration ball screw is capable of providing a high-load solution but would require a larger screw diameter, which adds to cost and footprint needed.

A roller screw is also capable of moving highloads, but has a nut that is close to 50% larger at 150% the price of a comparable high-load hall screw Roller screws also require extensive upfront precision machining and a more complex assembly, which contributes to an overall higher cost and larger footprint for final installation.

Thomson high-load ball screws improve performance in a smaller package, extend product life and save money. Their unique design increases the ball screw load capacity, resulting in an ideal fit for any application with a need for high thrust.




Thomson high-load ball nuts offer a faultless, gentle recirculation of the balls and precise positioning.

www.thomsonlinear.com

Standard Options

Standard sizes up to 160 mm in diameter with a maximum dynamic load of up to 1,440 kN are available. Thomson also customizes to your specific application needs. Contact our Customer Service at sales.europe@thomsonlinear.com with your request.

Standard Range of High-load Ball Screw Sizes $\begin{array}{c} \textbf{C}_{\text{am}} \\ [\textbf{kN}] \end{array}$ D_{A} Diameter Lead D, [kN] (P_b) [mm] (d_0) [mm] [mm] [mm] [each] [mm] 7.938 75 165.0 220 434 M8x1 25 16 10 11 110 85 603.4 9.525 90 5.8 152.0 259.4 108 11 125 M8x1 25 7 20 95 10 108 9.525 90 5.8 177.5 258 600.9 11 125 M8x1 25 7 20 95 10 125 110 12.700 105 8 249.0 478.6 1108.7 13.5 145 M8x1 25 9 10 25 120 145 10 12.700 5.8 185.5 419.8 1002.2 13.5 165 M8x1 30 9 25 130 14.288 135 M8x1 30 9 140 10 280.5 690.2 1860.8 155 13.5 175 30 14.288 135 273.0 554.8 1445 155 13.5 175 M8x1 30 9 30 140 10 8 40 14.288 160 252.0 709.3 2276.5 186 17.5 212 M8x1 10 30 165 10 19.050 160 310.0 968.4 1843.8 189 17.5 212 M8x1 40 10 165 10 14.288 200 11 338.0 1040.1 3997.8 233 22 265 M8x1 40 10 40 205 10 19.050 200 349.0 1238 2753.2 233 22 M8x1 40 40 205 10 265 10 19.050 200 7 330.5 996.3 2139.6 233 22 265 M8x1 40 10 40 205 10 14.288 260 12 357.0 1279.9 5870.3 300 22 M8x1 40 265 10 340 10 45 19.050 260 9 354.0 1440.8 3772.8 300 22 340 M8x1 40 10 45 265 10 19.050 260 370.5 1301.2 3351.9 300 22 340 M8x1 40 10 45 265 10

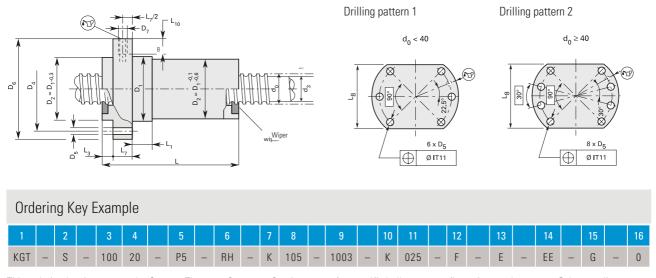

This ordering key is an example. Contact Thomson Customer Service teams for specific ball screw configurations: sales.europe@thomsonlinear.com.

www.thomsonlinear.com 5

EUROPE

United Kingdom

Thomson Office 9, The Barns Caddsdown Business Park Bideford, Devon, EX39 3BT Phone: +44 1271 334 500

E-mail: sales.uk@thomsonlinear.com

Germany

Thomson

Nürtinger Straße 70 72649 Wolfschlugen Phone: +49 7022 504 403 Fax: +49 7022 504 405

E-mail: sales.germany@thomsonlinear.com

France

Thomson

Phone: +33 243 50 03 30 Fax: +33 243 50 03 39

E-mail: sales.france@thomsonlinear.com

Italy

Thomson

Via per Cinisello 95/97 20834 Nova Milanese (MB) Phone: +39 0362 366406 Fax: +39 0362 276790

E-mail: sales.italy@thomsonlinear.com

Spain

Thomson

E-mail: sales.esm@thomsonlinear.com

Sweden

Thomson Estridsväg 10 29109 Kristianstad Phone: +46 44 24 67 00 Fax: +46 44 24 40 85

E-mail: sales.scandinavia@thomsonlinear.com

SOUTH AMERICA

Brasil

Thomson

Av. João Paulo Ablas, 2970

Jardim da Glória - Cotia SP - CEP: 06711-250

Phone: +55 11 4615 6300

E-mail: sales.brasil@thomsonlinear.com

USA, CANADA and MEXICO

Thomson

203A West Rock Road Radford, VA 24141, USA Phone: +1 540 633 3549 Fax: 1 540 633 0294

E-mail: thomson@thomsonlinear.com Literature: literature.thomsonlinear.com

ASIA

Asia Pacific

Thomson

E-mail: sales.apac@thomsonlinear.com

China

Thomson

Rm 805, Scitech Tower 22 Jianguomen Wai Street Beijing 100004

Phone: +86 400 606 1805 Fax: +86 10 6515 0263

E-mail: sales.china@thomsonlinear.com

India

Thomson

c/o Portescap India Pvt Ltd 1 E, first floor, Arena House Road no 12, Marol Industrial Area, Andheri (E), Mumbai 400093 India E-mail: sales.india@thomsonlinear.com

Japan

Thomson

Minami-Kaneden 2-12-23, Suita Osaka 564-0044 Japan Phone: +81 6 6386 8001 Fax: +81 6 6386 5022 E-mail: csjapan@scgap.com

South Korea

Thomson

3033 ASEM Tower (Samsung-dong)

517 Yeongdong-daero

Gangnam-gu, Seoul, South Korea (06164)

Phone: + 82 2 6001 3223 & 3244

E-mail: sales.korea@thomsonlinear.com

