

DENSO Robotics®

# General Product Catalog

***DENSO***



# HISTORY

## Create a people-oriented bright society with our refined robot technology.

DENSO is pursuing productivity by creating environments where people can work in a manner befitting human beings. Our concept of production with a focus on human beings is the starting point for our development of robots. We apply our experience of using production technologies at our production sites to product development, which drives our continuing efforts to create high-performance robots that are easy to use. We are approaching the 56th anniversary; we have sold approximately 120,000 robots since we began development.



Aluminum die-casting  
operation robot

### 1967 To enable people to work in environments befitting human beings

In 1967, DENSO began development of DENSO Robotics products with the aim of freeing employees from the burden of dangerous work and working in adverse environments. Appearing in 1969, the first practical unit was a robot designed for aluminum die-casting work. This freed workers from exposure to the heat produced by die-casting processes and led to improved quality through repeated robot movements and enhanced productivity through unmanned operation.

### 1985 Continuing refinement at in-house factories

In pursuit of improved productivity, DENSO Robotics' practical implementation of horizontally and vertically-articulated robots for in-house auto-parts assembly processes has progressed since around 1985. We have reflected the experience gained through the introduction of robots on production lines with stringent quality, delivery and cost requirements to realize dramatic evolution in robot performance. At the present time, DENSO has introduced more than 20,000 robots in its in-house factories.



Mid-sized 4-axis robot

### 1991 Introduction of robot technology to the world

Based on the ambition of "making major contributions to the world with robot technologies refined in-house," DENSO launched fully-fledged outside sales in 1991. We have taken on board customer needs obtained directly from production sites to improve performance and add new functions. As a result, DENSO Robotics products are now widely used not only in the auto-industry, but also electrical and electronic industries, food processing and pharmaceuticals



Mid-sized 4-axis robot  
HM (1st generation)



## 1998 Greater ease of handling

1998 saw the adoption of the world's first use of a graphical user interface (GUI) in teaching pendant control panels in the robot industry \*.

The resulting intuitive easy-to-understand UI has improved user operability and reduced the time consumed by robot introduction, adjustment and maintenance. The GUI has further evolved into the current RC8A controller.

\*According to our research



Teaching pendant with GUI



Pharmaceutical/  
medical robot  
VS050S2

## 2014 Provision of safety and quality in the fields of food processing and medical treatment

The year 2014 saw the development of VS050S2, a robot compatible with sterile environments. It is now possible to automate drug dispensing and discovery processes and prevent exposure of workers to hazardous substances and other dangers. The Fraunhofer-Gesellschaft research institute has verified the high level of hygiene of VS050S2. (Report No. DE1409-725)

## 2016 Achievement of the ultimate basic performance

Robot performance may not be estimated with catalog values. Fully committed to on-site "usability," in 2016, DENSO Robotics developed the HSR series, a lineup of new high-speed SCARA robots in pursuit of the basic performance elements of "quick acceleration," "runs continuously," and "stops precisely." DENSO Robotics will continue to meet the challenge of going beyond the limits of performance.



4-axis robot  
HSR Series



COLLABORATIVE  
ROBOTS  
COBOTTA

## 2018 A robot that collaborates with people.

COBOTTA, our first industrial compact collaborative robot, was released in 2018. Do you need that extra hand? Do you want to leave simple tasks to robots, and make more time for creative work? COBOTTA will open infinite possibilities to address your needs, and realize creative, new ideas.

## 2020 Now with high-payload robots

We've added the VMB and VLA series of high-payload and long-reach models to a line that previously consisted primarily of conventional compact robots. Together with the existing product lineup, DENSO Robotics can accommodate full automation of manufacturing processes.



5- and 6-axis robot  
VMB VLA



Collaborative robot  
COBOTTA PRO

## 2023 High-speed collaborative robot

COBOTTA PRO is designed not only to collaborate with an operator but also to consistently improve productivity. It delivers both productivity and safety for not only simple tasks but also multi-process tasks such as assembly and inspections.

# We strive to supply easy-to-use robots to everyone who's involved with robots.

Recent years have brought more opportunities for customers in a diverse array of industries to use robots. Our goal is to supply easy-to-use robots to everyone who's involved with robots.

What does it mean for a robot to be easy to use?

Some customers wish to implement highly difficult equipment designs that integrate a development environment that incorporates multiple pieces and types of equipment, while others prefer the ease of intuitive programming and operation.

We believe that different people involved with robots define ease of use in different ways.

DENSO Robotics products continue to evolve day in and day out so that we can better meet the needs of a larger range of customers.

Our new RC9 robot controller makes possible integrated control of equipment by providing openness for integration of the user, system integrator, and manufacturer technologies along with expandability for simple integration of entire systems.

In addition, we're developing artificial intelligence technologies that deliver simplicity while enhancing our software, robot functionality, and support structures.

Going forward, DENSO Robotics will supply ease of use to everyone who's involved with robots through an extensive range of products and support across the board, including in design, setup, operation, and maintenance.





## CONTENTS

<b>06 DENSO ROBOTICS</b>	<b>COLLABORATIVE ROBOTS</b>	<b>06</b> COBOTTA® PRO	<b>COLLABORATIVE ROBOTS</b>
		<b>10</b> COBOTTA®	
<b>5- AND 6-AXIS ROBOTS</b>	<b>5- AND 6-AXIS ROBOTS</b>	<b>15</b> 5- and 6-axis Robot List	<b>5- AND 6-AXIS ROBOTS</b>
		<b>16</b> VLA / VMB Series	
		<b>20</b> VS050 / 060 / 068 / 087	
		<b>22</b> VM Series	
		<b>23</b> VS-6556 / 6577	
		<b>24</b> VP Series	
		<b>25</b> VS050S2	
		<b>26</b> 5- and 6-axis robots: List of pharmaceutical/medical robot operating ranges	
		<b>29</b> 4-axis Robot List	<b>4-AXIS ROBOTS</b>
		<b>30</b> HSR® Series	
<b>4-AXIS ROBOTS</b>	<b>4-AXIS ROBOTS</b>	<b>32</b> HM Series	
		<b>33</b> HS-A1 Series	
		<b>34</b> LPH Series	
		<b>35</b> 4-axis Robot Operating Range	
		<b>36</b> XR Series	<b>GANTRY ROBOTS</b>
		<b>37</b> SC Series	
<b>INTER-PROCESS TRANSFER ROBOTS</b>	<b>INTER-PROCESS TRANSFER ROBOTS</b>	<b>39</b> Robot Controller List	<b>ROBOT CONTROLLERS</b>
		<b>40</b> RC9 / CRC9	
<b>38 ROBOT CONTROLLERS</b>	<b>38 ROBOT CONTROLLERS</b>	<b>49</b> RC8A	
		<b>52</b> MC8A	
<b>54 SOFTWARE / PERIPHERALS</b>	<b>54 SOFTWARE / PERIPHERALS</b>	<b>54</b> Smart TP / Teaching Pendant / Mini Pendant	<b>SOFTWARE / PERIPHERALS</b>
		<b>55</b> Robot Protective Jacket for Food Processing	
		<b>56</b> DRH Series Electric Hand	
		<b>57</b> RC8 Controller Protective Box Light	
		<b>58</b> Automatic Hand Changer / AUTO-ID Products	
		<b>59</b> Software Lineup	
		<b>60</b> WINCAPS® III	
		<b>62</b> WINCAPS® Plus	
		<b>64</b> RC Vision	
		<b>66</b> ORI2 SDK	
<b>72 MAIN FUNCTIONS</b>	<b>72 MAIN FUNCTIONS</b>	<b>67</b> Robot Tools	<b>MAIN FUNCTIONS</b>
		<b>68</b> EMU	
		<b>69</b> VRC/VRC9 / Mobile Tools	
		<b>70</b> IoT Products	
		<b>72</b> Robust Compliance Control Function with Force Sensor	
		<b>73</b> Compliance Control Function with Force Sensor / High-precision Calibration (Hi-Cal)	
		<b>74</b> Mirror Control Function / Dual Arm Control	
		<b>75</b> Cooperative Control / Exclusive Control / Virtual Fence	
		<b>76</b> Conveyor Tracking / Circular Tracking / Extended-joint Tracking	
		<b>77</b> Extended-joint Support Control / EtherCAT Slave Motion / External Axis Control	
<b>81 SUPPORT</b>	<b>81 SUPPORT</b>	<b>78</b> External TCP / Command Slave / Supports CONTEC Expansion Boards	<b>SUPPORT</b>
		<b>79</b> Compliance Control Function / b-CAP (communications protocol) / Optimal Speed Setting / Control Panel Function	
		<b>80</b> Provider	
		<b>81</b> Global Network	

## 5- AND 6-AXIS ROBOTS

### VP Series RC8A

VP-5243 / 6242



### VS Series RC8A

VS050 / 060



VS068 / 087



VS-6556 / 6577



Maximum arm reach	430 / 432 mm	505 / 605 mm	710 / 905 mm	653 / 854 mm
Maximum payload	3 <sup>*1</sup> / 2.5 <sup>*2</sup> kg	4 kg	7 kg	7 kg <sup>*5</sup>
Position repeatability <sup>*3</sup>	±0.02 mm	±0.02 mm	±0.02 to ±0.03 mm	±0.02 to ±0.03 mm
Options	<ul style="list-style-type: none"> <li>Standard type</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> <li>Protected type (IP67)</li> <li>Dust &amp; splash proof type (wrist: IP65 / unit: IP54)</li> <li>Cleanroom type (ISO Class 3/5)</li> <li>UL specifications</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> <li>Protected type (IP67)</li> <li>Dust &amp; splash proof type (wrist: IP65 / unit: IP54)</li> <li>Cleanroom type (ISO Class 3/5)</li> <li>UL specifications</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> <li>Dust &amp; splash proof type (wrist: IP65 / unit: IP54)</li> <li>Cleanroom type (Class 10/100)</li> </ul>

## 4-AXIS ROBOTS

### HSR® Series RC8A

HSR®048 / 055 / 065



### HS-A1 Series RC8A

HS035A1 / 045A1 / 055A1



### HM Series RC8A

HM-40\*\*\* / 4A\*\*\*



### LPH Series RC8A

LPH-040



Arm reach	480 / 550 / 650 mm	350 / 450 / 550 mm	600 / 700 / 850 / 1,000 mm	400 mm
Vertical stroke	100 / 200 / 320 / 510 mm <sup>*7</sup>	100 / 150 / 200 / 320 mm	100 / 150 / 200 / 300 / 400 mm	150 mm
Maximum payload	8 kg	5 kg	10 / 20 kg	3 kg (for 2 kg payload)
Position repeatability <sup>*3</sup>	±0.01 to ±0.012 mm	±0.01 mm	±0.02 to ±0.025 mm	±0.02 mm
Standard cycle time <sup>*4</sup>	0.28 to 0.31 sec (for 2 kg payload)	0.29 sec (for 2 kg payload)	0.29 to 0.31 sec (for 2 kg payload)	0.45 sec
Options	<ul style="list-style-type: none"> <li>Standard type</li> <li>Bellows type</li> <li>Dust &amp; splash proof type (IP65)</li> <li>Cleanroom type (ISO Class 3) <sup>*8</sup></li> <li>UL specifications</li> <li>Ceiling type</li> <li>H1 grease type (IP65)</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> <li>Bellows type</li> <li>Dust &amp; splash proof type (IP65)</li> <li>Cleanroom type (ISO Class 3) <sup>*8</sup></li> <li>UL specifications <sup>*8</sup></li> <li>Ceiling type</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> <li>Dust &amp; splash proof type (IP65)</li> <li>Cleanroom type (ISO Class 5)</li> <li>UL specifications <sup>*9</sup></li> <li>Ceiling type</li> </ul>	<ul style="list-style-type: none"> <li>Standard type</li> </ul>

<sup>\*1</sup>: If wrist downward movement exceeds ±45°, the maximum payload is 2.5 kg. <sup>\*2</sup>: If wrist downward movement exceeds ±45°, the maximum payload is 2 kg.

<sup>\*3</sup>: Position repeatability (center of end-effector mounting face) is the precision at constant ambient temperature. <sup>\*4</sup>: One cycle is the time taken to move an object at a height of 25 mm between two points 300 mm apart.

## PHARMACEUTICAL/MEDICAL ROBOTS

## VM Series RC8A

VM-6083 / 60B1



1,021 / 1,298 mm
13 kg <sup>*6</sup>
±0.05 to ±0.07 mm
<ul style="list-style-type: none"> <li>● Standard type</li> <li>● Dust &amp; splash proof type (wrist: IP65 / unit: IP54)</li> <li>● Cleanroom type (Class 100)</li> </ul>

## VMB Series RC9

VMB-2515 / 2518



1,506 / 1,804 mm
25 kg
±0.05 mm
<ul style="list-style-type: none"> <li>● Standard type</li> <li>● Protected type</li> <li>● Cleanroom type</li> </ul>

## VLA Series RC9

VLA-4025 / 6022



2,503 / 2,257 mm
40 / 60 kg
±0.06 mm
<ul style="list-style-type: none"> <li>● Protected type (wrist: IP67 / unit: IP65)</li> </ul>

## VS Series RC8A

VS050S2



Maximum arm reach	520 mm
Maximum payload	4 kg
Position repeatability <sup>*3</sup>	±0.02 mm
Standard cycle time <sup>*4</sup>	0.35 sec (for 1 kg payload)
Options	<ul style="list-style-type: none"> <li>● H<sub>2</sub>O<sub>2</sub>-resistant</li> <li>● UL specifications</li> </ul>

## COLLABORATIVE ROBOTS

## COBOTTA®

CVR038



Total arm length (No. 1 arm + No. 2 arm)	342.5 (165 + 177.5) mm
Rated payload (Maximum payload)	0.5 kg <sup>*10</sup> *Without electric gripper
Position repeatability <sup>*3</sup>	±0.05 mm
Options	<ul style="list-style-type: none"> <li>● Standard type</li> <li>● OSS version</li> </ul>

## COBOTTA® PRO CRC9

CVRB-0609/1213



Maximum arm reach	1,066 / 1,463 mm
Maximum payload	6 / 12 kg
Position repeatability <sup>*3</sup>	±0.03 to ±0.04 mm
Options	<ul style="list-style-type: none"> <li>● Dust &amp; splash proof type (IP54)</li> <li>● Cleanroom type (ISO Class 5)</li> </ul>

## GANTRY ROBOTS

## XR Series RC8A

XR-43\*\*\*



Arm reach	200 / 250 / 300 mm
X-axis stroke	450 / 760 / 1,060 mm
Maximum payload	5 kg
Position repeatability <sup>*3</sup>	±0.015 mm
Standard cycle time <sup>*4</sup>	0.56 sec (for 3 kg payload)
Options	<ul style="list-style-type: none"> <li>● Standard type</li> </ul>

## INTER-PROCESS TRANSFER ROBOTS

## SC Series RC8A

SCL\*\*\*



1-axis stroke	600 to 12,000 mm
2-axis stroke	100 / 200 / 300 / 400 mm
3-axis stroke	100 / 200 / 300 / 400 mm
4-axis stroke	100 / 200 / 300 / 400 mm
Maximum payload	3 kg/S <sup>*11</sup> , 5 kg/Z
Position repeatability <sup>*3</sup>	±0.02 to ±0.05 mm
Options	<ul style="list-style-type: none"> <li>● Standard type</li> </ul>

<sup>\*5</sup>: If wrist downward movement exceeds ±45°, the maximum payload is 6 kg. <sup>\*6</sup>: If the payload exceeds 11 kg, flange downward movement is limited to ±10°.

<sup>\*7</sup>: Standard type vertical stroke <sup>\*8</sup>: Floor type only <sup>\*9</sup>: Standard type/dust and splash proof type <sup>\*10</sup>: 0.7 kg within ±10° with the wrist angled downward <sup>\*11</sup>: With S stroke of 400, 2 kg/S

# COBOTTA<sup>®</sup> PRO

A high-speed collaborative robot with both high productivity and safety



COBOTTA PRO is certified by third party certification bodies to the standards including EN ISO 10218-1:2011, ISO/TS 15066:2016, and EN ISO 13849-1:2015.


## Top-class speed

### Operating speed table

Touch sensing soft cover	Collaborative operation		Non-Collaborative operation (High-speed)
	Clamping <sup>*1</sup>	Contact <sup>*2</sup>	
Without	200 mm/s	1,800 mm/s	2,500 mm/s
With	500 mm/s	2,000 mm/s	



<sup>\*1</sup> Definition of clamping  
A contact where the body part is clamped and cannot recoil or retract



<sup>\*2</sup> Definition of contact  
A contact where the body part is not clamped and can recoil or retract

<sup>\*</sup>The table shows the figures for COBOTTA PRO 1300.

<sup>\*</sup>In accordance with ISO/TS15066, the table indicates the speed at which the robot can stop without applying more than 280 N of force in the event of clamping or contact.

### Improved productivity through switching between high-speed and collaborative operations


COBOTTA PRO slows down when an operator approaches it and speeds up when the person moves away. By switching the operating speeds according to the situation, a streamlined automated process can be achieved.

<sup>\*</sup>Requires safety sensors that detect an operator (sold separately).

### Improved productivity through high-speed collaborative operation

COBOTTA PRO is engineered to operate at high speeds and perform highly difficult tasks through integrated control, enabling the automation of complex processes such as assembly and inspections.

Increased potential of automation through the combination of high-speed operation and integrated control of the robot cell/system

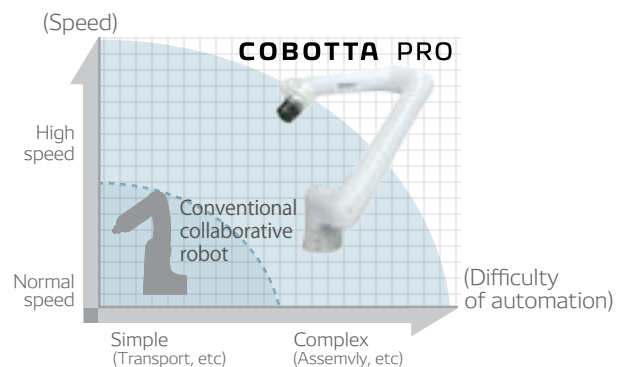

## Technologies enabling high-speed collaborative operation

Proprietary, high-output motor module with a lightweight, high-rigidity embedded torque sensor \* Patent applied for

Our newly developed high-output motor module has a super-lightweight, high-rigidity embedded torque sensor that can measure torque highly accurately even during high-speed operation. It allows COBOTTA PRO to be one of the fastest collaborative robots that can operate fast and accelerate/decelerate quickly.



### Extensive internal wiring





Air piping, Ethernet, and signal wires are installed inside the slim arm, all the way up to the flange on its end. This reduces the risk of wiring breaks.



## Safety that maximizes productivity

### Scene function

The following description uses a bolt-tightening process as an example. When tightening a bolt, a reaction force is generated, and the robot would stop by that force exceeding the set force value of a safety function. Now the collaborative operation can not continue, and this poses issues, including increased cost due to the need to install a safety fence and losses and inconvenience caused by robot stoppages. The scene function eliminates these issues by making it possible to switch parameters in a robot program according to the situation. The space set by the scene function (robot motion space) is guaranteed by a PL d, Category 3 safety performance.

Scene 1 Picking up a bolt	Scene 2 Move the bolt above	Scene 3 Approach the workpiece	Scene 4 Tighten the bolt
			
Monitored speed 125 mm/s Monitored force 50 N	Monitored speed 1,800 mm/s Monitored force 150 N	Monitored speed 125 mm/s Monitored force 50 N	Monitored speed 250 mm/s Monitored force 500 N

The operator's hand could get caught between the end point and equipment, so configure parameters with the limited speeds and forces to maintain safety.

Here is a risk of contacting the side of the robot. However, there are no sharp points, so the allowable speed and force can increase during collaborative operation.

The operator's hand could contact the end point, so change to the reduced speed and force to maintain safety.

Here there is no risk of the operator's hand getting caught, the force parameter is greater than the tightening reaction and can be configured so that this robot can continue the collaborative operation.

\* Monitored force and speed values are merely examples.  
\* Additional safety measures may be required after a risk assessment.

# COBOTTA® PRO

CRC9 ▶ P.46

## CVRB-0609/1213

COBOTTA PRO is designed not only to collaborate with an operator but also to consistently improve productivity. It delivers both productivity and safety for not only simple tasks but also multi-process tasks such as assembly and inspections.



Maximum arm reach	1,066 mm / 1,463 mm
Maximum payload	6 kg / 12 kg
Position repeatability	In each of X, Y and Z directions:±0.03 / ±0.04

### Specifications

Item		Unit	Specifications	
Product name		-	COBOTTA PRO 900	COBOTTA PRO 1300
Number of axes		-	6	
Position detection		-	Absolute encoder	
Drive motor		-	AC servo motors for all axes	
Brake		-	Brakes for all axes	
Maximum motion area (Point P:4th, 5th, 6th axis center)		mm	908	1,304
Overall arm length (1st arm + 2nd arm)		mm	900	1,300
Maximum arm reach		mm	1,066	1,463
Maximum motion angle	1st axis	deg	±270	±270
	2nd axis		±150	±150
	3rd axis		±150	±150
	4th axis		±270	±270
	5th axis		±150	±150
	6th axis		±360	±360
Maximum payload		kg	6	12
Maximum speed in a Collaborative State	Without touch sensing soft cover	mm/s	1,800	
	With touch sensing soft cover <sup>*1</sup>		2,000	
Maximum TCP translational speed in a Non-Collaborative State		mm/s	2,100	2,500
Position repeatability (at the center of a tool mounting face) <sup>*2</sup>		mm	In each of X, Y and Z directions:±0.03	In each of X, Y and Z directions:±0.04
Maximum allowable moment	Around 4th axis	Nm	20	38.5
	Around 5th axis		14.6	28
	Around 6th axis		6.5	12
	Around 4th axis		0.8	1.45
Maximum allowable moment of inertia	Around 4th axis	kgm <sup>2</sup>	0.45	0.9
	Around 5th axis		0.1	0.35
	Around 6th axis			
Connector panel mounting position		-	Back side of the robot base (Bottom side of the robot base is optional)	
Equipment for Tool		-	Signal line:2 pins (for Air Piping type), 8 pins (for Through Wiring type) <sup>*3</sup>	
			Ethernet cable:1 cable (8 pins) <sup>*4</sup>	
			Analog input:2 systems / RS-485:1 system	
			Hand input:5 pins / Hand output:5 pins	
			Lighting:1 system	
			Power source + (switching between OFF, 12 V and 24 V), Power source - (0 V)	
			Φ4 x 2 (for Air Piping type)	
Air piping		-	0 to 0.39	
Air source	Operating pressure	MPa	0.49	
	Maximum allowable pressure			
Degree of protection		-	IP54 (Dust-& splash-proof type)	
Cleanliness classification (ISO 14644-1)		-	Class 5 (Clean type)	
Environment Conditions of Installation Site (During operation)	Without touch sensing soft cover	-	Ambient temperature:0 to 50°C	
	With touch sensing soft cover <sup>*1</sup>		Ambient temperature:5 to 45°C	
			Relative humidity:20 to 90% (No dew condensation allowed.)	
			Vibration:4.9 m/s <sup>2</sup> (0.5 G) or less	
Noise (Equivalent continuous A-weighted sound pressure level)		dB	65 or less	
Pollution degree (IEC 60664-1)		-	3	
Weight	Without touch sensing soft cover	kg	Approx. 29	
	With touch sensing soft cover (Full set) <sup>*1</sup>		Approx. 35	
	With touch sensing soft cover (Half set) <sup>*1</sup>		Approx. 32	
			Approx. 41	
Applicable standards		-	ISO 10218-1:2011, ISO 13849-1:2015, ISO/TS 15066:2016, IEC 60204-1:2016/A1:2021, EN 61000-6-2:2005, EN 61000-6-4:2007/A1:2011, EN 61000-6-7:2015	

\*1: Optional.

\*2: The precision can be achieved when the robot is used at a constant ambient temperature.

\*3: Select either Air Piping type or Through Wiring type

\*4: The Ethernet cable connected to the connector panel is 20 m long or less.

### Legend

Robot name		CVRB - <div></div> <div></div> <div></div> <div></div>				
Maximum payload:		Overall arm length:		Ingress protection:		Internal wiring and piping type: A1:Air piping type A2:Through wiring type
06 : 6kg 12 : 12kg		09 : 900mm 13 : 1,300mm		W4:Dust-& splash-proof type (IP54) C5:Clean room type (ISO Class 5)		
*Product appearance and specifications are subject to change without notice.						

## Options

### Touch sensing soft cover

This cover can detect and stop the robot motion using a two-layer design consisting of soft, cushioning silicon and high-sensitivity built-in sensors. It increases the maximum collaborative speed to improve productivity. Two models of covers are available: the cover for the robot arm and the cover for an end-effector, each of which is available in two types. Choose depending on the intended use.

#### Changes in speed when using the touch sensing soft cover \*With COBOTTA PRO 1300

Touch sensing soft cover	Collaborative operation		Non-Collaborative operation (High-speed)
	Clamping <sup>1</sup>	Contact <sup>2</sup>	
Without	200 mm/s	1,800 mm/s	2,500 mm/s
With	500 mm/s <b>2.5×</b>	2,000 mm/s <b>1.1×</b>	



\*1 "Clamping" refers to a contact where the body part is clamped and cannot recoil or retract.

\*2 "Contact" refers to a contact where the body part is not clamped and can recoil or retract.

\*In accordance with ISO/TS15066, the table indicates the speed at which the robot can stop without applying more than 280 N of force in the event of clamping or contact.

	Full set	Half set	End effector cover
External appearance	 *Light blue shading indicates covered areas.	 *Light blue shading indicates covered areas.	
Weight	For COBOTTA PRO 900: Approx. 6 kg	For COBOTTA PRO 900: Approx. 3 kg	Small: 240 g Large: 450 g
	For COBOTTA PRO 1300: Approx. 9 kg	For COBOTTA PRO 1300: Approx. 4 kg	Attachment for flange: 200 g *Require to prepare parts for mounting the covers on the end effector by the customer.
Dimensions	-	-	Small: 80 × 160 mm Large: 160 × 160 mm
Detection time	5 ms or less		
Detected force	10 N or more		
Operating environment temperature	5 °C to 45 °C		
Operating environment humidity	20 % to 80 % RH (non-condensing)		
Environmental resistance	IP54 *Avoid use in environments where the product would be exposed to oil or chemical substances.		
Safety performance	PL d, Cat. 3		
Certified standard compliance	EN ISO 13849-1:2015, EN ISO 13856-3:2013		

\*Use of the full set requires an external battery unit (purchased separately).

\*The full set and half set covers are shipped mounted on the robot. For mounting after delivery, our service engineers will visit the customer's site and mount them.

Please contact a service facility for more information.

\*For end effector covers, please choose the necessary number of covers based on the hand in use. (Due to serial connections, the last cover must be an End Cover.)

\*Touch sensing soft cover (except for the ones for end-effector) is certified by third party certification bodies if mounted on the robot.

### Fine direct teaching



#### Inching function

Moves the arm at a minimum unit of 0.1 mm. This capability allows you to perform teaching for tasks requiring accuracy, such as mating and inserting parts, with direct teaching alone.



#### Significant reduction in teaching work

Combining out-of-the-box and optional functions lets you quickly automate processes intuitively without sacrificing continuity.



#### Plane alignment function

The plane alignment function allows the robot to automatically move vertically to a specified plane. It simplifies setting up three dimensional diagonal movements, helping reduce man-hours.

### Easy block programming



#### Intuitive programming using blocks

This approach makes intuitive programming possible. The method can also accommodate complex processes thanks to the ability to set exact values on a property screen.



#### Simple drag-and-drop operation

A simple operation that only requires connecting available blocks prevents syntax errors. This approach reduces man-hours that would otherwise be spent on correcting mistakes and fine-tuning code.



#### Obvious original icons

Original icons make it easy to visually identify operations, allowing even beginners to create programs quickly.  
\*Figure illustrates an example screen.

## Anywhere, anytime, hassle-free. A robot that collaborates with everyone.

The human-friendly, compact, and portable design allows you to take COBOTTA anywhere, and automate tasks right away.

### 1 safety design

Safe shape and movement



### 2 portable body

Transportable immediately to sites with staff shortages



### 3 easy to use

Simple teaching with no memorization




### 4 open platform

Infinite possibilities




- Camera Built-in Set
  - AF Camera (N10-W02)
  - End-effector Ethernet Cable
  - Camera Stay

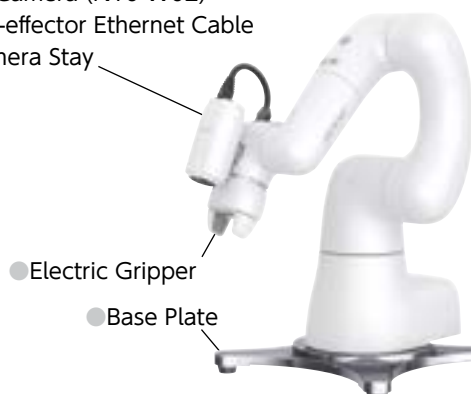

- Electric Vacuum



- Field Network Interface Module

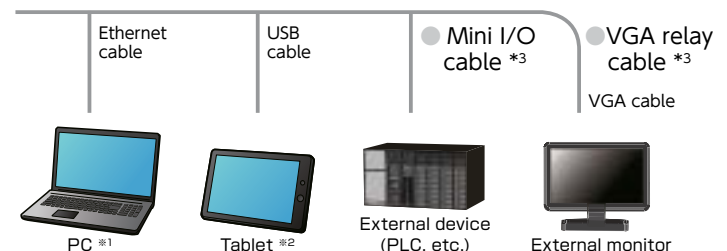

\*1: OS: Windows    \*2: OS: Android, 8" or larger screen recommended.    \*3: Option(s) required.


# Choose according to your application. teaching & operating software

## Easy start method



### Cobotta World

COBOTTA World is an application that runs on an Android tablet. Using this application, you can program the robot to perform a simple task such as picking and placing by simply moving items or operating the COBOTTA robot according to the guidance instruction.



### WINCAPS III & TP App \*1

WINCAPS III is a programming application that runs on a Windows PC. It allows for easy editing and management of data of multiple units of COBOTTA. TP App is used to operate the COBOTTA robot or perform position teaching.


## PC application to control the robot



### For Windows OS

#### Use of ORIN2 SDK

By installing the middleware, ORIN2 SDK, in the PC, COBOTTA can be controlled with a development tool that supports OLE (COM, Active X), such as Visual Basic, C++, or LabVIEW.




### For OS other than Windows OS

#### Use of b-CAP communication \*2


When Linux, iOS, or Android is used, COBOTTA can be controlled by transmitting and receiving b-CAP packets.

## ROS



### Use of an external PC installed with ROS

By installing a ROS package from GitHub to an external PC, COBOTTA can be controlled using b-CAP communication (transmission of b-CAP packets).




### Use of COBOTTA OSS version

The COBOTTA OSS version enables the COBOTTA unit as a PC. Simply install Linux and ROS in the COBOTTA unit for its control.

QR code to download the COBOTTA driver for Linux



## PLC for the control



### Use of Command Slave function

Connect the PLC to COBOTTA using a high-speed field network. COBOTTA can be controlled by the PLC language (ladder program).



### Directly controlling from PLC

Like other DENSO robotics products, COBOTTA can be controlled directly by PLC inputs and outputs.

\*1: TP App comes in two types. Remote TP for Android tablet and Virtual TP for Windows PC.

\*2:b-CAP is a protocol which is created by following the concept of CAP, whose specifications are stipulated by ORIN, to improve communication speed.

[Notes] This product is an industrial robot capable of operating in collaboration with human beings. Before using the product, be sure to conduct risk assessment in accordance with the applicable law, regulations, notices, guidance, JIS B 9700:2013, etc., and reduce risk as much as possible. In addition, the user should check compliance with laws, ordinances and standards pertaining to the operating environment.

## Hand tools

Two types of hand tools are available.\*1

You can also fabricate your own hand tool for use with COBOTTA



### Electric Gripper

This hand tool is ideal for the basic operations of gripping and releasing.



### Electric Vacuum Generator

This tool makes it easy to pick up items via suction without providing an external air compressor.



### Base Plate Set \*3

This baseplate allows COBOTTA to operate in a freestanding orientation so that the robot doesn't need to be mounted.



### Field Network Interface Module

Use EtherCAT, Ethernet/IP, and PROFINET.



## Camera

By attaching a camera designed specifically for use with COBOTTA to the robot's wrist, you can perform work while detecting the position of target objects. Use the factory default calibration to get started quickly without a timely initial setup process.

### Camera Built-in Set \*2

#### AF Camera (N10-W02)

This AF camera sets the optimal exposure automatically and eliminates the need to focus manually.



Third-party products  
Explore how to broaden  
COBOTTA's utility.

\*1: Specify at time of order. \*2: To use the camera, supply PoE to the hub. The set includes an end-effector Ethernet cable and camera stay.

**CVR038**

Anywhere, anytime, hassle-free.

A robot that collaborates with everyone.

The human-friendly, compact, and portable design allows you to take COBOTTA anywhere, and automate tasks right away.



Maximum arm reach	342.5 mm
Rated payload	0.5 kg <sup>*2</sup>
Position repeatability	±0.05 mm

[Notes] This product is an industrial robot capable of operating in collaboration with human beings. Before using the product, be sure to conduct risk assessment in accordance with the applicable law, regulations, notices, guidance, JIS B 9700:2013, etc., and reduce risk as much as possible. In addition, the user should check compliance with laws, ordinances and standards pertaining to the operating environment.

Patent No. 6365113  
Design registration No. 1583755 / No. 1583756 /  
No. 1583757 / No. 1583758

COBOTTA®

**Specifications**

Item	Specifications
Axes	6th axis (arm unit) + 1st axis (electric gripper unit) <sup>*1</sup>
Brake	1, 2, 3, 4 and 5 axes with brakes
Total arm length (No. 1 arm + No. 2 arm)	342.5 (165 + 177.5) mm
Rated payload (Maximum payload)	0.5 kg (0.7 kg within ±10° with the wrist angled downward) <sup>*2</sup>
Maximum allowable moment of inertia	J4: 0.0065 kgm <sup>2</sup> J5: 0.0040 kgm <sup>2</sup> J6: 0.00025 kgm <sup>2</sup>
Position repeatability	±0.05 mm <sup>*3</sup>
Standard cycle time	4.32 sec in the factory configuration, 1.6 sec. when set to maximum speed (Reciprocating movement time for 200 mm in the horizontal direction and 25 mm in the vertical direction)
Protection grade	COBOTTA main unit: IP30, AC adapter, AC cable: IP20
Software	Standard version: COBOTTA-dedicated software, OSS version: None (*Linux, etc. may be installed by the customer.)
Power supply specification (AC adapter)	Input: Single phase 100 - 240 V AC ±10% / 47 - 63 Hz
External signal	System input: 12 pins / System output: 11 pins User input: 8 pins / User output: 9 pins External emergency stop connection x 1 ch
External communication	Ethernet x 1 line, USB x 2 lines, VGA output x 1 ch
Environmental conditions (during operation)	Temperature: 0 - 40°C / Humidity: 20 - 80 %RH (no condensation allowed)
Unit weight	Approx. 4 kg
Safety specifications	Standard version: ISO 10218-1:2011 ISO / TS 15066:2016 ISO 13849-1:2015 PL d Cat.3 OSS version: ISO 13849-1:2015 PL d Cat.3

\*1. Options \*2. Without electric gripper \*3. At fixed ambient temperature

**System configuration**

- AC adapter
- AC cable <sup>\*1</sup>
- Dummy connector (I/O) <sup>\*2</sup>
- Emergency stop box
- Manual disc
- Software DVD for COBOTTA <sup>\*3,4</sup>

\*1: Select based on type of power outlet in country where robot will be used.

\*2: When not using the optional mini I/O cable.

\*3: Install on tablet or PC.

\*4: Android app can also be downloaded from Google Play.

**Overhaul**

Inspection is required every 5 years to maintain the safety and performance necessary for a collaborative robot. Parts may need to be replaced, depending on the inspection results.

**Legend**

<b>CVR 038 A1 - NV6 - NNC - NNN</b> <input type="checkbox"/> <input type="checkbox"/> - NNN <input type="checkbox"/>				
<b>Model:</b> CVR: Collaborative vertically-articulated robot	<b>Axis specifications:</b> V6: 6th axis	<b>Compliant standard:</b> C: Safety function	<b>I/O:</b> P: Positive common (PNP) M: Negative common (NPN)	<b>Electric gripper:</b> A: With N: Without
			<b>OS:</b> A: Standard OS version N: OSS version	

## Case studies

## Understanding issues and ideas.

**Industry** | Placing and arranging parts in rows

(Courtesy of Toyota Motor Corporation)

COBOTTA recognizes the front and back side of parts fed from a parts feeder and positions them in the correct orientation. COBOTTA releases the worker from a process with a workload not enough for one worker.

**Industry** | Sorting parts, operating tablet, and inspecting substrate

(Courtesy of Canon Inc.)

COBOTTA utilizes a camera and image processing software to automate simple and repetitive work that requires visual confirmation. COBOTTA can perform a multi-movement processing job in a limited space.

**Industry** | Packing teabags in a box using AI vision

(Courtesy of Innotech Corporation and OSARO Inc.)

COBOTTA can automate a process of picking transparent, lustrous or irregularly shaped items and image recognition by utilizing AI vision. COBOTTA can perform packing work in a limited space.

**Laboratory** | Chemical analysis

COBOTTA can automate a variety of work involved in chemical analysis, such as solution filtration, constant volume measurement, agitation and beaker washing. COBOTTA releases researchers from simple work in a laboratory.

**Academic** | Serving as a programming learning tool

COBOTTA OSS version enables development activities in an ROS or LabVIEW environment, thus allowing for its use in education and training.

**Office** | RPA&COBOTTA® office automation support

(Developed jointly with Mitsubishi HC Capital Inc. and Hitachi Systems, Ltd.) RPA&COBOTTA® automates a series of tasks, such as placement of seal stamps and conversion of paper documents to digital data. It can combine with RPA tools to improve office efficiency and reduce workloads.

# 5- AND 6-AXIS ROBOTS

## 5- AND 6-AXIS ROBOTS

The VP, VS, and VM series of slim-body robots broaden freedom of design. The VMB and VLA series provide high payloads and long arm reach. Thanks to their extensive range of products, these lines make it possible to automate entire manufacturing processes.



## Main features

Model	VP		VS								VM		VMB		VLA		
	5243	6242	050	060	068	087	6556 <sup>*7</sup>		6577 <sup>*7</sup>		050S2 (Pharmaceutical /medical)	6083 <sup>*8</sup>	60B1 <sup>*8</sup>	2515	2518	4025	6022
							Standard	With brake	Standard	With brake							
Maximum arm reach	430 mm	432 mm	505 mm	605 mm	710 mm	905 mm	653 mm		854 mm		520 mm	1,021 mm	1,298 mm	1,506 mm	1,804 mm	2,503 mm	2,257 mm
Maximum payload	3 kg <sup>*3</sup>	2.5 kg <sup>*4</sup>	4 kg		7 kg		7 kg <sup>*5</sup>				4 kg	13 kg <sup>*6</sup>		25 kg		40 kg	60 kg
Standard cycle time <sup>*1</sup>	0.99 sec (for 1 kg payload)		0.35 sec (for 1 kg payload)		0.31 sec (for 1 kg payload)	0.34 sec (for 1 kg payload)	0.49 sec (for 1 kg payload)		0.59 sec (for 1 kg payload)		0.35 sec (for 1 kg payload)	0.89 sec (for 5 kg payload)	0.95 sec (for 5 kg payload)	—	—	—	—
Position repeatability <sup>*2</sup>	±0.02 mm		±0.02 mm		±0.02 mm	±0.03 mm	±0.02 mm		±0.03 mm		±0.02 mm	±0.05 mm	±0.07 mm	±0.05 mm		±0.06 mm	
Standard type	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	✓	✓	—	—
Protected type (IP67)	—	—	✓	✓	✓	✓	—	—	—	—	—	—	—	✓	✓	✓ wrist: IP67 / unit: IP65	✓ wrist: IP67 / unit: IP65
Dust & splash proof type (wrist: IP65 / unit: IP54)	—	—	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	—	—	—	—
Cleanroom type	—	—	✓ ISO Class 3/5	✓ ISO Class 3/5	✓ ISO Class 3/5	✓ ISO Class 3/5	✓ Class 10/100	✓ Class 10/100	✓ Class 10/100	✓ Class 10/100	—	✓ Class 100	✓ Class 100	✓	✓	—	—
UL specifications	—	—	✓	✓	✓	✓	—	—	—	—	✓	—	—	—	—	—	—
H <sub>2</sub> O <sub>2</sub> -resistant	—	—	—	—	—	—	—	—	—	—	✓	—	—	—	—	—	—

\*1: One cycle is the time taken to move an object at a height of 25 mm between two points 300 mm apart.

\*2: Position repeatability (center of end-effector mounting surface) is the precision at constant ambient temperature.

\*3: If wrist downward movement exceeds ±45°, the maximum payload is 2.5 kg. \*4: If wrist downward movement exceeds ±45°, the maximum payload is 2 kg.

\*5: If wrist downward movement exceeds ±45°, the maximum payload is 6 kg. \*6: If the payload exceeds 11 kg, flange downward movement is limited to ±10°

\*7: Standard: J2 - J4 with brakes / With brakes: J2 - J6 with brakes \*8: J2 - J6 with brakes

## Robot list

### Standard type



This type is used in standard environments.

### Protected type (IP67)



Usable in places requiring environmental resistance and suitable for work in the environments where equipment might be exposed to water (equivalent to IP67).

### Dust & splash proof type (wrist: IP65 / unit: IP54)



Suitable for the work environments where equipment may be exposed to dust or water droplets, and the wrist has the dust & splash proof performance of IP65, while the body, IP54.  
Also usable in the vicinity of the processing machine, where equipment might be exposed to oil or mist.

### Cleanroom type



Specification best suitable for automated and energy-saving production system in clean room, and ideal for electronic parts, food, and medical device-related work in clean room to realize the dust proof by highly-sealed structure as well as high cleanliness and high performance.

### UL specifications



UL/cUL certified products.



### H<sub>2</sub>O<sub>2</sub>-resistant



Robot with sterility control for use in sterile environments and clean environments that employ H<sub>2</sub>O<sub>2</sub> gas 35% density (dry/wet) and UV exposure.

# VLA/VMB Series

These high-payload, long-arm-reach models are ideally suited to transport and palletizing work.



## VLA-4025 / 6022

### Features

#### Resist with adverse environments

These robots have an IP67\* protection rating, helping to facilitate automation in harsh environments where oil and mist can splash.

\*Wrist: IP67-compliant, main unit: IP65-compliant




#### Ideal for transporting and palletizing heavy loads

The robots in the VLA series have the largest payload and arm length of any DENSO robot, making them ideal for automating heavy load transfer and palletizing operations. When combined with "Palletizing Builder," which is an option with WINCAPS Plus Offline Programming software suite, the palletizing process can be automated without coding.



#### Built-in field network

The field network is wired inside the robot, reducing the complexity of the external wiring. Compatible communication standards: PROFINET, PROFIBUS, DeviceNet

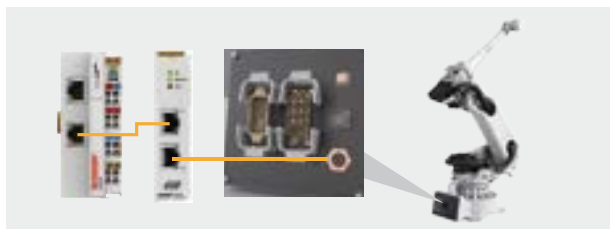

### Options

#### Multibus cable

Field networks such as DeviceNet are wired inside the robot, reducing the complexity of external wiring.

Level-adjustable plate kit for fixing robot

Attachment for forklifts

Adjustable mechanical stopper kit for 1st axis (VL)

Protection cover for connector panel


Non adjustable leveling plate for fixing robot

## VMB-2515 / 2518

### Features


#### High acceleration performance for high-speed motion

Although these are high-payload robots, their high acceleration and deceleration performance enable high-speed motion. They shorten the cycle times of various processes that require high productivity.



#### Used in contaminate-critical environments

In addition to the standard specifications, the lineup includes robots that comply with dust and splash resistance (IP67) and cleanliness standards (ISO class 5). They can be used to automate processes in a variety of industries, from automotive parts manufacturing and electrical/electronic parts to food, pharmaceutical, and medical equipment manufacturing processes.



Full-cover structure

#### Internal EtherCAT wiring for flexible hand design



2nd arm  
User wiring option

A wide variety of devices and hands can be mounted on the robot flange with options for user wiring, piping, and solenoid valves. The 2nd arm user wiring allows up to two EtherCAT lines to be wired internally. The 3-axis wiring option prevents tangling and wear on the external wiring/piping.



3-axis wiring option

### Options

External battery extension unit

Level-adjustable plate kit for fixing robot

Attachment for forklifts

Brake release unit

Non adjustable leveling plate for fixing robot

Adjustable mechanical stopper kit for 1st axis

# VLA Series

RC9 ▶ P.44

## VLA-4025 / 6022

With a maximum payload of 60 kg and arm reach of 2,257 mm, these models can be used in processes such as palletizing, inspection, loading, transport, and packaging.



Maximum arm reach	2,503 / 2,257 mm
Maximum payload	40 / 60 kg

### Specifications

item		Specification	
Model		VLA-4025	VLA-6022
Axes		6	
Position detection system		Absolute Encoder	
Drive motor/brake		All axes AC servo motor/All axes with brake	
Total arm length (Arm 1 + Arm 2)		2085.5(860+1225.5) mm	1835.5(860+975.5) mm
Maximum operating area		2503 mm (Point P: 4th, 5th, 6th axis center)	2257 mm (Point P: 4th, 5th, 6th axis center)
Operating angle	1st axis	-180° ~ 180°*1	
	2nd axis	-60° ~ 125°	
	3rd axis	-160° ~ 0°	
	4th axis	-2700° ~ 2700°*4	
	5th axis	-123° ~ 123°	
	6th axis	-2700° ~ 2700°*4	
Maximum payload		40kg	60kg
Position repeatability (at the center of an end-effector mounting face)*2		In each of X, Y and Z directions: ±0.06 mm	
Maximum allowable moment	Around 4th	167 N·m	221 N·m
	Around 5th	167 N·m	221 N·m
	Around 6th	98 N·m	118 N·m
Air piping		1 system (inner diameter: φ12.5)	
Signal line		14-core (19-core connector)	
		15-core (17-core connector)*3	
Air source	Allowable maximum pressure	2.0 MPa	
Noise (Equivalent continuous A-weighted sound pressure level)		75 dB	
Protection class		Main unit: IP65 / Wrist: IP67	
Weight		Approx. 655 kg	Approx. 645 kg

\*1 : The operating angle is limited when the robot is installed at an angle. \*2 : Position repeatability is the accuracy at constant ambient temperature.

\*3 : Can be used as PROFIBUS / PROFINET / DeviceNet using wiring. \*4: 800(±400) at the factory default settings.

### Legend

VLA -         W5

Maximum payload:  
40: 40 kg  
60: 60 kg

Total arm length:  
25: 2,503 mm  
22: 2,257 mm

Environmental Resistance  
Wrist: IP67, Main unit: IP65

# VMB Series

RC9 ▶P.44

## VMB-2515 / 2518

High acceleration performance enables high-speed motion.

The robots are suitable for transporting large items and palletizing processes, helping automate tasks involving heavy items.



Maximum arm reach	1,506 / 1,804 mm
Maximum payload	25 kg

### Specifications

item			Specification		
Model			VMB-2515	VMB-2518	
Axes			6		
Drive motor/brake			All axes AC servo motor/All axes with brake		
Total arm length (Arm 1 + Arm 2)			1395(710+685) mm	1695(860+835) mm	
Maximum operating area			1506 mm (Point P: 4th, 5th, 6th axis center)	1804 mm (Point P: 4th, 5th, 6th axis center)	
Operating range	1st axis		-170° ~ 170°*1		
	2nd axis		-100° ~ 140°		
	3rd axis		-130° ~ 170°		
	4th axis		-200° ~ 200°		
	5th axis		-145° ~ 145°		
	6th axis		-360° ~ 360°		
Maximum payload			25 kg		
Position repeatability (at the center of an end-effector mounting face)*2			In each of X, Y and Z directions: ±0.05 mm		
Maximum allowable moment	Around 4th		52 N·m		
	Around 5th		52 N·m		
	Around 6th		52 N·m		
Air piping	2nd arm unit	Without option	2 systems (φ8 × 2)		
		With option	1 system (φ8 × 1) Solenoid valves dedicated 8 systems(φ6 × 8) - Select a combination of solenoid valves from a, b and c. a. 2-position, Double Solenoids b. 3-position, Exhaust Center Solenoids c. 3-position, Closed Center Solenoids		
	3-axis unit	Without option	0		
		With option	1 system (φ8 × 1)		
	Signal line, Ethernet	2nd arm unit	Without option	Signal line : 15 Ethernet cable : 1	
			With option	Signal line : 15 + 10*3 Ethernet cable : 1 + 1	
3-axis unit		Without option	Signal line : 0		
		With option	Signal line : 10		
Air source		Operating pressure	0.20~0.39 MPa		
		Allowable maximum pressure	0.49 MPa		
Noise (Equivalent continuous A-weighted sound pressure level)			75 dB		
Protection class			Standard type : IP40 Protected Type : IP67		
Clean level (ISO 14644-1)			Class 5 (Cleanroom type)		
Pollution degree*4			Standard type : 2*5 Protected Type : 3 Cleanroom Type : 2		
Main unit weight			Approx. 230 kg	Approx. 250 kg	

\*1 : The movable range is narrower if the unit is installed on a wall or tilted. \*2 : Position repeatability is the accuracy at constant ambient temperature.

\*3 : The allowable current is limited. \*4 : Compliant with IEC 60664-1. \*5 : Pollution degree 2 environment is equivalent to home and office areas.

### Legend

VMB - ☐ ☐ ☐ ☐ ☐ ☐

Maximum payload:  
25: 25 kg

Total arm length:  
15: 1,506 mm  
18: 1,804 mm

Environmental Resistance:  
- : Standard Type (IP40)  
W7 : Protected Type (IP67)  
C5 : Cleanroom Type (ISO class 5)

## Selecting VMB robot options

When ordering a VMB robot, please select options 1 to 4 below.

### 1 Robot + Controller Set

Select from the eight different set part numbers **[Selection required]**



VMB Robot

RC9 Controller

Model	Part Name	Model	Part Name
VMB-2515/RC9M-M	Reach 1,500 mm	VMB-2518/RC9M-M	Reach 1,800 mm
VMB-2515/RC9M-P	Payload 25 kg	VMB-2518/RC9M-P	Payload 25 kg
VMB-2515W7/RC9M-M		VMB-2518W7/RC9M-M	
VMB-2515W7/RC9M-P		VMB-2518W7/RC9M-P	
VMB-2515C5/RC9M-M		VMB-2518C5/RC9M-M	
VMB-2515C5/RC9M-P		VMB-2518C5/RC9M-P	
	IP40/RC9M NPN		IP40/RC9M NPN
	IP40/RC9M PNP		IP40/RC9M PNP
	IP67/RC9M NPN		IP67/RC9M NPN
	IP67/RC9M PNP		IP67/RC9M PNP
	Clean ISO5/RC9M NPN		Clean ISO5/RC9M NPN
	Clean ISO5/RC9M PNP		Clean ISO5/RC9M PNP

### 2 Solenoid Valve

If a solenoid valve option is required, select one type. If it is not required, there is no need to select an option.



	①	②	③	④		①	②	③	④		Model		Model
1	2PD	2PD	2PD	2PD	9	2PD	3PE	3PC	3PC	1	Solenoid valve OP 2PD × 4	9	Solenoid valve OP 2PD × 1 / 3PE × 1 / 3PC × 2
2	2PD	2PD	2PD	3PE	10	2PD	3PC	3PC	3PC	2	Solenoid valve OP 2PD × 3 / 3PE × 1	10	Solenoid valve OP 2PD × 1 / 3PC × 3
3	2PD	2PD	2PD	3PC	11	3PE	3PE	3PE	3PE	3	Solenoid valve OP 2PD × 3 / 3PC × 1	11	Solenoid valve OP 3PE × 4
4	2PD	2PD	3PE	3PE	12	3PE	3PE	3PE	3PC	4	Solenoid valve OP 2PD × 2 / 3PE × 2	12	Solenoid valve OP 3PE × 3 / 3PC
5	2PD	2PD	3PE	3PC	13	3PE	3PE	3PC	3PC	5	Solenoid valve OP 2PD × 2 / 3PE × 1 / 3PC × 1	13	Solenoid valve OP 3PE × 2 / 3PC × 2
6	2PD	2PD	3PC	3PC	14	3PE	3PC	3PC	3PC	6	Solenoid valve OP 2PD × 2 / 3PC × 2	14	Solenoid valve OP 3PE × 1 / 3PC × 3
7	2PD	3PE	3PE	3PE	15	3PC	3PC	3PC	3PC	7	Solenoid valve OP 2PD × 1 / 3PE × 3	15	Solenoid valve OP 3PC × 4
8	2PD	3PE	3PE	3PC						8	Solenoid valve OP 2PD × 1 / 3PE × 2 / 3PC × 1		

### 3 Internal Wiring / Piping Options

Select from 48 types **[Selection required]**



- (1) Standard wiring/piping
  - (2) Standard wiring/piping + 2nd arm wiring/piping option
  - (3) Standard wiring/piping + J3 axis wiring/piping option
  - (4) Standard wiring/piping + 2nd arm wiring/piping option + J3 axis wiring/piping option
- \*In the case of standard wiring/piping ((1) above), a part number must also be selected.

Specification to be selected						Product name
Reach	Protected	Solenoid valve OP	2nd arm OP	3-axis OP		
1	1500	IP40	—	—	—	Internal wiring/piping specifications: 1,500 mm / IP40
2			—	—	○	
3			—	○	—	
4			—	○	○	
5			○	—	—	
6			○	—	○	
7			○	○	—	
8			○	○	○	
9		IP67	—	—	—	Internal wiring/piping specifications: 1,500 mm / IP67
10			—	—	○	
11			—	○	—	
12			—	○	○	
13			○	—	—	
14			○	—	○	
15			○	○	—	
16			○	○	○	
17		Clean ISO5	○	—	—	Internal wiring/piping specifications: 1,500 mm / ISO5
18			○	—	○	
19			○	○	—	
20			○	○	○	
21			—	—	—	
22			—	—	○	
23			—	○	—	
24			—	○	○	

Specification to be selected						Product name
Reach	Protected	Solenoid valve OP	2nd arm OP	3-axis OP		
25	1800	IP40	—	—	—	Internal wiring/piping specifications: 1,800 mm / IP40
26			—	—	○	
27			—	○	—	
28			—	○	○	
29			○	—	—	
30			○	—	○	
31			○	○	—	
32			○	○	○	
33		IP67	—	—	—	Internal wiring/piping specifications: 1,800 mm / IP67
34			—	—	○	
35			—	○	—	
36			—	○	○	
37			○	—	—	
38			○	—	○	
39			○	○	—	
40			○	○	○	
41		Clean ISO5	○	—	—	Internal wiring/piping specifications: 1,800 mm / ISO5
42			○	—	○	
43			○	○	—	
44			○	○	○	
45			—	—	—	
46			—	—	○	
47			—	○	—	
48			—	○	○	

### 4 Power Cable

Select from two types **[Selection Required]**




RC9 controller

- (1) Power cable 200 V
- (2) Power cable 400 V

Part Name
1 AC power cable (200 V, 10 m)
2 AC power cable (400 V, 10 m)


■ VM (without transformer)

Select 200 V power cable.




■ VM (shipped with transformer assembly)

Select 400 V power cable.




■ VL (without transformer)

Select 400 V power cable.



■ VL (shipped with transformer assembly)

Select 200 V power cable.




# VS Series

## VS050 / 060 / 068 / 087

Boasts top-performing speed in its class to greatly improve productivity. Slim arm of wide movable range enables various types of robot layouts.

Maximum arm reach	505 / 605 / 710 / 905 mm
Maximum payload	4 / 4 / 7 / 7 kg
Standard cycle time	0.35 / 0.35 / 0.31 / 0.34 sec
Position repeatability	±0.02 / 0.02 / 0.02 / 0.03 mm

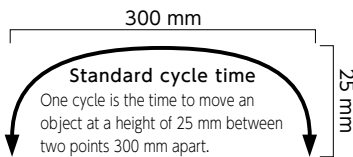

VS060

VS087

### Specifications

Item		Specifications			
Model		VS050	VS060	VS068	VS087
Axes		6			
Position detection method		Absolute encoder			
Drive motor / brake		All-axis AC servo motor / all-axis brake with brakes			
Total arm length (No. 1 arm + No. 2 arm)		505 (250 + 255) mm	605 (305 + 300) mm	680 (340 + 340) mm	875 (445 + 430) mm
Maximum motion area (Point P)		505 mm	605 mm	710 mm	905 mm
Motion range	1st axis	±170° *5			
	2nd axis	±120°		+135°, −100°	
	3rd axis	+151°, −120°	+155°, −125°	+153°, −120°	+153°, −136°
	4th axis	±270°			
	5th axis	±120° *6		±120°	
	6th axis	±360°			
Maximum payload		4 kg		7 kg	
Maximum joint speed	1st axis	425 deg/sec		356.25 deg/sec	285 deg/sec
	2nd axis	340 deg/sec	283.33 deg/sec	303 deg/sec	252.5 deg/sec
	3rd axis	385.72 deg/sec	309.35 deg/sec	378.75 deg/sec	303 deg/sec
	4th axis	425 deg/sec		475 deg/sec	378.75 deg/sec
	5th axis	327.01 deg/sec		475 deg/sec	378.75 deg/sec
	6th axis	680 deg/sec		760 deg/sec	606 deg/sec
Standard cycle time *1		0.35 sec		0.31 sec	0.34 sec
Position repeatability (at the center of a tool mounting face) *2		±0.02 mm			
Maximum allowable moment of inertia	4th axis, 5th axis	0.2 kgm <sup>2</sup>		0.45 kgm <sup>2</sup>	
	6th axis	0.05 kgm <sup>2</sup>		0.1 kgm <sup>2</sup>	
Maximum allowable moment	4th axis, 5th axis	6.66 Nm		16.2 Nm	
	6th axis	3.13 Nm		6.86 Nm	
Signal lines / Air pipe solenoid valve (option)	Signal lines	10 (for proximity sensor signals, etc.) *7,8			
	Air pipe solenoid valve	5 systems (ø4 × 4, ø4 × 1)*3 2 × solenoid valves (2 position, double solenoid) Cleanroom type has 4 systems (ø4 × 4).		7 systems (ø4 × 6, ø6 × 1) *4 [solenoid valves can be selected from 1 to 3] 1. 3 × solenoid valves (2 position, double solenoid) 2. 3 × solenoid valves (3 position, exhaust center solenoid) 3. 3 × solenoid valves (3 position, closed center solenoid) Cleanroom type has 6 systems (ø4 × 6).	
Communication interface flange-A (option) *Standard type only		17 (power wire for cameras, etc.) *8 LAN×1 (1000BASE-T) *9			
Air source	Normal pressure	0.20 to 0.39 MPa			
	Maximum allowable pressure	0.49 MPa			
Airborne noise (equivalent continuous A-weighted sound pressure level)		65 dB or less			
Protection grade		Protected type: IP67 *10 (option) Dust & splash proof type: wrist IP65 / unit IP54 (option) Cleanroom type: ISO class 3 / 5 (option)			
Weight		Approx. 27 kg	Approx. 28 kg	Approx. 49 kg	Approx. 51 kg

\*1: Time required for a robot to move a 1 kg payload between two points 300 mm apart at a height of 25 mm. \*2: Position repeatability is the precision at constant ambient temperature.

\*3: Controllable by use of the embedded solenoid valve only for ø4×4. \*4: Controllable by use of the embedded solenoid valve only for ø4×6. \*5: Limited motion range when wall mounted. For details, please contact our sales representative.


\*6: When communication interface flange-A is selected, the motion range of J5 is +120° and -110°. \*7: There are 4 of these lines (for proximity sensor signals, etc.) when selected together with communication interface flange-A.

\*8: Allowable current is limited. \*9: The LAN cable to connect to the connector panel is 20 m or shorter.

\*10: The robot interior is air-pressurized to maintain protective class IP67. Use the air-purge unit to remove air. Do not use the robot underwater.

## Options


### Connector panel



Rear connector panel Bottom connector panel

Choose from two mounting orientations when connecting cables (main unit connecting cable, etc.) to the robot for increased flexibility to accommodate the robot installation conditions.


### Flange



Communication interface flange-A


The flange has connectors for electrical signal lines and EtherNet, allowing wiring to be embedded in the robot unit.

### Signal lines / Air pipe solenoid valve



Signal lines and air pipe solenoid valves are embedded in the top of the second arm. Three varieties are available for VS068 / 087 and one for VS050 / 060.

### Paint / Surface finish



If the protected type (IP67) is selected, the unit is left as aluminum. Standard paint is available in the special specification (option) when selecting IP67.

## User options

### External battery extension unit



Encoder backup battery installed outside the robot. Facilitates replacement of batteries and improves maintainability.

### Brake release unit



A switch that allows you to release the brake of each axis (the wiring of this switch is directly connected to the brake release signal of each axis).

### Air purge unit



The protected type (IP67) maintains an IP67 protect grade by air pressure produced inside the robot.

### Second arm cover (right-hand, with tapped holes)



This cover has tapped holes to secure wires for the robot's second arm.

Category	Part Name	VS050 / 060					VS068 / 087				
	Specification / Type	Standard	Protected (IP67)	Dust & splash proof (Wrist: IP65 Unit: IP54)	Cleanroom (ISO Class 5)	Cleanroom (ISO Class 3)	Standard	Protected (IP67)	Dust & splash proof (Wrist: IP65 Unit: IP54)	Cleanroom (ISO Class 5)	Cleanroom (ISO Class 3)
Connector panel	Rear connector panel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bottom connector panel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flange	Standard flange	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Communication interface flange-A	✓	—	—	—	—	✓	—	—	—	—
Signal lines / Air pipe solenoid valve	2 x solenoid valves (2 position, double solenoid)	✓	✓	✓	✓	✓	—	—	—	—	—
	3 x solenoid valves (2 position, double solenoid)	—	—	—	—	—	✓	✓	✓	✓	✓
	3 x solenoid valves (3 position, exhaust center solenoid)	—	—	—	—	—	✓	✓	✓	✓	✓
	3 x solenoid valves (3 position, closed center solenoid)	—	—	—	—	—	✓	✓	✓	✓	✓
User option	Air purge unit	—	✓	—	—	—	—	✓ <sup>*3</sup>	—	—	—
	Brake release unit <sup>*1</sup>	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	External battery extension unit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Main unit connecting cable angle	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Second arm cover (right-hand, with tapped holes) <sup>*2</sup>	✓	—	—	—	—	✓	—	—	—	—

\*1: The brake release unit provides IP67 and IP54 protection for the connection area and unit, respectively.

\*2: This cover is already mounted on the protected type, dust & splash proof type, and cleanroom type when shipped. The cover is an option on the standard type.

\*3: An air purge unit is necessary to keep the protection level, IP67.

## Legend

VS

-

A

V6

-

-

N

N

-

NNN

Model:

VS: 5- and 6-axis robots

Mounting orientation:

A: All directions

Axes:

V6: 6-axis

Compliant standard:

N: Standard specification

U: UL specification

Flange:

N: Standard flange

A: Communication interface flange-A<sup>\*1</sup>

Paint / Surface finish:

N: Standard colors<sup>\*2</sup>

A: Unpainted<sup>\*3</sup>

Total arm length:

050 A3: 505 mm

060 A3: 605 mm

068 A4: 680 mm

087 A4: 875 mm

Protected:

NN: Standard type

W7: Protected type (IP67)

W4: Dust & splash proof type (wrist: IP65, unit: IP54)

C3: Cleanroom type (ISO class 3)

C5: Cleanroom type (ISO class 5)

Connector panel:

N: Rear connector panel

A: Bottom connector panel

Signal lines / Air pipe solenoid valve:

A: 2 x solenoid valves (2 position, double solenoid)

B: 3 x solenoid valves (2 position, double solenoid)

C: 3 x solenoid valves (3 position, exhaust center solenoid)

D: 3 x solenoid valves (3 position, closed center solenoid)

N: Specification without signal lines / air pipe solenoid valve

\*1: Available when standard type is selected

\*2: When standard type is selected

\*3: When protected type (IP67) is selected (Standard colors are a special specification (option).)

For details, please contact our sales representative.

The data listed on this page is for the standard type. For other options, see our website.


# VM Series

RC8A ▶ P.50

## VM-6083 / 60B1

These models boast a maximum payload of 13 kg and ensure a large work area thanks to their slim body design. They're available in dust and splash proof types as well as cleanroom types, allowing them to be used in a variety of settings.

Maximum arm reach	1,021 / 1,298 mm
Maximum payload	13 kg <sup>*4</sup>
Standard cycle time	0.89 / 0.95 sec
Position repeatability	±0.05 / 0.07 mm

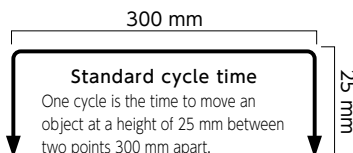

VM-60B1

### Specifications

Item		Specifications	
Model		VM-6083	VM-60B1
Axes		6	
Position detection method		Absolute encoder	
Drive motor / brake		All-axis AC servo motor / J2 to J6 with brakes	
Total arm length (No. 1 arm + No. 2 arm)		830 (385 + 445) mm	1,110 (520 + 590) mm
Arm offset	1st axis (rotation)	180 mm	
	3rd axis (forearm)	100 mm	
Maximum motion area (Point P)		1,021 mm	1,298 mm
Motion range	1st axis	±170°	
	2nd axis	+135°, -90°	
	3rd axis	+165°, -80°	+168°, -80°
	4th axis	±185°	
	5th axis	±120°	
	6th axis	±360°	
Maximum payload		13 kg <sup>*4</sup>	
Maximum joint speed	1st axis	180 deg/sec	150 deg/sec
	2nd axis	150 deg/sec	112.5 deg/sec
	3rd axis	200 deg/sec	150 deg/sec
	4th axis	262.5 deg/sec	
	5th axis	262.5 deg/sec	
	6th axis	420 deg/sec	
Standard cycle time <sup>*1</sup>		0.89 sec	0.95 sec
Position repeatability (at the center of a tool mounting face) <sup>*2</sup>		±0.05 mm	±0.07 mm
Maximum allowable moment of inertia	4th axis, 5th axis	0.36 kgm <sup>2</sup>	
	6th axis	0.064 kgm <sup>2</sup>	
User air pipe(s) <sup>*3</sup>		7 systems (ø4 × 6, ø6 × 1) 3 × solenoid valves (2 position, double solenoid) Cleanroom type: 6 systems (ø4 × 6)	
User signal line(s)		10 (for proximity sensor signals, etc.)	
Air source	Normal pressure	0.10 to 0.39 MPa	
	Maximum allowable pressure	0.49 MPa	
Airborne noise (equivalent continuous A-weighted sound pressure level)		80 dB or less	
Protection grade		Dust & splash proof type: wrist IP65 / unit IP54 (option) Cleanroom type: class 100	
Weight		Approx. 82 kg	

<sup>\*1</sup>: Time required for a robot to move a 5 kg payload between two points 300 mm apart at a height of 25 mm. <sup>\*2</sup>: Position repeatability is the precision at constant ambient temperature.

<sup>\*3</sup>: Controllable by use of the embedded solenoid valve only for ø4×6. <sup>\*4</sup>: If the payload exceeds 11 kg, wrist downward movement is limited to ±10°.

### Legend

<p style="text-align: center;"><b>VM - 60</b> <span style="border: 1px solid black; padding: 0 5px;">  </span> <span style="border: 1px solid black; padding: 0 5px;">  </span> - <span style="border: 1px solid black; padding: 0 5px;">  </span></p>			
Model:	Maximum payload:	Total arm length:	Options:
VM: Mid-sized 5- and 6-axis robot	0: 13 kg	83: 830 mm B1: 1,110 mm	None: Standard type V: Dust & splash proof type (wrist: IP65, unit: IP54) P: Cleanroom type (class 100)
Axes:			
6: 6th axis			

The data listed on this page is for the standard type. For other options, see our website.


# VS Series

RC8A ▶P50

## VS-6556 / 6577

The VS series 6556 / 6577 provides high speed and high power in a compact, slim body. A wide range of options are also available that allow operation in a wide range of environments.

Maximum arm reach	653 / 854 mm
Maximum payload	7 kg
Standard cycle time	0.49 / 0.59 sec
Position repeatability	±0.02 / 0.03 mm

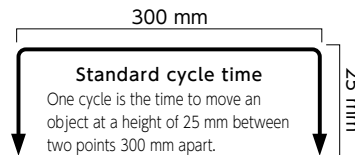

VS-6556-B

### Specifications

Item		Specifications	
Model		VS-6556	VS-6577
Axes		6	
Position detection method		Absolute encoder	
Drive motor / brake		All-axis AC servo motor / J2 to J4 with brakes (Brake expansion type: J2 to J6 with brakes)	
Total arm length (No. 1 arm + No. 2 arm)		565 (270 + 295) mm	770 (365 + 405) mm
Arm offset	1st axis (rotation)	75 mm	
	3rd axis (forearm)	90 mm	
Maximum motion area (Point P)		653 mm	854 mm
Motion range	1st axis	±170°	
	2nd axis	+135°, -100°	
	3rd axis	+166°, -119°	+169°, -119°
	4th axis	±190°	
	5th axis	±120°	
	6th axis	±360°	
Maximum payload		7 kg (Wrist downward movement is within ±45°) *4	
Maximum joint speed	1st axis	262.5 deg/sec	175 deg/sec
	2nd axis	240 deg/sec	200 deg/sec
	3rd axis	300 deg/sec	200 deg/sec
	4th axis	300 deg/sec	
	5th axis	300 deg/sec	
	6th axis	480 deg/sec	
Standard cycle time *1		0.49 sec	0.59 sec
Position repeatability (at the center of a tool mounting face) *1,2		±0.02 mm	±0.03 mm
Maximum allowable moment of inertia	4th axis, 5th axis	0.413 kgm <sup>2</sup>	
	6th axis	0.063 kgm <sup>2</sup>	
User air pipe(s) *3		7 systems (ø4 × 6, ø6 × 1) 3 × solenoid valves (2 position, double solenoid) Cleanroom type: 6 systems (ø4 × 6)	
User signal line(s)		10 (for proximity sensor signals, etc.)	
Air source	Normal pressure	0.10 to 0.39 MPa	
	Maximum allowable pressure	0.49 MPa	
Airborne noise (equivalent continuous A-weighted sound pressure level)		80 dB or less	
Protection grade		Dust & splash proof type: wrist IP65 / unit IP54 (option) Cleanroom type: class 10/100 (Option)	
Weight		Approx. 35 kg	Approx. 36 kg

\*1: Time required for a robot to move a 1 kg payload between two points 300 mm apart at a height of 25 mm. \*2: Position repeatability is the precision at constant ambient temperature.

\*3: Controllable by use of the embedded solenoid valve only for ø4×6. \*4: If wrist downward movement exceeds ±45°, the maximum payload is 6 kg.

### Legend

VS - 65 <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> - <span style="border: 1px solid black; padding: 0 5px;"> </span>			
Model: VS: Small 5- and 6-axis robot	Axes: 6: 6th axis	Standard payload: 5: 6 kg *The maximum payload is 7 kg	Total arm length: 56: 565 mm 77: 770 mm
Options: None: Standard type      B: With brakes W: Dust & splash proof type (wrist: IP65, unit: IP54) BW: Dust & splash proof type with brakes P: Cleanroom type: (class 10 / 100) BP: Cleanroom type with brakes			

The data listed on this page is for the standard type. For other options, see our website.


# VP Series

RC8A ▶ P.50

## VP-5243 / 6242

The VP series 5243/6242 is the most compact of all DENSO robots, and perfect for installation where motion space is limited.

Maximum arm reach	430 / 432 mm
Maximum payload	2.5 / 3 kg
Standard cycle time	0.99 sec
Position repeatability	±0.02 mm

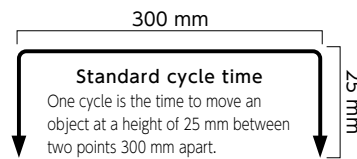

VP-6242

### Specifications

Item		Specifications	
Model		VP-5243	VP-6242
Axes		5	6
Position detection method		Absolute encoder	
Drive motor / brake		All-axis AC servo motor / all-axis with brakes	
Total arm length (No. 1 arm + No. 2 arm)		430 (210 + 220) mm	420 (210 + 210) mm
Arm offset	3rd axis (forearm)	—	75 mm
Maximum motion area (Point P)		430 mm	432 mm
Motion range	1st axis	±160°	
	2nd axis	±120°	
	3rd axis	+136°, -128°	+160°, +19°
	4th axis	—	±160°
	5th axis	±120°	
	6th axis	±360°	
Maximum payload		3 kg (wrist downward movement is within ±45°) <sup>*3</sup>	2.5 kg (wrist downward movement is within ±45°) <sup>*4</sup>
Maximum joint speed	1st axis	270 deg/sec	
	2nd axis	202.5 deg/sec	
	3rd axis	270 deg/sec	
	4th axis (*5)	—	324 deg/sec
	5th axis	324 deg/sec	
	6th axis	324 deg/sec	
Standard cycle time <sup>*1</sup>		0.99 sec	
Position repeatability (at the center of a tool mounting face) <sup>*2</sup>		±0.02 mm	
Maximum allowable moment of inertia	4th axis, 5th axis	0.04 kgm <sup>2</sup> <sup>*5</sup>	0.03 kgm <sup>2</sup>
	6th axis	0.01 kgm <sup>2</sup>	0.007 kgm <sup>2</sup>
User air pipe(s)		4 systems (ø4×4)	
User signal line(s)		9 (for proximity sensor signals, etc.)	
Air source	Normal pressure	0.10 to 0.39 MPa	
	Maximum allowable pressure	0.49 MPa	
Airborne noise (equivalent continuous A-weighted sound pressure level)		80 dB or less	
Weight		Approx. 13 kg	Approx. 15 kg

<sup>\*1</sup>: Time required for a robot to move a 1 kg payload between two points 300 mm apart at a height of 25 mm. <sup>\*2</sup>: Position repeatability is the precision at constant ambient temperature.

<sup>\*3</sup>: If wrist downward movement exceeds ±45°, the maximum payload is 2.5 kg. <sup>\*4</sup>: If wrist downward movement exceeds ±45°, the maximum payload is 2 kg. <sup>\*5</sup>: VP-5243 has no J4.

### Legend

<div> <div>VP - <span style="border: 1px solid black; padding: 0 5px;"> </span> 2 <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span></div> </div>			
Model:	Axes:	Standard payload:	Total arm length:
VP: Mini 5- and 6-axis robot	5: 5th axis 6: 6th axis	2: 2 kg (J6-axis) / 2.5 kg (J5-axis)	42: 420 mm (J6-axis) 43: 430mm (J5-axis)
* The maximum payload is 2.5 kg (J6-axis) or 3 kg (J5-axis)			

The data listed on this page is for the standard type.

# Pharmaceutical/Medical Robots

RC8A ▶ P.50

VS050S2

Winner of a 2014 Good Design Grand Award

DENSO delivers a robot that meets the strict demands of the pharmaceutical and medical industry.

Maximum arm reach	520 mm
Maximum payload	4 kg
Standard cycle time	0.35 sec

## Specifications

Item	Specifications
Model	VS050S2
Axes	6
Position detection method	Absolute encoder
Drive motor / brake	All-axis AC servo motor / all-axis with brakes
Total arm length (No. 1 arm + No. 2 arm)	520 (255 + 265) mm
Maximum motion area (Point P)	520 mm
Maximum motion radius (Point P)	183.5 mm
Motion range	1st axis
	±180° *3
	2nd axis
	+120°, -115°
	3rd axis
	+141°, -115°
	4th axis
	±270°
	5th axis
	±115° *4
	6th axis
	±360°
Maximum payload	4 kg
Maximum joint speed	1st axis
	425 deg/sec
	2nd axis
	283.33 deg/sec
	3rd axis
	309.35 deg/sec
	4th axis
	425 deg/sec
	5th axis
	272.96 deg/sec
	6th axis
	680 deg/sec
Standard cycle time *1	0.35 sec
Position repeatability (at the center of a tool mounting face) *2	±0.02 mm
Maximum allowable moment of inertia	4th axis, 5th axis
	0.2 kgm <sup>2</sup>
	6th axis
	0.05 kgm <sup>2</sup>
Maximum allowable moment	4th axis, 5th axis
	6.66 Nm
	6th axis
	3.13 Nm
Signal lines / air pipe solenoid valve (option)	Signal lines
	Air pipe solenoid valve
	Solenoid valve (2 position, double solenoid) × 2
Electric gripper connection flange specification-A (option)	Normal pressure
	0.20 to 0.39 MPa
Air source	Maximum allowable pressure
	0.49 MPa
Noise (A weighed equivalent continuous sound pressure level)	65 dB or less
Environmental resistance	Hydrogen peroxide environment
	35% hydrogen peroxide steam (dry / wet)
	Protection grade
	Wrist IP67 / Unit IP65
	Cleanliness
	ISO Class 5
Weight	Approx. 34 kg

\*1: Time required for a robot to move a 1 kg payload between two points 300 mm apart at a height of 25 mm. \*2: Position repeatability is the precision at constant ambient temperature.

\*3: Limited motion range when wall mounted. For details, please contact our sales representative. \*4: When electric gripper connection flange specification-A is selected, the J5 motion range is +110, -102.

\*5: This line (for proximity sensor signals, etc.) is 4-core if electric gripper connection flange specification-A is also selected. \*6: Allowable current is limited.

## Legend

<b>VS050S2 - A V6 - R1</b>									
<b>Model:</b>		<b>Mounting orientation:</b>		<b>Axes:</b>		<b>Connector panel:</b>		<b>Flange:</b>	
VS: 5- and 6-axis robots		A: All directions		6: 6th axis		A: Bottom connector panel		N: Standard flange	
<b>Total arm length:</b>		<b>Protected:</b>		<b>Compliant standard:</b>		<b>Signal lines / Air pipe solenoid valve:</b>		<b>Paint / Surface finish:</b>	
050S2: 505 mm, H <sub>2</sub> O <sub>2</sub> -resistant, RC8A compliant		R1: Cleanroom type (ISO class 5) (wrist: IP67, unit: IP65)		N: Standard specification U: UL specification		A: 2 x solenoid valves (2 position, double solenoid) N: Specification without signal lines / air pipe solenoid valve		A: Unpainted	

The data listed on this page is for the standard type. For other options, see our website.



VS050S2

Design registration No. 1507944/  
No. 1508175/  
No. 1508197/  
No. 1508203/  
No. 1518034/  
No. 1518035/  
No. 1518225

## Options

### Electric gripper connection flange specification-A

Internal mount with a gripper cable up to the flange. Suitable for clean environments, eliminates interference with peripherals.



### External mount battery

## Medical and pharmaceutical robot hands (option)

### Features



Electric gripper

Electric gripper cover kit

- Sterility resistance: H<sub>2</sub>O<sub>2</sub> gas (35% density) and UV exposure compliance
- Cleanliness: ISO class 4 (GMP grade A/B)\*
- Made with FDA-certified material

### Specifications

Item	Specifications
Grip force	60 N
Open/close stroke	2 × 3 mm
Power supply	24V ±10%
Protection grade	IP65
Cleanliness	ISO Class 4 (GMP Grade A/B)
I/O type	NPN / PNP selection
Unit weight	480 g (Hand unit + cover)*

\*The weight does not include the chuck. Prepare the chuck by yourself.

## 5th axis and 6th axis vertical articulated robots: List of robot operating ranges

### CVRB




COBOTTA PRO 1300

### CVR



COBOTTA PRO 900

COBOTTA®

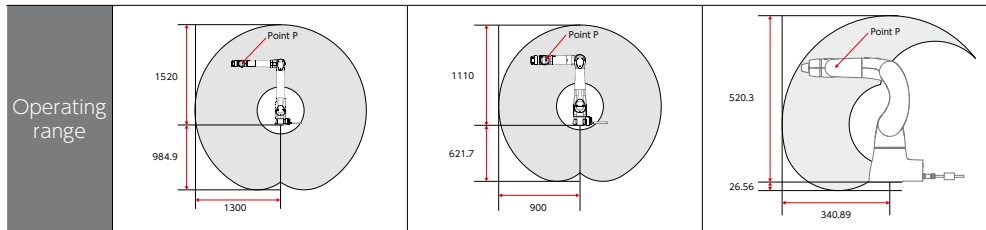

### VP Series



VP-5243

VP-6242


### VS Series



VS050



VS060

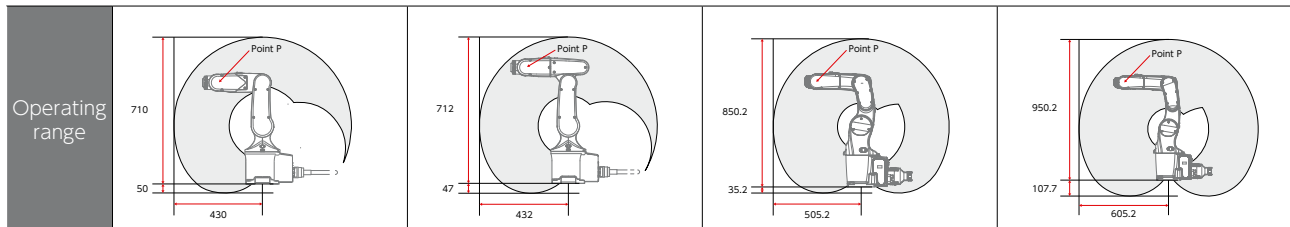

VS068




VS087



VS-6556-B

VS-6577-B

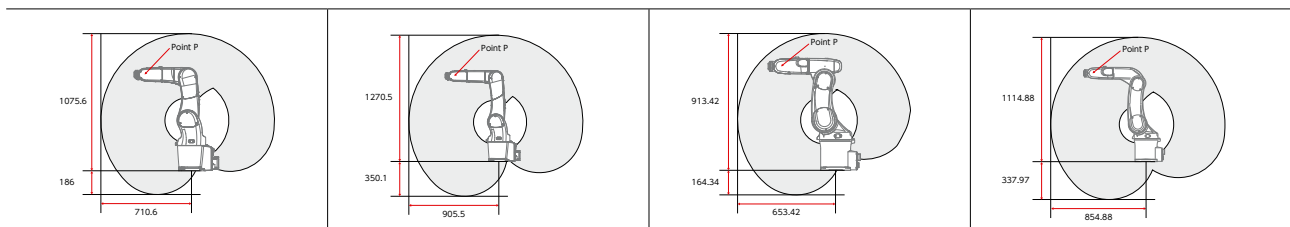

\*Gray range indicates the Point P operating range.

## VM Series



VM-6083

VM-60B1

## VMB Series



VMB-2515

VMB-2518

Operating range				
-----------------	--	--	--	--

## VLA Series



VLA-4025

VLA-6022

Operating range		
-----------------	--	--

## Pharmaceutical/medical robots



VS050S2

Operating range	
-----------------	--



## *4-AXIS ROBOTS*

### 4-AXIS ROBOTS

Standard model "HS-A1" and "HSR" capable of high-speed, high-precision continuous operation. "HM" features outstanding rigidity and transportability.

A wide-ranging lineup is available matched to processes and applications.

## Main features

Model		LPH	HSR*				HS-A1			HM*3							
		040	048	055	065	035	045	055	4060*	4A60*	4070*	4A70*	4085*	4A85*	40A0*	4AA0*	
Arm reach		400 mm	480 mm	550 mm	650 mm	350 mm	450 mm	550 mm	600 mm		700 mm		850 mm		1,000 mm		
Vertical stroke (Z)		150 mm	100 mm*4 200 mm 320 mm 510 mm				100 mm 150 mm 200 mm 320 mm			* = 1: 100 mm*5 * = A: 150 mm*5 * = 2: 200 mm * = 3: 300 mm * = 4: 400 mm				* = 1: 100 mm * = A: 150 mm * = 2: 200 mm * = 3: 300 mm * = 4: 400 mm			
Maximum payload		3 kg	8 kg				5 kg			10 kg	20 kg	10 kg	20 kg	10 kg	20 kg	10 kg	20 kg
Standard cycle time*1		0.45 sec (for 2 kg payload)	0.28 sec (for 2 kg payload)		0.31 sec (for 2 kg payload)	0.29 sec (for 2 kg payload)			0.29 sec (for 2 kg payload)				0.31 sec (for 2 kg payload)				
Position repeatability*2		±0.02 mm	±0.01 mm	±0.012 mm		±0.01 mm			±0.02 mm				±0.025 mm				
Standard type	Floor	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	Ceiling	—	✓	✓	✓	—	✓	✓	—	—	✓	✓	✓	✓	—	—	
Bellows type	Floor	—	✓	✓	✓	✓	✓	✓	—	—	—	—	—	—	—	—	
	Ceiling	—	✓	✓	✓	—	✓	✓	—	—	—	—	—	—	—	—	
Dust & splash proof type (IP65)	Floor	—	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	Ceiling	—	✓	✓	✓	—	✓	✓	—	—	✓	✓	✓	✓	—	—	
H1 grease type	Floor	—	✓	✓	✓	—	—	—	—	—	—	—	—	—	—	—	
	Ceiling	—	✓	✓	✓	—	—	—	—	—	—	—	—	—	—	—	
Cleanroom type*6	Floor	—	✓	✓	✓	✓	✓	✓	—	—	—	—	—	✓*8	—	✓*8	
	Ceiling	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
UL specifications	Floor	—	✓	✓	✓	✓	✓	✓	✓*7	✓*7	✓*7	✓*7	✓*7	✓*7	✓*7	✓*7	
	Ceiling	—	✓	✓	✓	—	—	—	—	—	—	—	—	—	—	—	

\*1: One cycle is the time taken to move an object at a height of 25 mm between two points 300 mm apart.

\*2: Position repeatability (at the center of a tool mounting face) is the precision at constant ambient temperature.

\*3: An asterisk [\*] in a model name indicates Z-axis stroke.

\*4: The Z-axis strokes of 100 mm, 200 mm, 320 mm and 510 mm are available only with the standard type. The Z-axis stroke values available for the dust and splash proof type, cleanroom type and bellows type are 170 mm, 290 mm and 450 mm. (Cleanroom type not available with 450 mm stroke.)

\*5: If the Z-axis stroke required is 100 mm or 150 mm, the dust & splash proof type cannot be selected.

\*6: The HSR<sup>\*</sup> series and HS-A1 series are ISO Class 3.

\*7: Standard/dust- and splash-proof types

\*8: Available Z-axis strokes are 200 mm and 300 mm.

## Robot list

### Standard type



This is a standard type used in standard environments.

### Ceiling type



Ceiling mount structure eliminates a waste of space, minimizes the entire equipment space, and expands the workable space.

### Bellows type



The Z-axis shaft of the standard type is mounted with a cover.

### Dust & splash proof type (IP65) / H1 grease type



Suitable for the work environments where equipment may be exposed to dust or water droplets, and the dust & splash proof performance of IP65 is provided. Also usable in the vicinity of the processing machine, where equipment might be exposed to oil or mist.

\*The H1 grease type may be selected for the HSR dust and splash-proof type only.

### Cleanroom type



Specification best suitable for automated and energy-saving production system in clean room, and ideal for electronic parts, food, and medical device-related work in clean room to realize the dust proof by highly-sealed structure as well as high cleanliness and high performance.

### UL specifications



UL/cUL certified products




# HSR®Series

## HSR®048/055/065

Accelerates quickly, runs continuously at high speed, and stops precisely.

“True high speed” has been realized in pursuit of this ultimate basic performance.

Arm reach	480 / 550 / 650 mm
Z-axis stroke	100 / 200 / 320 / 510 mm
Maximum payload	8 kg
Standard cycle time	0.28 / 0.31 sec
Position repeatability	±0.01 / 0.012 mm

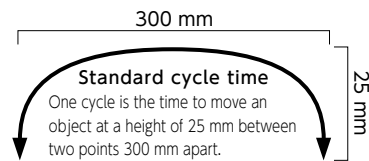

Design registration No. 1558886 / No. 1558887

HSR®055

### Specifications

Item		Specifications		
Model *1		HSR*048A1-N/S*	HSR*055A1-N/S*	HSR*065A1-N/S*
Total arm length (J1: No. 1 arm + J2: No. 2 arm)		205 + 275 = 480 mm	275 + 275 = 550 mm	375 + 275 = 650 mm
Motion range and stroke	1st axis	±130°		
	2nd axis	±143.5°	±150°	±150°
	Z (No. 3 axis) *	* = 10: 100 mm		
		* = 20: 200 mm		
		* = 32: 320 mm		
		* = 51: 510 mm		
T (No. 4 axis)	±360°			
Axis combinations		J1 (No. 1 axis) + J2 (No. 2 axis) + Z (No. 3 axis) + T (No. 4 axis)		
Maximum payload		8 kg		
Standard cycle time *2		0.28 sec	0.28 sec	0.31 sec
Maximum joint speed	1st axis	450 deg/sec	450 deg/sec	450 deg/sec
	2nd axis	785 deg/sec	785 deg/sec	785 deg/sec
	Z	10: 1,700 mm/sec, 20: 2,300 mm/sec, 32: 2,475 mm/sec		
	T	2,500 deg/sec		
Position repeatability (at the center of a tool mounting face) *3	1st axis + 2nd axis	±0.01 mm	±0.012 mm	±0.012 mm
	Z	±0.01 mm		
	T	±0.004°		
Maximum pressure input (downward)		98 N (1 second or less)		
Maximum allowable moment of inertia		0.12 kgm²		
Position detection method		Absolute encoder		
Drive motor / brake		All-axis AC servo motor / Z- and T-axis with brakes		
User air pipe(s)		4 systems (ø4×2, ø6×2)		
User signal line(s)		19 (for proximity sensor signals, etc.) Ethernet (8) *Option		
Air source	Normal pressure	0.05 to 0.35 MPa		
	Maximum allowable pressure	0.59 MPa		
Airborne noise		80 dB or less		
Weight		Approx. 31 kg	Approx. 31.5 kg	Approx. 32 kg

\*1: An asterisk [\*] in a model name indicates Z-axis stroke. \*2: Time required for a robot to move a 2 kg payload between two points 300 mm apart at a height of 25 mm.

\*3: Position repeatability is the precision at constant ambient temperature.

### Legend

The data listed on this page is for the standard type. For other options, see our website.

## Features

### High-speed motion

#### High acceleration & motion profiles

Improved CPM (cycle per minute) enables high-speed and prolonged motion.



\*The CPM changes depending on the coordinates.

### Continuous motion

#### Achieving non-stop continuous motion


Improved heat dissipation performance at the base unit allows the robot to achieve continuous motion over extended periods of time, which is required in actual processes.



### Light weight

#### Newly designed, highly rigid, lightweight arm

The combination of high rigidity and light weight allows the robot to achieve a high payload (8 kg) and high-speed motion at the same time.



## Options

#### Wiring sub-arm protection kit



Protects external wiring to prevent cables from becoming unorganized and avoid the risk of broken wires.

#### Built-in Ethernet



An Ethernet cable is built into the body. Easily connectable to external devices.

\*Ethernet connectors (sold separately) are available as options.

#### External battery specifications



The encoder backup battery installed outside the robot facilitates easy replacement of batteries and improved maintenance.

#### Stopper with wiring protector




This stopper can protect wiring that is installed through the hole of the bearing located at the top of the Z-axis shaft.

### Vibration control

#### Vibration control technique for suppressing vibrations

The robot can suppress vibrations in a short time by actively reflecting the status of the arm to vibration control. This can suppress vibrations that occur with high-speed transfer and residual vibrations, reducing the cycle time.



RC8A controller

### Improved flexibility in mounting direction

The mounting direction can be shifted by operating the shaft in the opposite direction.

Floor and ceiling mount models available.

\*If you need to change the mounting type, please contact our sales representative.



### Optimum layout

Optimized layout allows the robot to achieve high-speed motion.

Weight reduction at the tip of the arm and optimized arm structure made possible by integrating a high-capacity motor into the base unit allow the robot to improve its high-speed performance.




# HM Series

RC8A ▶ P.50

## HM-4060 / 4A60 / 4070 / 4A70 / 4085 / 4A85 / 40A0 / 4AA0

The HM series consists of a rich line-up of models with the maximum arm length and payload among DENSO 4-axis robots to meet specific needs.

Maximum arm reach	600 to 1,000 mm
Maximum payload	10 / 20 kg
Standard cycle time	0.29 / 0.31 sec
Position repeatability	±0.02 / 0.025 mm

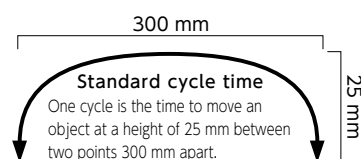

HM-40A0

### Specifications

Item		Specifications							
Model <sup>*1</sup>		HM-4060*	HM-4A60*	HM-4070*	HM-4A70*	HM-4085*	HM-4A85*	HM-40A0*	HM-4AA0*
Axes		4							
Position detection method		Absolute encoder							
Drive motor / brake		All-axis AC servo motor / Z-axis gravity balance air cylinder / Z-axis motor brake							
Total arm length (No. 1 arm + No. 2 arm)		600 (250 + 350) mm		700 (350 + 350) mm		850 (350 + 500) mm		1,000 (500 + 500) mm	
Motion range and stroke	1st axis	±165°							
	2nd axis	±143°		±147°					
	Z (No. 3 axis)	* = 1: 100 mm, * = A: 150 mm, * = 2: 200 mm, * = 3: 300 mm, * = 4: 400 mm							
	T (No. 4 axis)	±360°							
Maximum payload		10 kg	20 kg	10 kg	20 kg	10 kg	20 kg	10 kg	20 kg
Maximum joint speed	1st axis	449.74 deg/sec				412.26 deg/sec		374.78 deg/sec	
	2nd axis	667.5 deg/sec				611.87 deg/sec		556.25 deg/sec	
	Z	2,764.88 mm/sec				2,764.88 mm/sec			
	T	2,229.93 deg/sec	1,544.51 deg/sec	2,229.93 deg/sec	1,544.51 deg/sec	2,229.93 deg/sec	1,544.51 deg/sec	2,229.93 deg/sec	1,544.51 deg/sec
Standard cycle time <sup>*2</sup>		0.29 sec				0.31 sec			
Position repeatability (at the center of a tool mounting face) <sup>*3</sup>	1st axis + 2nd axis	±0.02 mm				±0.01 mm			
	Z					±0.025 mm			
	T					±0.005°			
Maximum pressure input (downward, for up to 1 sec)		98 N							
Maximum allowable moment of inertia		0.25 kgm <sup>2</sup>	0.45 kgm <sup>2</sup>	0.25 kgm <sup>2</sup>	0.45 kgm <sup>2</sup>	0.25 kgm <sup>2</sup>	0.45 kgm <sup>2</sup>	0.25 kgm <sup>2</sup>	0.45 kgm <sup>2</sup>
User air pipe(s)		4 systems (ø 6)							
User signal line(s)		24 (for proximity sensor signals, etc.)							
Air source	Normal pressure	0.05 to 0.35 MPa							
	Maximum allowable pressure	0.59 MPa							
Airborne noise (equivalent continuous A-weighted sound pressure level)		80 dB or less							
Protection grade		Dust & splash proof type: IP65 (option) Cleanroom type: ISO class 5 (option)							
Weight <sup>*3</sup>		Approx. 53 to 56 kg							

\*1: An asterisk [\*] in a model name indicates Z-axis stroke. \*2: Time required for a robot to move a 2 kg payload between two points 300 mm apart at a height of 25 mm.

\*3: Position repeatability is the precision at constant ambient temperature.

### Legend

<b>HM</b> <span style="border: 1px solid black; padding: 0 5px;">  </span> - <b>4</b> <span style="border: 1px solid black; padding: 0 5px;">  </span> <span style="border: 1px solid black; padding: 0 5px;">  </span> <span style="border: 1px solid black; padding: 0 5px;">  </span> - <span style="border: 1px solid black; padding: 0 5px;">  </span>						
<b>Model:</b> HM: Mid-sized 4-axis robot	<b>Robot type:</b> None: Floor S: Ceiling	<b>Axes:</b> 4: 4th axis	<b>Maximum payload:</b> 0: 10 kg A: 20 kg	<b>Total arm length:</b> 60: 600 mm 70: 700 mm 85: 850 mm A0: 1,000 mm	<b>Vertical stroke:</b> 1: 100 mm 2: 200 mm 3: 300 mm 4: 400 mm	<b>Options:</b> None: Standard type W: Dust & splash proof type (IP65) UL: UL specification C5: Cleanroom type (ISO class 5)

The data listed on this page is for the standard type. For other options, see our website.


# HS-A1 Series

RC8A ▶ P.50

## HS035 / 045 / 055

This is a fast, high-performance SCARA robot that specializes in high-speed movement in a small installation space and is suited to conveyance and assembly work.

Maximum arm reach	350 / 450 / 550 mm
Maximum payload	5 kg
Standard cycle time	0.29 sec
Position repeatability	±0.015 / 0.02 mm

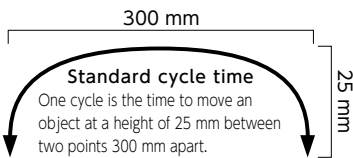

HS045A1

### Specifications

Item		Specifications		
Model *1		HS035A1-N*	HS045A1-N/S*	HS055A1-N/S*
Axes		4		
Position detection method		Absolute encoder		
Drive motor / brake		All-axis AC servo motor / Z- and T-axis with brakes		
Total arm length (No. 1 arm + No. 2 arm)		350 (125 + 225) mm	450 (225 + 225) mm	550 (325 + 225) mm
Motion range and stroke	1st axis	±155°		
	2nd axis	±145°		
	Z (No. 3 axis)	* = 10: 100 mm, * = 15: 150 mm, * = 20: 200 mm, * = 32: 320 mm,		
	T (No. 4 axis)	±360°		
Maximum payload		5 kg		
Maximum composite speed (at the center of a tool mounting face)	Arm end	7,200 mm/sec	6,300 mm/sec	7,100 mm/sec
	T	2,400/sec		
Maximum joint speed	1st axis	720 deg/sec	450 deg/sec	
	2nd axis	720 deg/sec		
	Z	2,000 mm/sec		
	T	2,400 deg/sec		
Standard cycle time *2		0.29 sec		
Position repeatability (at the center of a tool mounting face) *3	1st axis + 2nd axis	±0.015 mm	±0.02 mm	
	Z	±0.01 mm		
	T	±0.005°		
Maximum pressure input (downward, for up to 1 sec)		98 N		
Maximum allowable moment of inertia		0.1 kgm²		
User air pipe(s)		4 systems (ø4 × 2, ø6 × 2)		
User signal line(s)		19 (for proximity sensor signals, etc.)		
Air source	Normal pressure	0.05 to 0.35 MPa		
	Maximum allowable pressure	0.59 MPa		
Airborne noise (equivalent continuous A-weighted sound pressure level)		80 dB or less		
Protection grade		Dust & splash proof type: IP65 (option) Cleanroom type: ISO class 3 (option)		
Weight		Approx. 25 kg		

\*1: An asterisk [\*] in a model name indicates Z-axis stroke. \*2: Time required for a robot to move a 2 kg payload between two points 300 mm apart at a height of 25 mm.

\*3: Position repeatability is the precision at constant ambient temperature.

### Legend

<b>HS</b> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		<b>A1</b> - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		- <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		- <b>NNNNN</b> - <b>NNNN</b>	
<b>Model:</b> HS: 4-axis robots		<b>Mechanical type:</b> A1: Arm length 350 mm, 450 mm, 550 mm		<b>Z-axis stroke:</b> 10: 100 mm 15: 150 mm 20: 200 mm 32: 320 mm		<b>Protected:</b> NN: Standard type W5: Dust & splash proof type (IP65) C3: Cleanroom type (ISO class 3) JN: Bellows type	
<b>Total arm length:</b> 035: 350 mm 045: 450 mm 055: 550 mm		<b>Mounting orientation:</b> N: Standard S: Ceiling		<b>Compliant standard:</b> N: Standard specification U: UL specification		<b>Paint / surface finish:</b> N: Standard colors	

The data listed on this page is for the standard type. For other options, see our website.

# LPH Series

RC8A ▶ P.50

## LPH-040

multifunctional, low-cost SCARA robots  
with lightweight, compact designs


Maximum arm reach	400 mm
Maximum payload	3 kg
Position repeatability	±0.02 mm
Mounting orientation	Floor



### Features


#### Gripper design with high degree of freedom

The maximum moment of inertia of the T-axis is large in order to provide a gripper design with a high degree of freedom. Also supports use in other configurations including in an overhanging position.

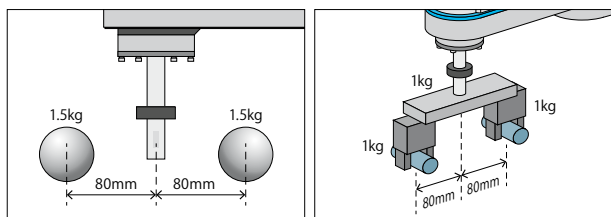

#### Reduction in work time without the use of PLC

The highly functional RC8 series controller\*4 is used for the integrated control of the robot and surrounding equipment. This reduces the total cost of equipment.

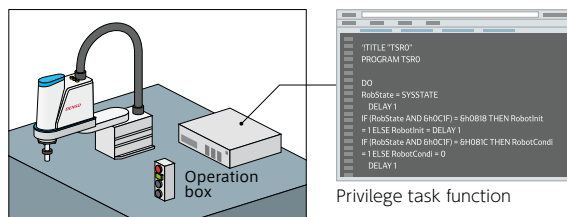

#### Enables control from PLC with no programming knowledge required

A function block (FB) that supports 130 types of robot commands allows a PLC to control the robot directly. This feature allows adjustments to be performed with only PLC knowledge without needing to create programs on the robot side, to realize a reduction in work time for initial adjustments at the start of use.

### Specifications

Item	Specifications
Model	LPH-040A1-N15-NNN-NNNNN-3NAN (*1)
Position detection method	Absolute encoder
Drive motor / brake	All-axis AC servo motor / Z-axis with brakes
Total arm length (No. 1 arm + No. 2 arm)	400 (200 + 200) mm
Motion range and stroke	1st axis
	±130°
	2nd axis
	±146.6°
Z (No. 3 axis)	150 mm
	T (No. 4 axis)
Axis combinations	±360°
	J1 (No. 1 axis) + J2 (No. 2 axis) + Z (No. 3 axis) + T (No. 4 axis)
Maximum payload	3 kg
Standard cycle time *2	0.45 sec
Maximum composite speed (at the center of a tool mounting face)	Arm end
	4,710 mm/sec
	Z
Position repeatability (at the center of a tool mounting face) *3	1,250 mm/sec
	T
	1,875 deg/sec
1st axis + 2nd axis	±0.02 mm
	Z
	0.02 mm
Maximum pressure input (downward, for up to 1 sec)	T
	±0.01°
	45 N (1 sec or less)
Maximum allowable moment of inertia	0.075 kgm <sup>2</sup>
User air pipe(s)	3 systems (ø4×2, ø6×1)
User signal line(s)	15 (for proximity sensor signals, etc.)
Air source	0.05 to 0.35 MPa
	Maximum allowable pressure
Weight	0.6 MPa
	Approx. 16 kg

\*1: This product cannot be sold in some countries. The main unit connecting cable is available only in a length of 3 m.

\*2: Time required for a robot to move a 2 kg payload between two points 300 mm apart at a height of 25 mm.

\*3: Position repeatability is the precision at constant ambient temperature.

\*4: The controller is from the RC8 series. Please contact DENSO for the specific model.

## 4-axis Robot Operating Range

### HSR<sup>®</sup> Series

HSR<sup>®</sup>055

### HM Series



HM-40702

### HS-A1 Series




HS045A1

### LPH



LPH-040

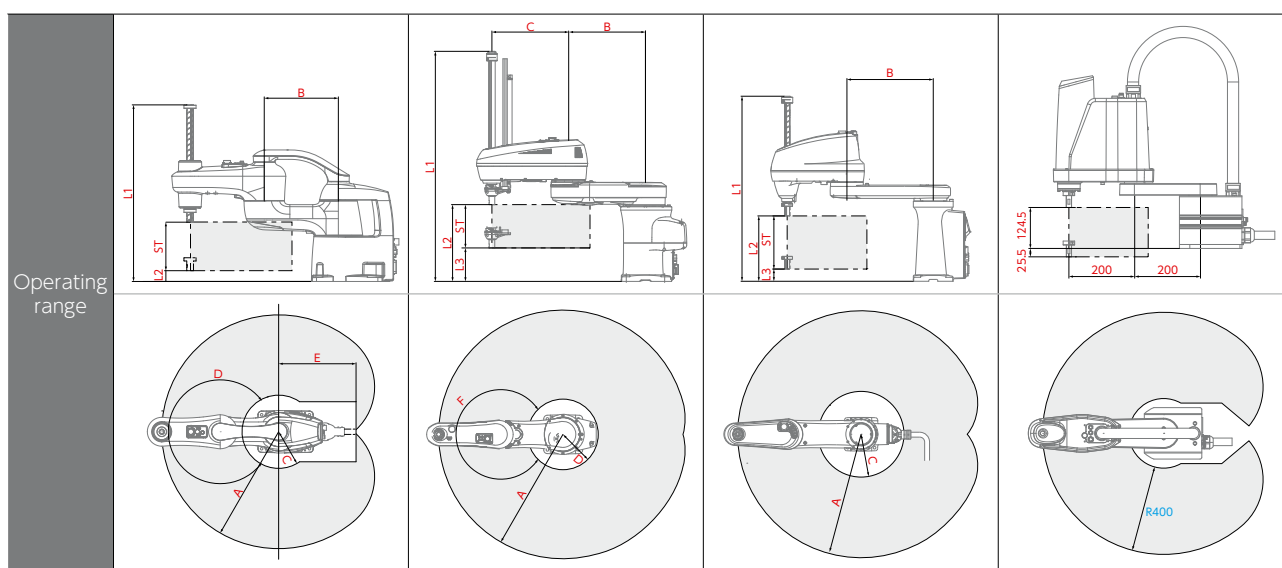

\*Gray range indicates the operating range.

For dimensions and other detailed information, see our website. Scan the QR Code to view the information.

### HSR Series

Model	A	B	C	D	E
HSR*048A1-N*	480	205	164.4	287°	406.53
HSR*055A1-N*	550	275	142.4	300°	364.32
HSR*065A1-N*	650	375	194.0	300°	287.62

Z-axis stroke: ST (mm)	L1	L2
* = 10: 100	555.2	120
* = 20: 200	655.2	20
* = 32: 320	775.2	-100 *1
* = 51: 510	965.2	-290 *1

### Z-axis stroke correspondence table

Z-axis stroke: ST (mm)	Standard type	Dust & splash proof type	Cleanroom type	Bellows type
100	✓	—	—	—
170	—	✓	✓	✓
200	✓	—	—	—
290	—	✓	✓	✓
320	✓	—	—	—
450	—	✓	—	✓
510	✓	—	—	—

\*1: If the Z-axis stroke is 320 mm or 510 mm, exercise caution concerning interference with peripheral equipment as when fully lowered, the Z-axis will reach a position lower than the base mounting face.

### HM Series

Model	A	B	C	D	F
HM-4060*, HM-4A60*	600	250	350	213	286°
HM-4070*, HM-4A70*	700	350	350	199	294°
HM-4085*, HM-4A85*	850	350	500	281	294°
HM-40A0*, HM-4A40*	1000	500	500	284	294°

\*1: If the Z-stroke is 400 mm, the lowest point of the Z-axis will achieve a position lower than the base mounting surface.

S	L1	L2	L3
(Z-axis stroke)	10 kg	20 kg	—
100	755	749	350
150	805	799	350
200	855	849	350
300	955	949	350
400 *1	1055	1049	350

### HS-A1 Series

Model	A	B	C
HS035*	350	125	143
HS045*	450	225	136
HS055*	550	325	191


Z-axis stroke: ST(mm)	L1	L2	L3
* = 10: 100	597	246	146
* = 15: 150	647	246	96
* = 20: 200	697	246	46
* = 32: 320	817	246	-74 *1

\*1: If the Z-axis stroke is 320 mm, exercise caution concerning interference with peripheral equipment as when fully lowered, the Z-axis will reach a position lower than the base mounting face.

The data listed on this page is for the standard type.

Ceiling mount made up of a linear-motion axis and pivot-motion axis allows the robot to work under itself while presenting a compact form-factor.

Maximum payload	5 kg
Standard cycle time	0.56 sec

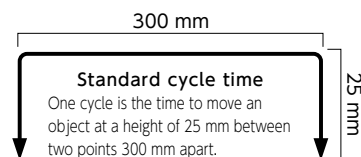

\*For dimensions, see our website.



Patent No. 4793376 / No. 5272647

## Specifications

Item		Specifications						
Model *1		XR-4341*	XR-4371*	XR-4372*	XR-4373*	XR-43A1*	XR-43A2*	XR-43A3*
Axes		4						
Position detection method		Absolute encoder						
Drive motor / brake		All-axis AC servo motor / Z-axis with brakes						
Total arm length (No. 1 arm + No. 2 arm)		200 mm		250 mm	300 mm	200 mm	250 mm	300 mm
Motion range and stroke	X (No. 1 axis)	450 mm	760 mm			1,060 mm		
	R (No. 2 axis)	±168°						
	Z (No. 3 axis)	* = 1: 135 mm, * = 2: 200 mm						
	T (No. 4 axis)	±360°						
Maximum payload		5 kg						
Maximum joint speed	X	1,650 mm/sec	1,600 mm/sec			1,240 mm/sec		
	R	572.94 deg/sec		458.35 deg/sec	382 deg/sec	572.94 deg/sec	458.35 deg/sec	382 deg/sec
	Z	2,250 mm/sec						
	T	720 deg/sec						
Standard cycle time *2		0.56 sec						
Position repeatability (at the center of a tool mounting face) *3	X + R	±0.015 mm						
	Z	±0.01 mm						
	T	±0.005°						
Maximum allowable moment of inertia		0.05 kgm²						
User air pipe(s)		1 air supply system (ø8) (4 systems (ø4 × 8) with optional manifold valve)						
User signal line(s)		10 (for proximity sensor signals, etc.)						
Air source	Normal pressure	0.05 to 0.35 MPa						
	Maximum allowable pressure	0.59 MPa						
Weight *4		Approx. 33 kg	Approx. 45 kg	Approx. 46 kg	Approx. 47 kg	Approx. 51 kg	Approx. 52 kg	Approx. 53 kg

\*1: An asterisk [\*] in a model name indicates Z-axis stroke.

\*2: Time required for a robot to move a 3 kg payload between two points 300 mm apart at a height of 25 mm.

\*3: Position repeatability is the precision at constant ambient temperature.

\*4: Heavy models (Z = 200 mm) are listed.

## Legend

XR - 4 3						
Model:	Axes:	Maximum payload:	X-axis stroke:	Total arm length:	Z-axis stroke:	
XR: Built-in robot	4: 4-axis	3: 5 kg	4: 450mm 7: 760mm A: 1060mm	1: 200mm 2: 250mm 3: 300mm	1: 135mm 2: 200mm	

The data listed on this page is for the standard type.

# SC Series

RC8A ▶P.50

A compact design based on a proprietary structure makes it possible to construct equipment that's ideally suited to transporting workpieces between processes.

## Compact structure that can accommodate a variety of equipment layouts

An expanding and contracting structure lets you minimize the width of the equipment's front surface.

## Long-distance, high-speed transport

Transport workpieces at high speeds of 2 m/sec over distances of up to 12 m.

## Interoperation of multiple units to accommodate fluctuations in production volume


Multiple robot units can be mounted on a single rail, allowing the number of units to be increased or decreased in response to production volume.



## Extensive range of options to accommodate a variety of tasks

Robot type	LZNN	LZZN	LYZN	LYZZ
Ball screw type Maximum payload 5kg				
Robot type	LSNN	LSSN	LZSN	LZSS
Retractable type Maximum payload 3kg				


## System configuration diagram \*: Option

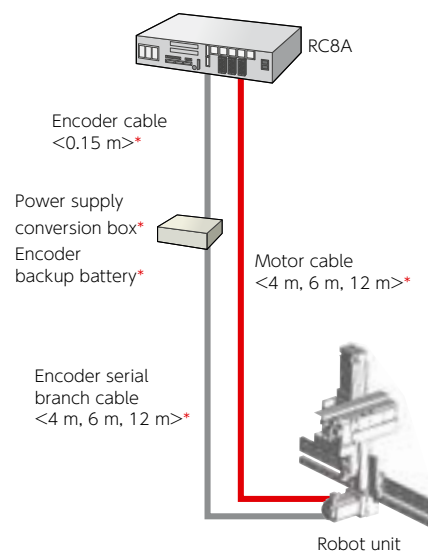

## Specifications

Item		Specifications							
Model		LZNN	LZZN	LYZN	LYZZ	LSNN	LSSN	LZSN	LZSS
Axis operating range stroke	1st axis	600 to 12,000 mm				600 to 12,000 mm			
	2nd axis	100 mm, 200 mm		100 mm		300 mm, 400 mm		100 mm, 200 mm	
	3rd axis	—	100 mm, 200 mm	100 mm, 200 mm		—	300 mm, 400 mm	300 mm, 400 mm	
	4th axis	—			100 mm, 200 mm	—			300 mm, 400 mm
Maximum payload		5 kg / Z				3 kg / S (with S stroke of 400, 2 kg / S)			
Maximum joint speed	1st axis	2,000 mm/sec				2,000 mm/sec			
	2nd axis	500 mm/sec				1,000 mm/sec		500 mm/sec	
	3rd axis	—	500 mm/sec			—	1,000 mm/sec		
	4th axis	—			500 mm/sec	—		1,000 mm/sec	
Position repeatability		L: ±0.05 mm / Y, Z: ±0.02 mm				L, S: ±0.05 mm / Y, Z: ±0.02 mm			
Brake		2nd axis	2nd axis, 3rd axis	3rd axis	3rd axis, 4th axis	—		2nd axis	
Weight		Approx. 7 kg	Approx. 9 kg	Approx. 10 kg	Approx. 12 kg	Approx. 9 kg	Approx. 12 kg	Approx. 13 kg	Approx. 16 kg

## Legend

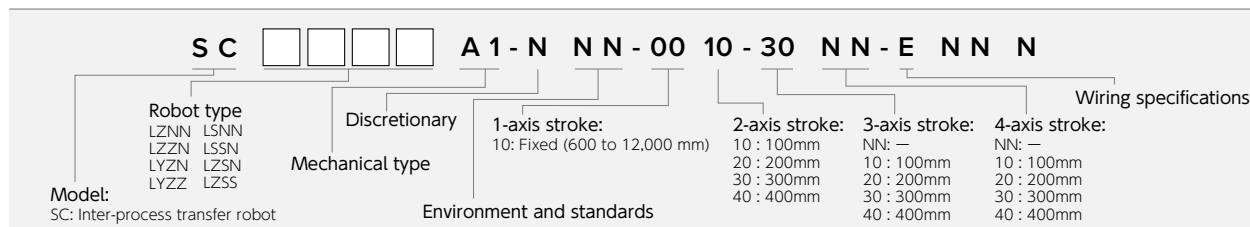

The data listed on this page is for the standard type.

# *Robot controllers*

## Robot controllers

The RC9/CRC9 robot controller provides equipment integration control and an integration development environment that inherits the DENSO Robotics development environment.

You can use it to build systems with original robot control and safety performance.

It delivers the ease of use that customers require.



## Robot controllers

### RC9



6th axis

Robot Type

VMB / VLA

Size	VMB: W600 × D581 × H690	Weight	VMB: Approx. 93 kg
	VLA: W600 × D581 × H840		VLA: Approx. 104 kg

### CRC9



6th axis

Robot Type

COBOTTA PRO

Size	Standard type: W425 × D362 × H194	Weight	Standard type: Approx. 15 kg
	Dust & splash proof type (IP54): W420 × D461 × H200		Dust & splash proof type (IP54): Approx. 18 kg

### RC8A



6th axis



4th axis



Build in Type



Transfer Robot

Robot Type

VP / VS / VM / HSR / HS-A1 / HM / XR / SC

Size	W357 × D320 × H94 mm	Weight	10 kg
------	----------------------	--------	-------

## Motion controller

### MC8A



motor

Motor Type

30 / 50 / 100 / 200 / 400 / 750 / 1000W

Size	MC8A: W357 × D320 × H94 mm	Weight	10 kg
	MC8: W357 × D300 × H94 mm		

# RC9/CRC9

DENSO is developing robot controllers with the aim of creating a robot language that anyone can use, while considering standardization and openness in the development environment.

We have been developing JIS-compliant industrial programming languages since the 1990s, and released the Windows OS-compatible middleware “ORiN,” which offers excellent connectivity with peripheral devices.

In recent years, the introduction of robots into various industries has led to an expansion of applications and links with general-purpose software.


The RC9/CRC9 robot controllers adapt to the increasing sophistication and complexity of robot control equipment while maintaining the legacy development environment.



## Achieving DENSO robots' goal of simplification

The RC9/CRC9 controllers allow you to select the most suitable robot, peripheral equipment, and software for your application. The integrated control of robots and peripheral devices expands the range of automation from simple tasks to complex work. Furthermore, to create an integrated development environment suitable for all related workers, from experienced engineers to people unfamiliar with robots, various tools are provided, such as new functions, teaching devices, and application software. These features deliver simplicity and peace of mind for everyone involved in robot start-up and operation.


\* CRC9 is a dedicated controller for COBOTTA PRO, which was developed based on RC9.

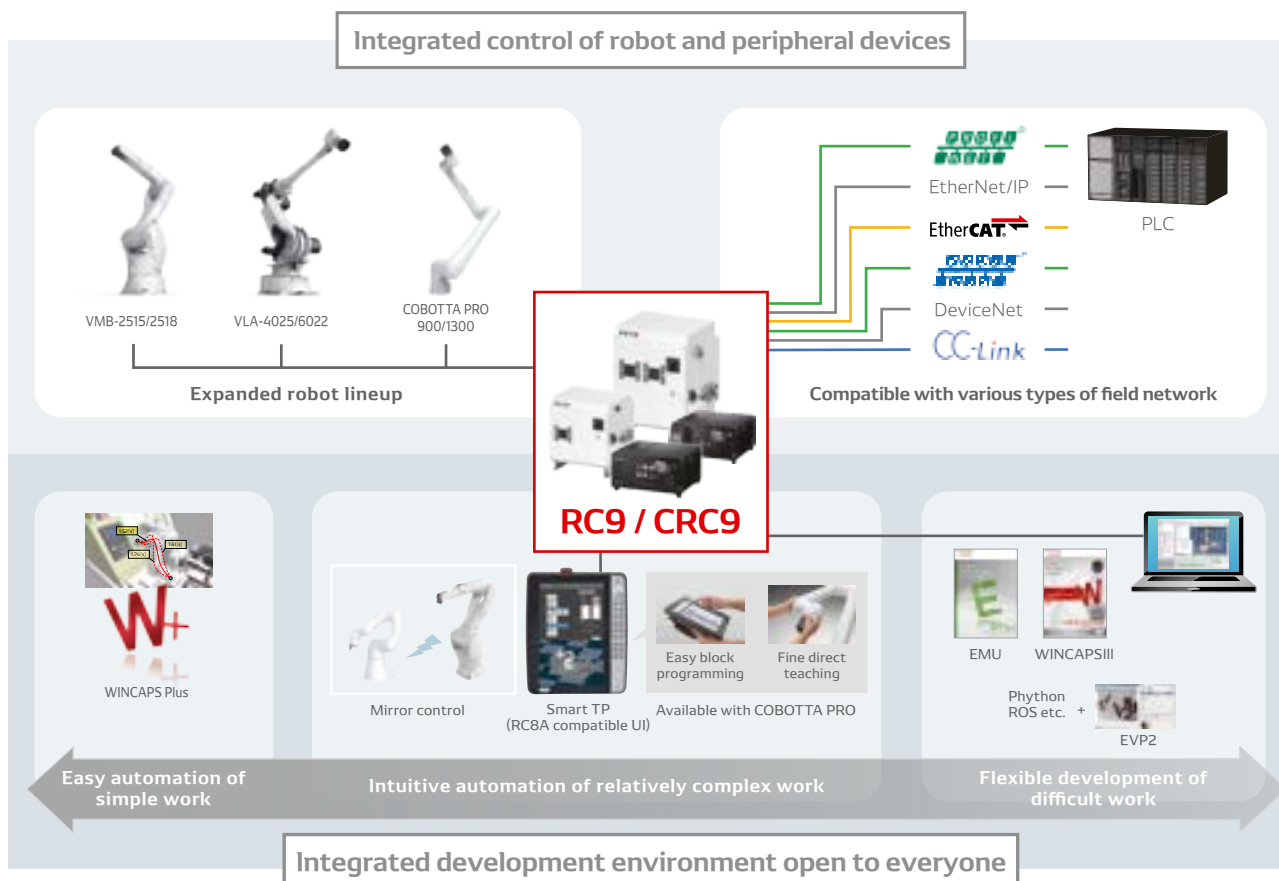




## Controller for integrated equipment control

Combining selectivity for optimization according to the application, openness for integration of the user, system integrator, and manufacturer technologies (\* CRC9 is under development), and expandability for simple integration of the entire system, the RC9/CRC9 controller achieves simple integrated equipment control.

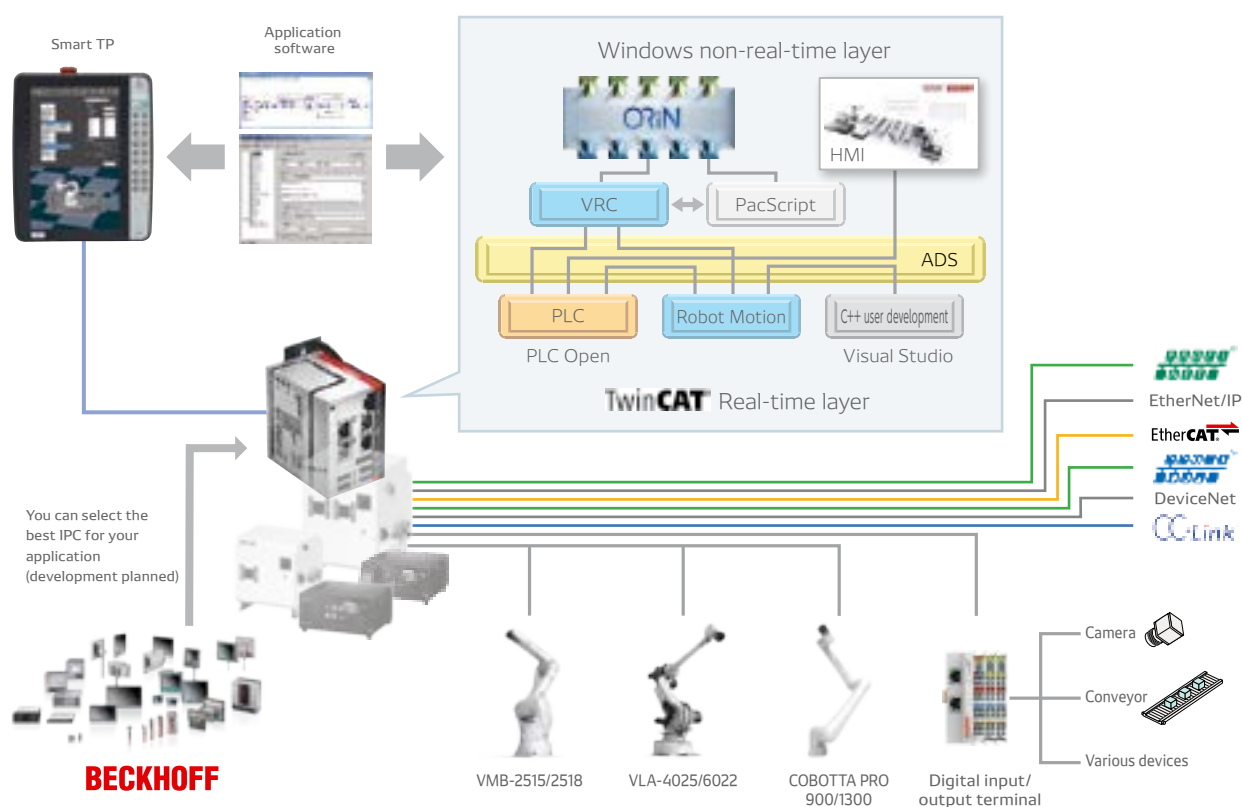

- A single IPC can be used for the integrated control of the robot and peripheral devices, enabling simplification with a stand-alone device
- Supports various development environments, not only the robot language. Provides the ease-of-use of familiar environments
- Software PLC\* and image processing software\* are built into the robot controller    \*Options



The diagram illustrates the architecture of a Windows-based control system. It features a **Smart TP** (Human Machine Interface) connected to a **PLC** (RC9). The PLC is connected to a **Windows-based control system**. This system is divided into two layers: the **Windows non-realtime layer** and the **IwateCAT realtime layer**. The non-realtime layer includes **Application software**, **HMI**, **VRC**, and **PacScript**. The realtime layer includes **TcCOM**, **PLC**, **Robot Motion**, **C++ user development**, and **Visual Studio**. The IwateCAT logo is at the bottom.

## ■ EVP2 image processing software is built into controller \*Options


EVP2 can be built into the robot controller to enable central control from the robot program. The image processing settings are configured in the application (EVP2 Guidance) on the PC, and the robot and camera calibration can be easily set with a wizard-like GUI. Also, during execution (EVP2 Runtime), operation is possible only on the robot controller and connected cameras. As a result, the configuration is simple. It does not require an image processor or communication program to transmit the image processing results to the robot, thus providing easy and space-saving image processing.

\* EVP2: A robot vision application software package that utilizes DENSIO robots and cameras to support equipment startup.



## ■ Smart TP used as equipment HMI

Smart TP is a highly functional teaching pendant exclusive to the RC9 controller. This can be used in various situations for setting robot operations and multiple parameters and as an equipment display device and control panel. The large 10.1-inch touch panel runs on Windows 10. Screens created by TwinCAT3 PLC HMI and programming screens created by TwinCAT3 PLC can be displayed. This teaching pendant has superior functionality, visibility, and operability compared to conventional types.

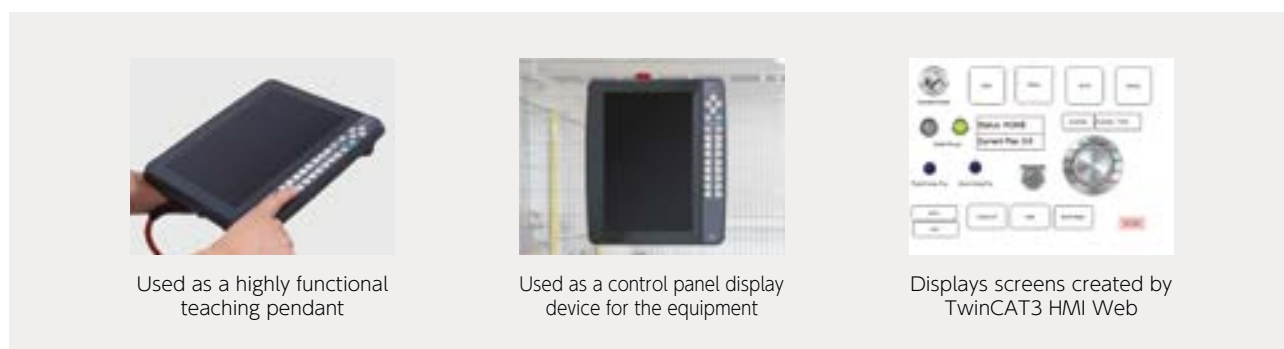

## ■ Additional axes controlled from robot controller



A drive unit or other parts can be controlled using the additional axis control function. Initial setup is easy using the auto gain tuning function. This makes it possible to control a robot's peripheral devices, for example a drive axis, servo hand, or tray changer, as an additional axis using the same interface as the robot.



The RC9 is a new concept in robot controllers that can be supplied as firmware. This approach allows us to supply robot systems that are optimized for individual customers.



## Specifications

Item		Specifications	
Applicable robots		VMB-2515/2518	VLA-4025/6022
Power supply	Power supply capacity	4.5kVA	10.0kVA
	Input voltage range	3 phase 200 V AC -10% to 230 V AC +10%	3 phase 400 V AC -10% to 480 V AC +10%
	Power supply frequency	47~63Hz	
Power cable length		10 m	
Number of control axes		6	
Control system		PTP, CP 3D line, 3D arc	
Language used		DENSO Robot Language (PacScript)	
Teaching system		1) Remote teaching 2) Numerical input (MDI)	
External signal	Digital I/O	System input: 8 pins / System output: 8 pins User input: 8 pins / user output: 8 pins	
	Hand I/O	User input: 12 pins / User output: 12 pins	User input: 6 pins / User output: 6 pins (included in the main unit connecting cable)
	Safety I/O	input: 6 pins / output: 8 pins	
External communication	Ethernet	Side of the robot controller: 1 line (GbE: Gigabit Ethernet)	
	USB	Side of the robot controller: 1 line Inside of the robot controller (Robot Control IPC): 3 lines	
Option extension		3 units(Two I/O terminals are regarded as one unit.)	
Self-diagnostic function		Overrun, servo error, memory error, input error, short circuit detection (user wiring section), etc.	
		External error output	
		Display the error code on the mini pendant (optional)	
Error indication		Display the error message and return method on the teaching pendant (optional)	
Environmental conditions (during operation)		Temperature: 0 to 40°C, Humidity: 20 to 90%RH (no condensation)	
Overvoltage category*1		III	
I/O power supply	Use an external power supply	Supply 24 V DC ±10% from external source	
	Use an internal power supply	Supply 24 V DC ±10% from inside controller	
SCCR		5kA	
Safety performance (Safety function)		PL d, Cat. 3	
Protection class		IP54	
Pollution degree		3	
Weight (transformer weight not included)		Approx. 93 kg	Approx. 104 kg
External dimensions*2		600(W) mm×582(L) mm×690(H) mm	600(W) mm×582(L) mm×840(H) mm
Applied standards		ISO 10218-1:2011, ISO 13849-1:2015, IEC 60204-1:2016/A1:2021, EN 61000-6-2:2005, EN 61000-6-4:2007/A1:2011, EN 61000-6-7:2015	

\*1: Compliant with IEC 60664-1. \*2: Installation stands included.


## Extended options list

EtherCAT cables		RJ45-RJ45, for fixed: 0.5, 2, 5, 10, 20, 40 m		Field network	PROFIBUS master terminal	
		RJ45-RJ45, for bending resistance:0.5, 2, 5, 10, 20, 40 m			PROFIBUS slave terminal	
Cables for EtherCAT box	Power cables	M8-Open, for movable: 2, 10, 40 m			DeviceNet master terminal	
		M8-M8, for movable: 0.5, 2, 5, 10, 20, 40 m			DeviceNet slave terminal	
		7/8"-Open, for bending resistance: 2, 10, 40 m			CC-Link slave terminal	
		7/8"-7/8", for bending resistance:0.5, 2, 5, 10, 20, 40 m				
		M8-RJ45, for bending resistance:0.5, 2, 5, 10, 20, 40 m				
	EtherCAT cables	M8-M8, for movable: 0.5, 2, 5, 10, 20, 40 m		Serial communication	RS232C 2ch terminal	
		M12-Open, Class A, for movable: 2, 10, 40 m			RS422/RS485 2ch terminal	
		Sensor cables for I/O Link	M12-M12, Class A, for movable: 0.5, 2, 5, 10, 20, 40 m		Digital input / output	Digital input terminal PNP, 8 points, 10 µs, IP20
			M12-Open, Class B, for bending resistance:2, 10, 40 m			Digital input terminal PNP, 16 points, 3 ms, IP20
M12-M12, Class B, for bending resistance:0.5, 2, 5, 10, 20, 40 m			Digital output terminal PNP, 8 points, 0.5 A, IP20			
Sensor cables for DIO		M8-Open, for movable: 2, 10, 40 m		Digital input terminal NPN, 8 points, 10 µs, IP20		
Expanded functionality (USB dongle license)		TwinCAT3 PLC				Digital output terminal NPN, 16 points, 0.5 A, IP20
		TwinCAT3 PLC + HMI Web				
Power supply		Power transformer (VMB) (assembly)		EtherCAT box	DIO, PNP, 16 points, 3 ms, IP67	
		Power transformer (VLA) (assembly)			DIO, NPN, 16 points, 3 ms, IP67	
		EtherCAT junction	3 port, 4 port , 8 port		IO Link master, Class A, IP67 4 port , 8 port	
		EtherCAT bridge terminal			IO Link master, Class B, IP67 4 port , 8 port	
		PROFINET RT controller terminal			Protective plug M8 for DIO (50 pcs set)	
Field network		PROFINET RT device terminal			Protective Plug M12 for IO Link (50 pcs set)	
		EtherNet/IP master terminal		Other	EtherCAT coupler + bus end cap set (assembly)	
		EtherNet/IP slave terminal			EtherCAT coupler terminal (standalone)	
					Bus end cap (standalone)	
					EtherCAT expansion terminal	
					Ethernet expansion module (assembly)	


\*EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

## Dimensional outline drawing


VMB-2515 / 2518

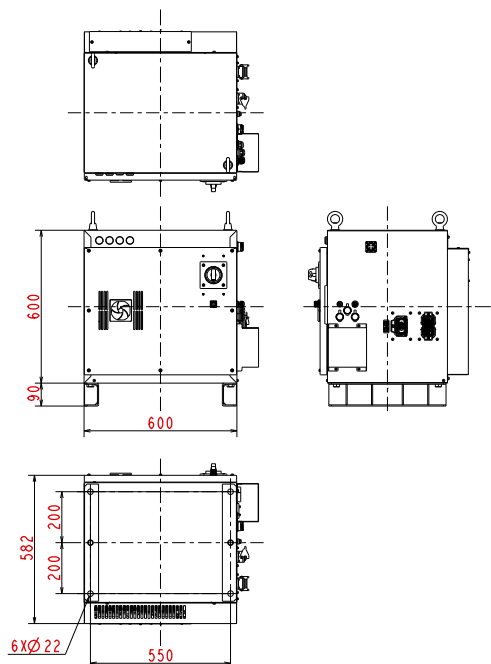


VLA-4025 / 6022

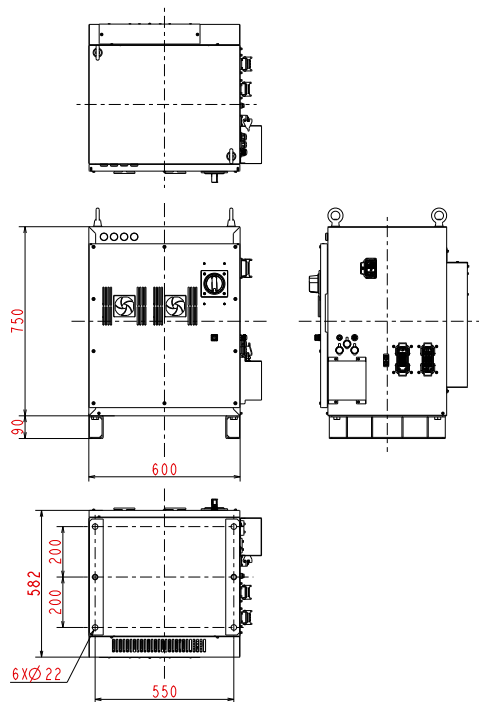

## Legend

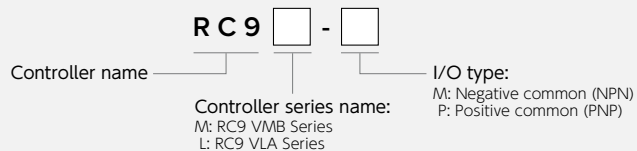

## System configuration diagram

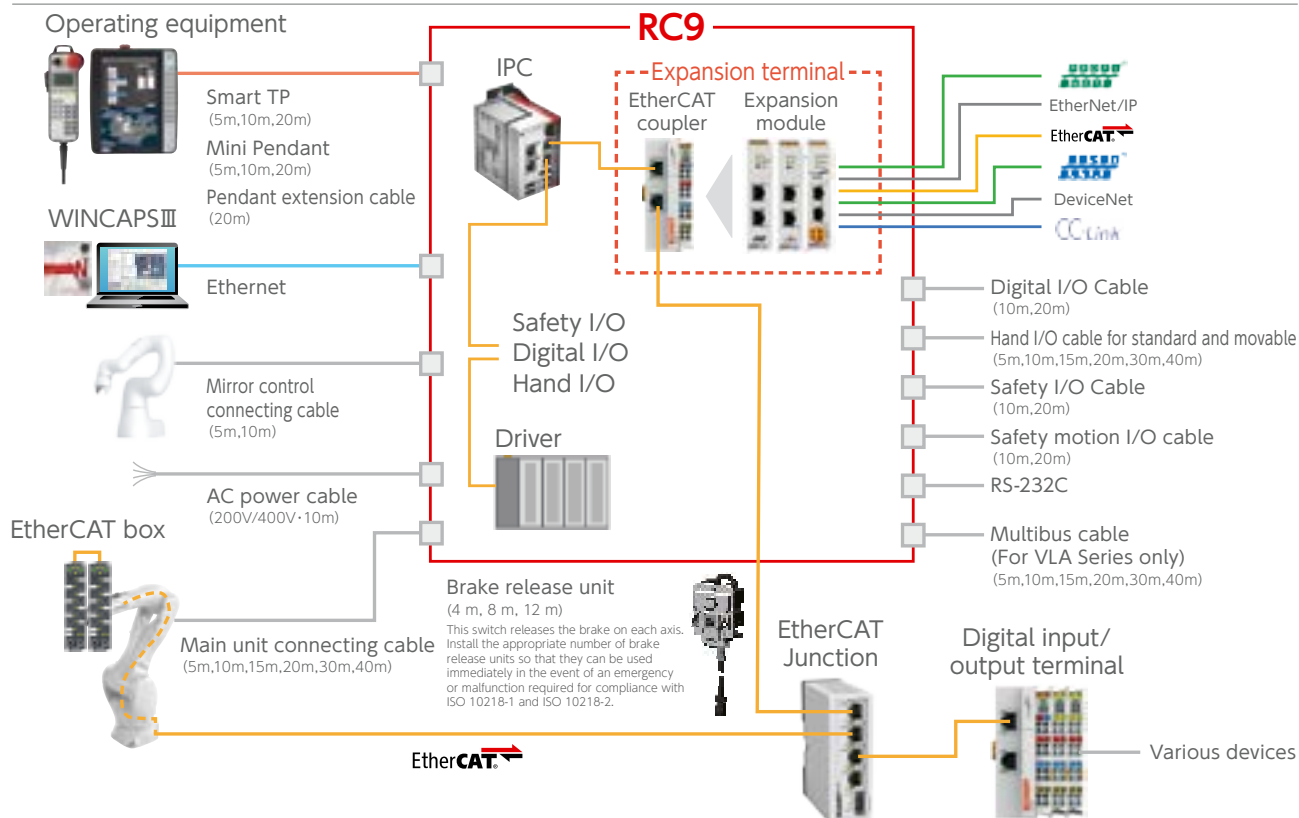

The CRC9 robot controller dedicated to the COBOTTA PRO enables integrated equipment control. This automates difficult manual work, such as assembly and inspection.

Standard type



Dust &amp; splash proof type (IP54)



## Specifications

Item		Specifications
Applicable robot		COBOTTA PRO 900 / COBOTTA PRO 1300
Power Source	Capacity	1.0 kVA
	Voltage range	Single-phase 200 VAC-15 % to 240 VAC+10 %
	Frequency	Single-phase 100 VAC-15 % to 120 VAC+10 % 47-63 Hz
AC power cable		Length:5 m Select a type from 5 types. ·Unsheathed type ·A Plug type for Japan ·A Plug type for North America ·SE Plug type for Europe ·O2 Plug type for China
Number of axes controlled		6
Language		PacScript (DENSO Robotics language) , Easy Block Programming (Optional)
Teaching method		Remote Teaching, Numeric input, Direct Teaching, Fine Direct Teaching (Optional)
I/O	Digital I/O	System input:8 pins / System output:9 or 10 pins User input:8 pins / User output:7 or 8 pins
	Safety I/O	User safety input:16 pins, User safety output:16 pins, External emergency stop input:2 pins, Enable auto input:2 pins Protective stop input:2 pins, Enabling switch output:2 pins, Pendant emergency stop output:2 pins, STO monitor output:2 pins
External communication	Ethernet	Front panel of the robot controller:2 lines (GbE:Gigabit Ethernet) (One line is used only for sending safety parameters.)
	EtherCAT	Front panel of the robot controller:1 line
	USB	Front panel of the robot controller:1 port, Inside of the robot controller (robot control IPC):2 ports
I/O power source	Using an external power source	Supplied with 24 VDC±10 % from an external power source.
	Using the internal power source	Supplied with 24 VDC±10 % from the robot controller.
Expand terminal (Optional)		3 units (Two I/O terminals are regarded as one unit.)
Self diagnosis function		Overrun, servo error, memory error, input error, short circuit detection (for I/O wiring), etc.
Error display		External error output, Displaying an error message and recovery method on Smart TP
Ambient temperature (During operation)		temperature:0 to 50 °C, humidity:20 to 90 %RH (No dew condensation allowed.)
Overvoltage category (IEC 60664-1)		II
Safety performance (Safety function)		PL d, Cat. 3
Applied standards		ISO 10218-1:2011, ISO 13849-1:2015, ISO/TS 15066:2016, IEC 60204-1:2016/A1:2021, EN 61000-6-2:2005, EN 61000-6-4:2007/A1:2011, EN 61000-6-7:2015

Item		Specifications
Degree of protection	IP20	IP54
Pollution degree (IEC 60664-1)	2 <sup>1</sup>	3
Weight	Approx. 15 kg	Approx. 18 kg
Outer dimensions	420(W)mm×360(D)mm×200(H)mm Screws included, rubber feet not included.	420(W)mm×461(D)mm×200(H)mm Screws included, rubber feet not included.


\*1: Pollution degree 2 environment is equivalent to home and office areas.

## Extended options list

AC power cable (5 m) *either one.	Unsheathed type		Field Network	DeviceNet master terminal	
	A Plug type for Japan			DeviceNet slave terminal	
	A Plug type for North America			CC-Link slave terminal	
	SE Plug type for Europe				
EtherCAT cable	O2 Plug type for China		Serial Commu- nicataion	RS232C 2ch terminal	
	RJ45-RJ45, fixed:0.5, 2, 5, 10, 20, 40 m			RS422/RS485 2ch terminal	
	RJ45-RJ45, flexible (non-torsion):0.5, 2, 5, 10, 20, 40 m			Digital input terminal PNP, 8ch, 10us, IP20	
	M8-Open, flexible:2, 10, 40 m			Digital input terminal PNP, 16ch, 3ms, IP20	
Cable for EtherCAT box	Power cable	M8-M8, flexible:0.5, 2, 5, 10, 20, 40 m	Digital input/ output	Digital output terminal PNP, 8ch, 0.5A, IP20	
		7/8"-Open, flexible(non-torsion):2, 10, 40 m		Digital output terminal PNP, 16ch, 0.5A, IP20	
		7/8"-7/8", flexible (non-torsion):0.5, 2, 5, 10, 20, 40 m		Digital input terminal NPN, 8ch, 10us, IP20	
		M8-RJ45, flexible (non-torsion):0.5, 2, 5, 10, 20, 40 m		Digital input terminal NPN, 16ch, 3ms, IP20	
		M8-M8, flexible:0.5, 2, 5, 10, 20, 40 m		Digital output terminal NPN, 8ch, 0.5A, IP20	
	EtherCAT cable	M12-Open, Class A, flexible:2, 10, 40 m	EtherCAT box	Digital output terminal NPN, 16ch, 0.5A, IP20	
		M12-M12, Class A, flexible:0.5, 2, 5, 10, 20, 40 m		DIO, PNP, 16ch, 3ms, IP67	
		M12-Open, Class B, flexible(non-torsion):2, 10, 40 m		DIO, NPN, 16ch, 3ms, IP67	
		M12-M12, Class B, flexible (non-torsion):0.5, 2, 5, 10, 20, 40 m		IO-Link master, ClassA, IP67	
	Sensor cable for IO-Link	M8-Open, flexible:2, 10, 40 m		4 ports, 8 ports	
				4 ports, 8 ports	
Extension Function (USB dongle / License certificate)	M8-Open, flexible:2, 10, 40 m		Other	Protection plugs M8, 50pcs for DIO	
	TwinCAT3 PLC			Protection plugs M12, 50pcs for IO-Link	
Field Network	TwinCAT3 PLC + HMI Web		Other	EtherCAT coupler terminal + Bus end cap set (Built-in)	
	EtherCAT junction 3 ports, 4 ports, 8 ports			EtherCAT coupler terminal (Single)	
	EtherCAT bridge terminal			Bus end cap (Singile)	
	PROFINET RT controller terminal			EtherCAT extension terminal	
	PROFINET RT device terminal			Ethernet expansion module (Built-in)	
	EtherNet/IP master terminal				
	EtherNet/IP slave terminal				
	PROFIBUS master terminal				
	PROFIBUS slave terminal				

\*EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.


## Dimensional outline drawing

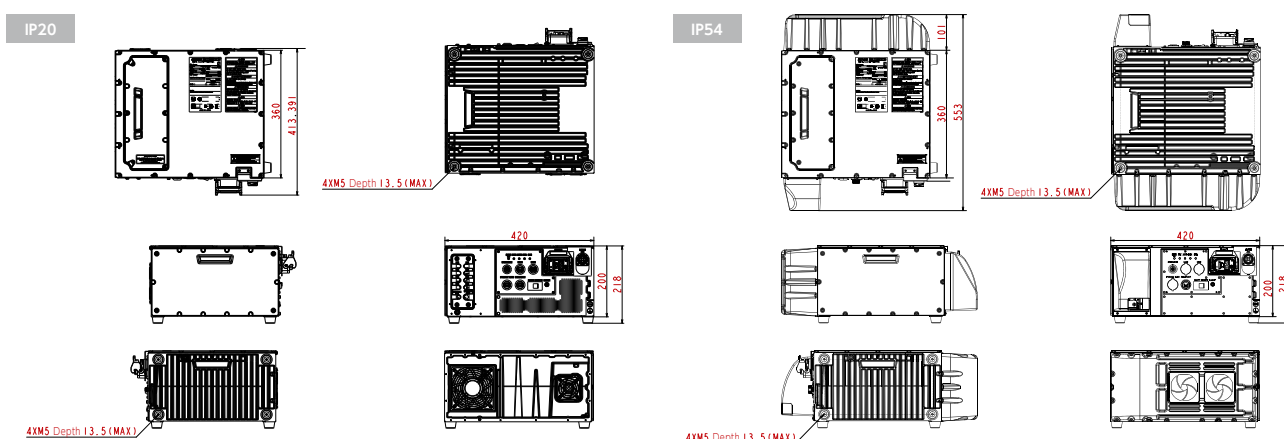


[Notes] This product is an industrial robot capable of operating in collaboration with human beings. Before using the product, be sure to conduct risk assessment in accordance with the applicable laws, regulations, notices, guidance, JIS B 9700:2013 (ISO 12100:2010), etc., and reduce risk appropriately.

\* The product appearance and specifications are subject to change without notice due to improvements.

## Legend

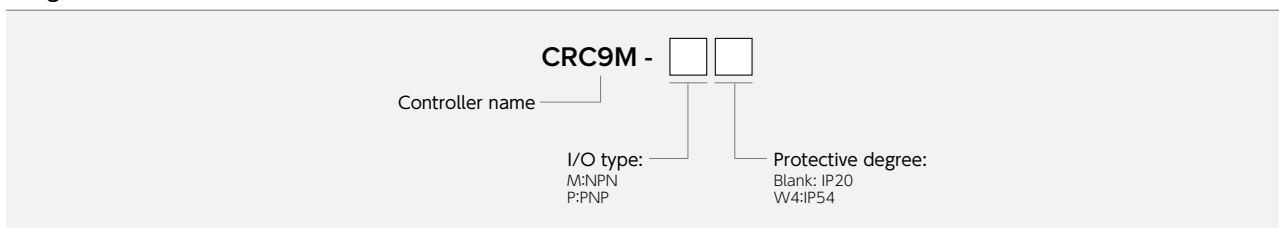

## System configuration diagram

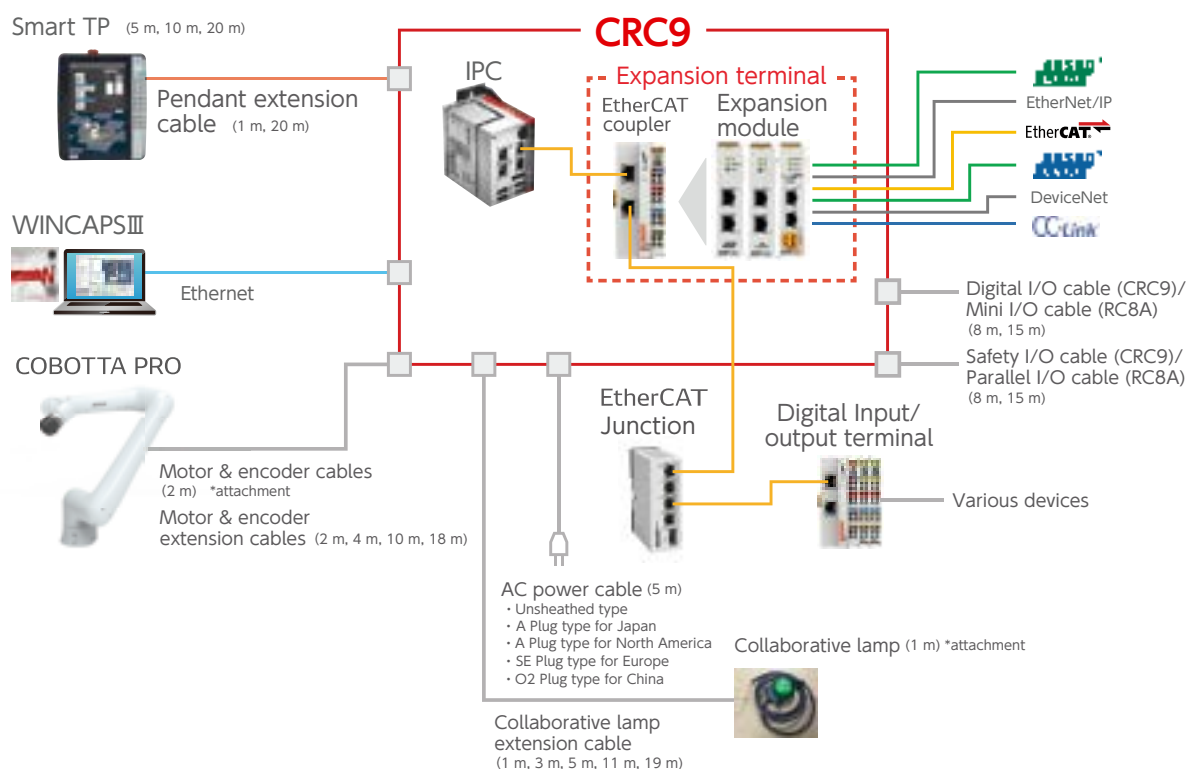

## Safety Motion Function

\*Planned for release in 2024

Enables common use of the motion area while achieving both safety and high productivity.



### 1 Motion range monitoring

Uses the safety virtual fence function to monitor that the robot does not move outside the set motion range.

#### ■ Benefits

- Enables installation of minimum required safety fence for compact equipment design
- Enables installation of common work areas for workers and robots using sensors\*

### 2 Speed monitoring

Uses the monitored-speed function to monitor that the robot does not exceed the set operating speed.

#### ■ Benefits

- Reduces the speed to a safe level when a sensor\* detects an approaching worker

### 3 Robot Stop monitoring



Uses the Robot Stop monitoring function to monitor that the robot remains stationary after having stopped with its motor ON.

#### ■ Benefits

- Robot stops with the motor ON when a sensor\* detects the entry and presence of an operator inside the stop area
- Enables fast restarting of the program by maintaining the standstill status

\*Additional safety measures, such as installing sensors, may be required following a risk assessment.

#### ■ Features

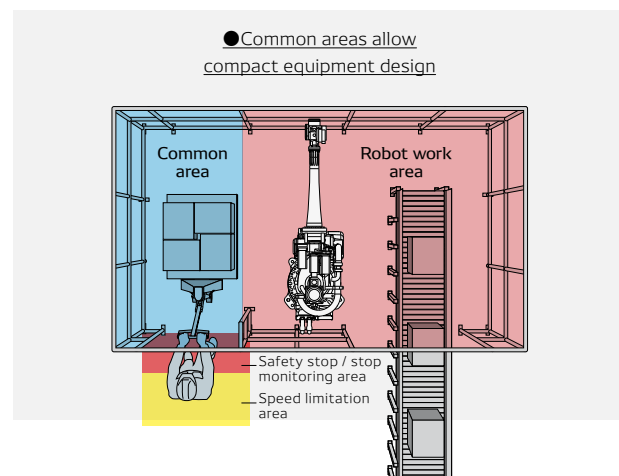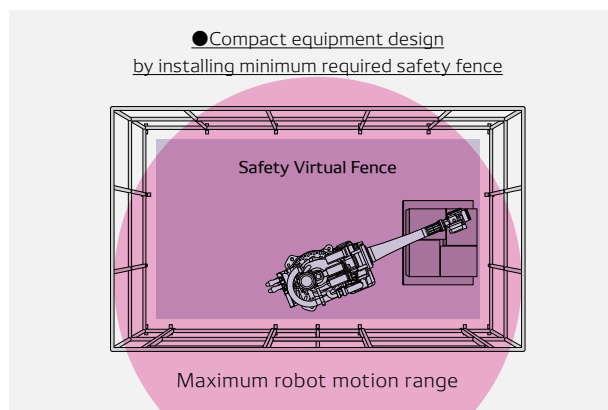

#### ■ Safety features

Name	Description
Emergency Stop Function	Decelerates the robot until it stops, and then turns OFF the motor. The current program will be Reset-Stopped.
Protective Stop Function	This function is to be connected to a signal from a safeguard or the like installed in the robot system/cell and stop the robot in response to the input signal.
Monitored-Speed Function	Monitors the robot speed to confirm if it does not exceed the specified speed.

Name	Description
Axis Limiting Function	Monitors the robot axes to confirm if they are not out of the specified motion range.
Monitored Standstill Function	Monitors the robot to confirm if it remains stationary after having stopped with its motor ON.
Safety Virtual Fence Function	Monitors the robot to confirm if it does not go beyond the specified motion range.

## State-of-the-art DENSIO robot controller supporting the global standard specifications

### ■ Compact size

A small, lightweight high-performance 8-axis controller that offers a high degree of freedom in installation to save space

Robot controller	Specifications	Size (mm)	Weight (kg)
RC8A	Standard / Safety I/O-less	356.5 × 319.6 × 96.8	Approx. 10



### ■ Exceptional usability

Improved GUI increases work efficiency

Easier-to-view menu configuration and more user-friendly operability are realized. Improved GUI and functionality help reduce time spent on robot deployment.



### ■ Compliance with global standards

#### Open Network


**ORin2** (ISO 20242-4 compliant)

Open Resource Interface for the Network Version 2



#### Standards / Certification

- ISO 10218-1:2011 / CE (Standard specification, Safety motion specification, UL specification)
- UL (UL specification)
- PL<sub>e</sub> / SIL3 (Standard specification, UL specification)
- PL<sub>d</sub> / SIL2 (Safety motion specification)
- KCs (Standard specification, Safety motion specification)



\* Please feel free to contact DENSIO Robotics for details of the acquisition of certification.

#### Field Network

Supporting a wide range of network standards used in the FA field.

### ■ Safety motion function

Safety function that allows humans and robots to work in a shared area

Supported controller RC8A

#### Safety features

Name	Description	Name	Description
STO (Safe Torque Off)	Function for immediate shutdown of the motor power	RSM (Robot Speed Monitoring)	Function to monitor the robot's specified sections do not exceed the specified speed.
SS1 (Safe Stop 1)	Function to shut down the motor power after slowing down and stopping the robot	RPM (Robot Position Monitoring)	Function to monitor the robot's specified sections do not exceed the specified motion area
SS2 (Safe Stop 2)	Function to leave the motor power on after slowing down and stopping the robot	SBC (Safe Brake Control)	Function to turn off the external brake power and lock the brake
SOS (Safe Operating Stop)	Function to monitor the robot does not move from the stop position		
SLP (Safely-Limited Position)	Function to monitor the axes do not exceed the soft limit		


\*Equipment must be used only after performing risk assessment, implementing safety measures, and checking that hazard to humans is thoroughly prevented.



When entry of a human into the set motion area is detected by devices such as laser scanners, the robot speed is limited to the specified safe speed or less to enable continuous production. The robot stops moving when the human enters the stop area.

### ■ Wide expandability

Many devices can be custom controlled and connected to meet a wide range of needs.

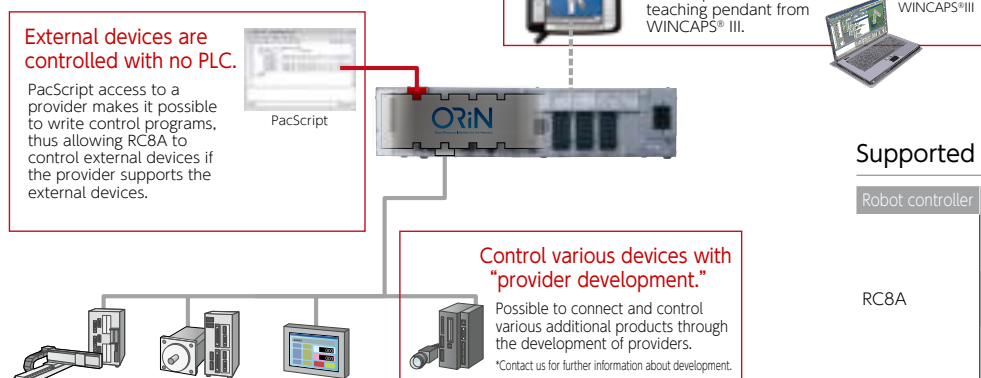

#### Supported Controllers

Robot controller	Specifications	Robot
RC8A	Standard	VP, VS, VM, HSR®, HS-A1, HM, XR, SC
	Safety I/O-less	VP, VS, VM, HM, XR, SC, HSR®, HS-A1
	Safety motion	VP, VS, VM, HSR®, HS-A1, HM, XR, SC



## Specifications

Item			Specifications								
Applicable robots			VP -5243/6242 *1	VS 050/060/ 050 (pharmaceu- tical / medical)	VS 068/087	VS -6556/6577	VM -6083/60B1	HSR® 048/055/065	HS 035A1/045A1 /055A1	HM -4*****	XR -43***
Power supply	Power supply capacity		1.00 kVA (*1)	1.15 kVA	2.78 kVA	1.80 kVA	3.30 kVA	1.80 kVA	1.80 kVA	2.45 kVA	1.85 kVA
	Input voltage range		Three-phase 200 V AC −15% to 240 V AC +10% (100 V specification also available for the VP series.)								
			Single-phase, 230 V AC −10% to 240 V AC +10% *1			—		Single-phase, 230 V AC −10% to 240 V AC +10%			
Power supply frequency			50Hz / 60Hz								
Power cable length			5 m								
Controllable axes			5 / 6	6				4			
Control method			PTP, CP 3-dimensional linear, 3-dimensional arc (PTP control only for extended-joint support)								
Drive method			All axes all digital AC servo								
Language used			DENSIO Robotics language (PacScript)								
Memory capacity			User area Variable area: 1.75 MB (32,766 points equivalent), file area: 400 MB (5,000 steps × 256 files)								
Teaching system			1) Remote teaching 2) Numerical entry (MDI) 3) Direct teaching (HS series, HM series HSR series)								
External signals (I/O, etc.)	Mini I/O	Standard specification, safety motion specification	Input: User open 8 points + system fix 14 points / Output: User open 8 points + system fix 18 points								
		Safety I/O-less specification	Input: User open 8 points + system fix 13 points / Output: User open 8 points + system fix 14 points								
	Hand I/O		Input: User open 8 points / Output: User open 8 points								
	Motion I/O (option)		Input: 30 safety circuit signals / Output: 14 safety circuit signals								
	Parallel I/O board for expansion (option)		Expansion slot: PCI Input: 40 points / Output: 48 points								
	CC-Link remote device board (option)		Expansion slot: PCI Express		Input: max. 8,192 points / Output: max. 8,192 points, Remote register		Input: max. 2,048 words / Output: 2,048 words *2				
	DeviceNet slave board (option)		Expansion slot: PCI Express		Input: max. 256 points / Output: max. 256 points						
	DeviceNet master board (option)		Expansion slot: PCI Express		Input: 1,024 points / Output: 1,024 points						
	EtherNet / IP adapter board (option)		Expansion slot: PCI Express		Input: max. 4,032 points / Output: max. 4,032 points						
	PROFIBUS slave board (option)		Expansion slot: PCI Express		Input: max. 256 points / Output: max. 256 points						
PROFINET I/O device board (option)		Expansion slot: PCI Express		Input: max. 8,192 points / Output: max. 8,192 points							
EtherCAT slave board (option)		Expansion slot: PCI Express		Input: max. 2,048 points / Output: max. 2,048 points							
External communication			RS-232C: 1 line, EtherNet: 1 line (GbE: Gigabit EtherNet), USB: 2 lines, VGA: 1 line (option)								
Expansion slot			· PCI: 1 slot · PCI Express: 1 slot								
External-diagnosis function			Overrun, servo error, memory error, input error, short circuit detection (user wiring part), etc.								
Environmental conditions (during operation)			Temperature: 0 to 40°C / Humidity: 20 to 90%RH (no condensation allowed)								
Safety performance			See "Options" below.								
Protection grade			IP20								
Weight			Safety I/O-less specification, Standard specification: Approx. 10 kg, Safety motion specification: Approx. 11 kg *3								

\*1: Power for the 100 V AC specification is "Single-phase 100 V AC -5% to 110 V AC +10% 50/60 Hz, 1 kVA."

\*2: For Ver. 2.00 \*3: Does not include the supplied cables.

\*4: Specifications must be designated when placing an order. Specifications cannot be changed after shipment. Extended-joint support specifications are available for all controllers.

## Options \*4

Controller type	Safety performance	Standard	I/O type
Standard	Safety I/O: PL e/Cat.4, SIL3	CE, KCs	NPN /PNP
Safety motion	Safety I/O: PL e/Cat.4, SIL3 Safety motion: PL d/Cat.3, SIL2	CE, KCs	
Safety I/O-less	—	—	
UL standard (Safety I/O) *5	Safety I/O: PL e/Cat.4, SIL3	CE, UL	
UL safety motion *5	Safety I/O: PL e/Cat.4, SIL3 Safety motion: PL d/Cat.3, SIL2	CE, UL	


\*5: The UL specification is also required for the robot unit. In addition, a pendant, mini-pendant or emergency stop button box is required. Please note that for VS-050 / 060 / 068 / 087, a brake release unit is required.

Compliant robot safety standards:  
ISO 10218-1: 2011, ANSI/RIA R15.06-1999  
UL standards UL1740, CSA Z434, etc.


## Legend

<b>RC8A</b> - <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> - <b>NN</b> <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> - <span style="border: 1px solid black; padding: 0 5px;"> </span> <span style="border: 1px solid black; padding: 0 5px;"> </span> - <b>NNN</b>			
Controller name			
Robot type format:		CPU:	
VPA0: VP-5243 / 6242		E: Standard	
VSA3: VS050 / 060 / 050 (pharmaceutical / medical)		C: High-spec	
VSA4: VS068 / 087		I/O type:	
VSA0: VS-6556 / 6577		M: Negative common (NPN)	
VMA0: VM series		P: Positive common (PNP)	
HSB1: HSR series			
HSA1: HS-A1 series			
HMA0: HM series			
LHA1: LPH series			
XRA0: XR series			
S1A1: SC series (2-axis)			
S2A1: SC series (3-axis, 4-axis)			
Compliant standard:			
NN: Safety-I/O-less specification (safety-I/O-less)			
NI: Standard specification (safety I/O)			
NM: Safety motion specification (safety I/O, safety motion)			
UL: UL specification *5 (safety I/O)			
UM: UL specification *5 (safety I/O, safety motion)			


Standard specification / Safety I/O-less specification

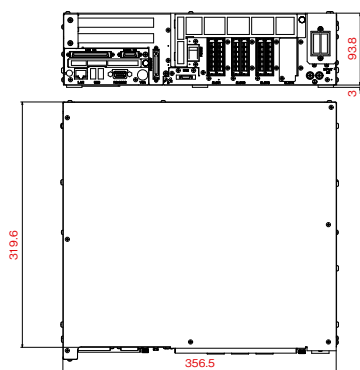

Safety motion specification

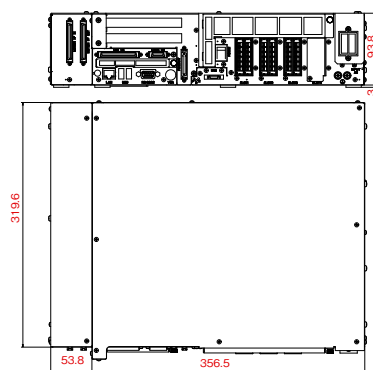


Standard UL specification / Safety motion UL specification

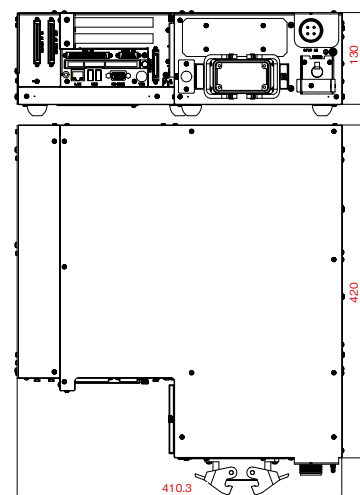


Options


RC8 controller protective box light




I/O conversion box (RC5 → RC8/8A Safety I/O-less specification)



User interface

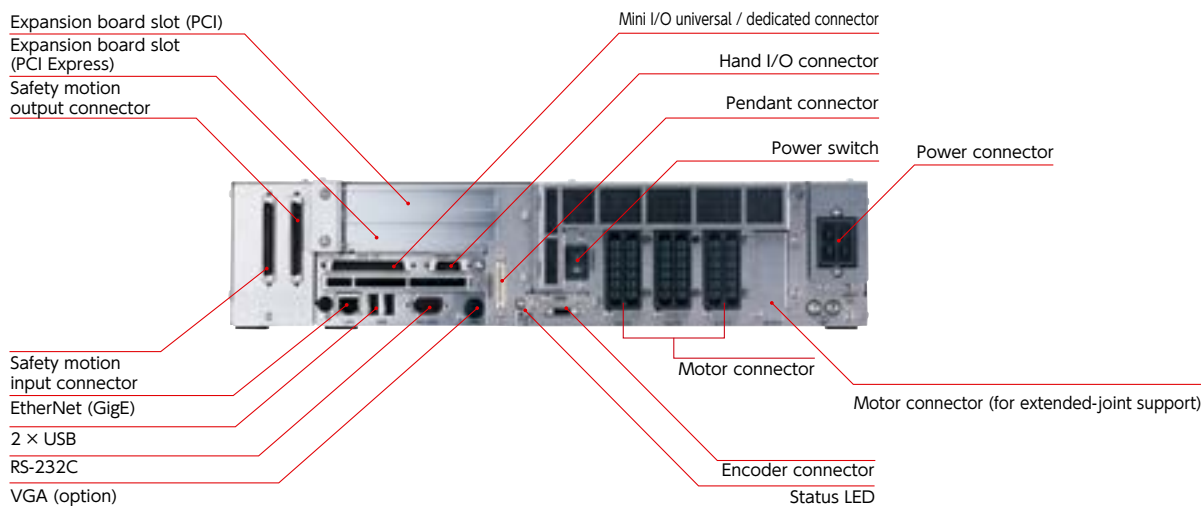

System configuration diagram

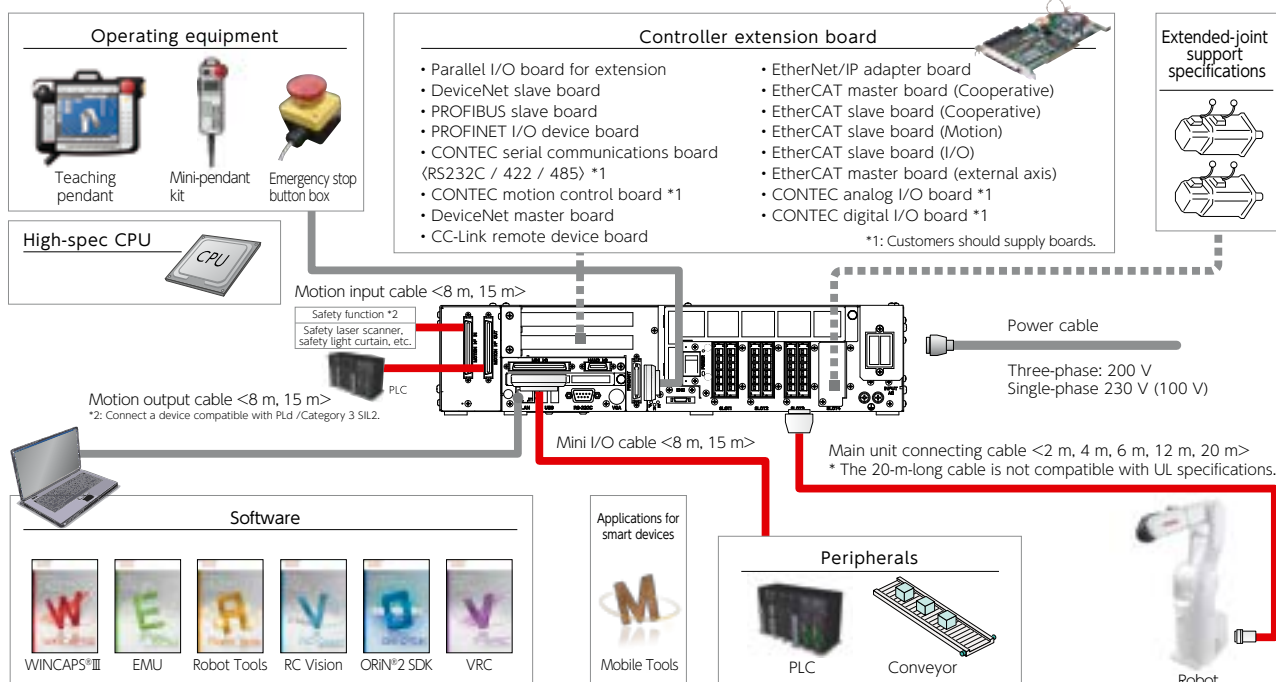

# MC8A

Motion controller suited to developing custom robots based on the RC8A robot controller.



## Specifications

Item		Specifications
Power supply	Power supply capacity	3 kVA
	Input voltage range	Three-phase 200 V AC $-15\%$ to 240 V AC $+10\%$
	Power supply frequency	50Hz / 60Hz
Power cable length		5 m
Controllable axes		8 max.
Control method		PTP, CP 3-dimensional linear, 3-dimensional arc <sup>*1</sup>
Drive method		All axes all digital AC servo
Language used		DENSO Robotics language (PacScript)
Memory capacity		User area Variable area: 1.75 MB (32,766 points equivalent), file area: 400 MB (5,000 steps $\times$ 256 files)
Teaching system		1) Remote teaching 2) Numerical entry (MDI)
External signals (I/O, etc.)	Mini I/O	Standard specification, safety motion specification Input: User open 8 points + system fix 14 points / Output: User open 8 points + system fix 17 points <sup>*2</sup>
	Hand I/O	Safety I/O-less specification Input: User open 8 points + system fix 13 points / Output: User open 8 points + system fix 14 points
	Motion I/O (option)	Input: User open 8 points / Output: User open 8 points
	Parallel I/O board for expansion (option)	Input: 30 safety circuit signals / Output: 14 safety circuit signals
	CC-Link remote device board (option)	Expansion slot: PCI Input: 40 points / Output: 48 points
	DeviceNet slave board (option)	Expansion slot: PCI Express Input: max. 8,192 points / Output: max. 8,192 points
	DeviceNet master board (option)	Remote register Input: max. 2,048 words / Output: 2,048 words
	EtherNet / IP adapter board (option)	Expansion slot: PCI Express Input: max. 256 points / Output: max. 256 points
	PROFIBUS slave board (option)	Expansion slot: PCI Express Input: max. 1,024 points / Output: 1,024 points
	PROFINET I/O device board (option)	Expansion slot: PCI Express Input: max. 4,032 points / Output: max. 4,032 points
External communication	PROFIBUS slave board (option)	Expansion slot: PCI Express Input: max. 256 points / Output: max. 256 points
	PROFINET I/O device board (option)	Expansion slot: PCI Express Input: max. 8,192 points / Output: max. 8,192 points
Expansion slot	EtherCAT slave board (option)	Expansion slot: PCI Express Input: max. 2,048 points / Output: max. 2,048 points
		RS-232C: 1 line, EtherNet: 1 line (GbE: Gigabit EtherNet), USB: 2 lines, VGA: 1 line (option)
Expansion slot		· PCI: 1 slot · PCI Express: 1 slot
External-diagnosis function		Overrun, servo error, memory error, input error, short circuit detection (user wiring part), etc.
Environmental conditions (during operation)		Temperature: 0 to 40°C / Humidity: 90%RH or less (no condensation allowed)
Safety performance		See "Options" below.
Protection grade		IP20
Weight		MC8A: Standard specification: Approx. 10 kg, Safety motion specification: Approx. 11 kg <sup>*3</sup>

\*1: CP 3-dimensional linear, 3-dimensional arc only possible with orthogonal robots (XY configuration).

\*2: If the built-in safety I/O is not necessary for the standard specification, please specify a safety-I/O-less specification. \*3: Does not include the supplied cables.

## MC8A Options

Controller type	Safety performance	Standard	I/O type
Standard	Safety I/O: PL e/Cat.4, SIL3	CE	NPN/PNP
Safety motion	Safety I/O: PL e/Cat.4, SIL3 Safety motion: PL d/Cat.3, SIL2	CE	
UL standard (Safety I/O)	Safety I/O: PL e/Cat.4, SIL3	CE, UL	
UL safety motion	Safety I/O: PL e/Cat.4, SIL3 Safety motion: PL d/Cat.3, SIL2	CE, UL	

## Motor list

Motor capacity	With/Without brake	With/Without oil seal	Flange aperture dimensions
30 W	With / Without	With / Without	□40 mm
50 W	With / Without	With / Without	□40 mm
100 W	With / Without	With / Without	□60 mm / □40 mm
200 W	With / Without	With / Without	□60 mm
400 W	With / Without	With / Without	□80 mm / □60 mm
750 W	With / Without	With / Without	□100 mm / □80 mm
1,000 W	With / Without	With / Without	□100 mm

## Driver units

Part Name
Driver units (L / S)
Driver units (L / SS)
Driver units (S / S)
Driver units (S / SS)
Driver units (SS / SS)

## Supported driver units

Driver unit single axis size	Supported motors
SS	30 W / 50 W / 100 W
S	200 W / 400 W
L	750 W / 1,000 W

<Selection example> <sup>\*4</sup>

- 750 W motor  $\times$  1, 400 W motor  $\times$  1 = Select L/S
- 400 W motor  $\times$  1 = Select S/SS
- 100 W motor  $\times$  2 = Select SS/SS

\*4: Please inform a sales rep of the motor type to be used and the corresponding axis number to allow us to suggest the best driver unit configuration for you.

## Legend

RC8A - MC81 - NN <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> - NNN			
CPU: _____	I/O type: _____	Compliant standard: _____	
E: Standard	M: Negative common (NPN)	NI: Standard specification (safety I/O)	
7: High-spec	P: Positive common (PNP)	NM: Safety motion specification (safety I/O, safety motion) <sup>*1</sup>	
		NN: Safety-I/O-less specification (safety-I/O-less) <sup>*2</sup>	
		UL: UL standard specification (safety I/O)	
		UM: UL safety motion specification (safety I/O, safety motion) <sup>*2</sup>	
<sup>*1</sup> : Safety motion specifications are available for selection for MC8A. <sup>*2</sup> : Safety I/O-less specifications are available for selection for MC8.			

## Supports the development of custom robots

Allows for designing robots for any stage of production based on the customer's goals, conditions, and environment.



Orthogonal robot



Cylindrical coordinate robot



Tabletop robot



SCARA robot



Parallel-link robot



5- and 6-axis robot

## Exceptional usability

Uses a RC8A interface specially adapted to robot control

### Shorten startup time

- Use of the same off-line software and teaching pendant as for all current DENSO Robotics products let customers continue to use controls they're familiar with, reducing the number of work-hours necessary in order to use the robot.
- Reduces worktime in the design of emergency stops, etc. by making use of the MC8A's safety circuits
- Provides ease of use by allowing gain tuning and other adjustments to be performed using MC8 functionality.

## Maximum 8-axis control + wide expandability

Utilizes an RC8A provider to directly control various FA devices

### Improving efficiency by integrating control

- Using ORIN allows usage of the RC8A provider functions. This makes integration of various FA devices much simpler. It also allows for control of any application in a standard program language and reduces programming and maintenance man-hours.
- Uses the same GUI as the RC8A providing greater efficiency.

## World-class safety

Complies with the same global safety standards as the RC8A.



### Standards / certification

- CE (standard specification, safety motion specification, UL specification)
- PL<sub>e</sub>/SIL3 (standard specification)
- UL (UL specification)
- KC (MC standard specification)

## External dimensions

Unit: mm


### MC8A

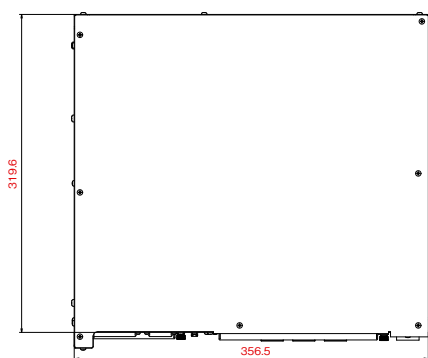

\*For safety motion, standard UL and safety motion UL specifications, see external dimensions on P.43.

## System configuration diagram

Maximum power supply capacity: 3 kW in total Maximum controllable axes: 8

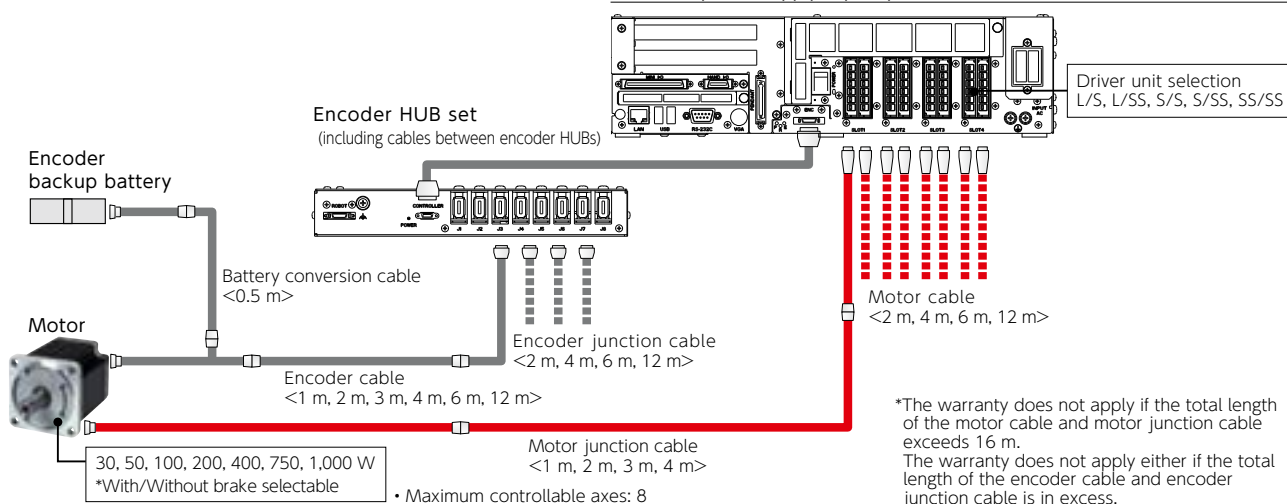

Smart TP is a high performance teaching pendant that can be used in a variety of situations, such as configuring robot settings, teaching, and serving as an HMI.



### Applications

#### ■ As a teaching pendant

Smart TP is equipped with a teaching function that allows each axis of the robot to be adjusted.



#### ■ As an HMI

It can be used as an indicator not only for robots but for the entire facility.



### Features

#### ■ Embedded with the large touch panel

Smart TP runs on Windows 10 and features a large 10.1" screen for improved operability.

#### ■ Splashproof with IP54 protection rating

#### ■ Improved GUI for increased efficiency

Easy-to-view menu configuration and user-friendly operability are realized. With improved GUI or functions, simulation of robot introduction can be checked on the pendant and work time can be reduced.

### Functions

#### ■ RC8A compatible UI

Compatible with the existing RC8A controller, maintaining the legacy development environment and ensuring operability.

#### ■ WINCAPS Plus UI

Compatible with the GUI of "WINCAPS Plus," an Offline Programming Software group.

#### ■ Customizable control panel screen

Screens created by TwinCAT3 HMI Web can be displayed.

### Specifications

Item	Specifications
Size	10.1" (16:10)
Resolution	WXGA 800×1,280 pixels
Touch screen	Transmissive capacitance type
Backlight	LED
Dimensions (L x W x H)	215 × 284 × 69 mm
Weight	Approx. 1,120 g

## PERIPHERALS

# Teaching pendant / Mini pendant

These are input and operation devices for teaching, program creation or startup. Use in combination with WINCAPS®III enables efficient programming and teaching.

Teaching pendant



Mini-pendant



### Features

#### ■ Embedded with the large touch panel

A 7.5-type TFT is embedded to realize simple visual check and operation with color display and touch panel.

#### ■ Improved GUI for increased efficiency

Easy-to-view menu configuration and user-friendly operability are realized. With improved GUI or functions, simulation of robot introduction can be checked on the pendant and work time can be reduced.

#### ■ The screen can be customized using control panel functions.

The teaching pendant screen can be customized as a control panel of robot and peripheral devices.

#### ■ Protection grade

Splash proof equivalent to IP65

#### ■ Mounted with an enable switch

The pendant is mounted with a 3-position enable switch.

### Specifications

Item	Multifunction teach pendant	Mini-pendant *1
Power supply	24 V DC (Supplied from the controller)	
LCD	Liquid crystal display with back light, 7.5-type TFT color LCD, multi-function 640×480 pixels	Liquid crystal display: 128 x 64 pixels
Emergency stop button	4B contact, 4-circuit output (Forced-separation type)	
Dead man's switch (Enable switch)	3-position-type (OFF-ON-OFF), 2-circuit output	
Mode-switching switch	3-position switching with keys(AUTO, MANUAL, TEACHCHECK) Note: Mode is switchable only when using the pendant with keys	
Mounting conditions	Temperature: 0 to 40° C, Humidity: 90% RH or less (no condensation allowed)	
Protection grade	IP65	
Weight	1.6 kg or less (Not including the cable)   Approx. 0.3 kg (Not including the connection cable)(Note)	
Cable length	4 m, 8 m, 12 m	

\*1: The mini-pendant itself cannot create or edit programs. Program creation and editing are performed using the WINCAPS®III Light, a mini-pendant accessory. The maintenance functions below are also furnished.  
(1) CALSET operation (2) Motor encoder reset (3) Setting of the calendar and clock built in the robot controller (4) Setting of the date for next battery replacement (5) Brake release and operation

Simply fit this jacket over a standard-specification robot. to easily and inexpensively automate food manufacturing processes that require cleaning.

Supported robots	VS068 / VS087
Supported controllers	RC8A

\*Standard flange specification only



## Features

### ■ Easily fitted to implement low-cost automation of food manufacturing processes

To fit the jacket, simply place it over the robot and tie the drawstrings to hold it in place. Then remove from the robot for cleaning as necessary. Alternatively, the jacket can be secured to a pedestal with a dedicated plate\*. It can also be cleaned while fitted to the robot by spraying with water or wiping with a moist cloth.

\*Dedicated plate should be supplied by customers.



### ■ Compatible with chemicals used in food manufacturing processing

The jacket is resistant to a variety of chemicals, ensuring that it will remain clean and sanitary at all times.

**Chemicals to which the jacket is resistant**

- Sodium hypochlorite aqueous solution (alkaline)
- Sodium hypochlorite pH conditioning liquid (weakly acidic)
- Alcohol
- Hot water (40° C to 100° C)

### ■ Stow wiring by using the dedicated mounting flange

Since cables can be routed from inside the robot protective jacket for food processing through holes in the mounting flange, robot hand cables can be stowed inside the jacket.

Wiring hole



## Specifications

Specifications		Unit	VS068		VS087	
			Standard specification	Robot fitted with jacket	Standard specification	Robot fitted with jacket
Total arm length (Including No. 1 arm, No. 2 arm and the distance to arm end)		mm	760 (340+340+80)	830 (340+340+150) (Including mounting flange weight)	955 (445+430+80)	1025 (445+430+150) (Including mounting flange weight)
Motion range *2	J1-axis	°	±170	±120*1	±170	±120*1
	J2-axis		+135 to -100	+90 to -70*1	+135 to -100	+90 to -70*1
	J3-axis		+153 to -120	+140 to -20*1	+153 to -136	+140 to -20*1
	J4-axis		±270	±90*1	±270	±90*1
	J5-axis		±120	+110 to -100*1	±120	+110 to -100*1
	J6-axis		±360	±240*1	±360	±240*1
Maximum payload		kg	7	6 (Excluding mounting flange weight)	7	6 (Excluding mounting flange weight)
Operating temperature range		°C	0 to 40	0 to 40*3	0 to 40	0 to 40*3
Maximum allowable moment of inertia	J4-axis, J5-axis	kgm2	0.45	0.44 (Excluding mounting flange weight)	0.45	0.44 (Excluding mounting flange weight)
Maximum allowable moment	J4-axis, J5-axis	Nm	16.2	14.4 (Excluding mounting flange weight)	16.2	14.4 (Excluding mounting flange weight)
	J6-axis		6.86	6.69 (Excluding mounting flange weight)	6.86	6.69 (Excluding mounting flange weight)
Signal line and air pipe solenoid valves *5		—	7 systems (#4 × 6, #6 × 1) (Solenoid valves can be selected from 1 to 3) 1.3 × solenoid valves (2-position, double solenoid) 2.3 × solenoid valves (3-position, exhaust center solenoid) 3.3 × solenoid valves (3-position, closed center solenoid)	Signal lines: CN21 10 (No single wires allowed, 1 cable with coating outer diameter of 6.5 to 8 mm) Air pipes: 6 max. *4	7 systems (#4 × 6, #6 × 1) (Solenoid valves can be selected from 1 to 3) 1.3 × solenoid valves (2-position, double solenoid) 2.3 × solenoid valves (3-position, exhaust center solenoid) 3.3 × solenoid valves (3-position, closed center solenoid)	Signal lines: CN21 10 (No single wires allowed, 1 cable with coating outer diameter of 6.5 to 8 mm) Air pipes: 6 max. *4
Installation orientation		—	Floor-standing, wall-mounted, ceiling	Floor only	Floor-standing, wall-mounted, ceiling	Floor only
Weight		kg	49	50 (Including mounting flange weight)	51	52 (Including mounting flange weight)

\*1: Movable range includes composite movements by all axes. The standard specification movable range applies to single-axis movements.

\*2: Depends on the movable range of customer robot. Customer to configure software limits.

\*3: Addition of a jacket may cause the robot to heat up more readily than previously. \*4: A maximum of six signal lines and air pipes may be routed outside the robot jacket. \*5: Standard type, protected type

# DRH Series Electric Hand

## High-Accuracy Manipulator

A simple add-on to a DENSO robot for high-accuracy gripping and position control.  
All-in-one teaching is also provided.



\*For details, see our website.




## Features

### Intelligent handling (fast cycle times, improved quality)

#### Compatible with many part numbers

Multi-point position movement

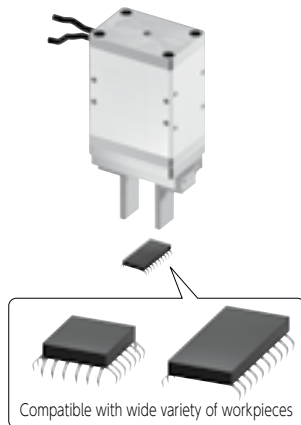


#### Dimension check

Dimension measurement function  
(workpiece dimension measurement  $\pm 0.05$  mm)




#### Deformation prevention

Speed/gripping force control

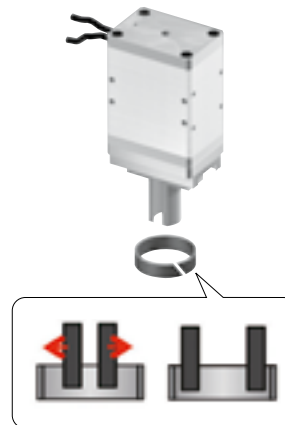

#### No changes over time

Motion more constant than pneumatic system



### Wide variety

#### Small single cam type

SS-2005-3N / 2005-5N



#### Single cam type

SS-2010 / 2815 / 4225



#### Double cam type

SD-2005 / 2810 / 4220




#### Screw type: Straight / T-shaped

FS-2020 / 2840 • FT-2020 / 2840



### Simple connection (expansion board and internal wiring eliminates hassle of wiring)

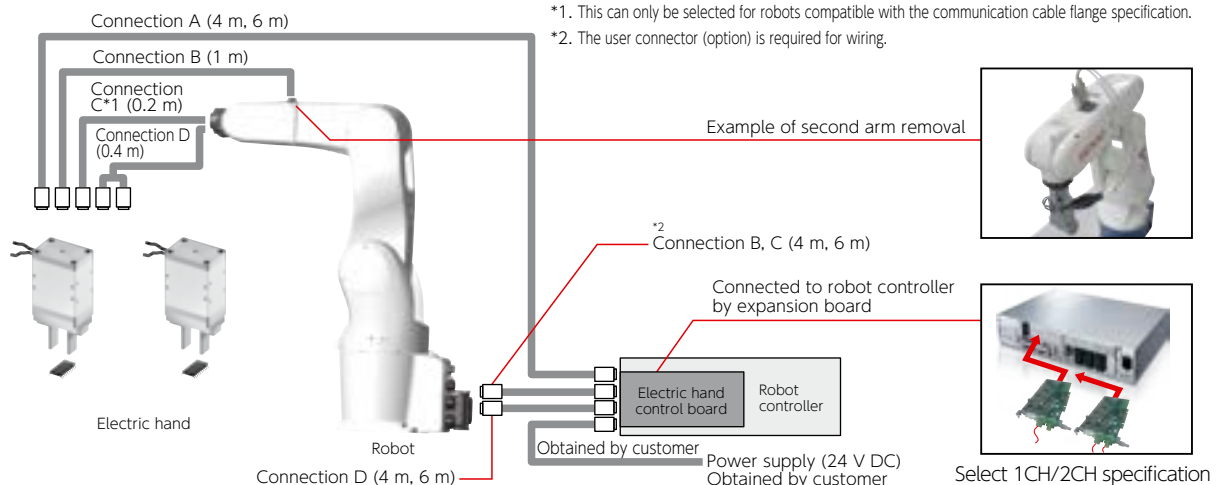

# RC8 Controller Protective Box Light

Protect your robot controller from harsh environments where equipment is exposed to oil, dust, and other contaminants.

The product offers the same waterproof performance as the previous design, but at a lower price.

Compatible controllers	RC8A (standard specifications, safety motion specifications, and safety I/O-less specifications), RC8
------------------------	---


\*VM series, VS068/087 with extended-joint support  
If using the MC8 (with total motor capacity of 2,000 W or greater), use the previous RC8 Controller Protective Box.



## Features

### IP54 protection to withstand harsh environments

The RC8 Controller Protective Box Light delivers the same IP54 protection as the original RC8 Controller Protective Box, but at a more affordable price point.

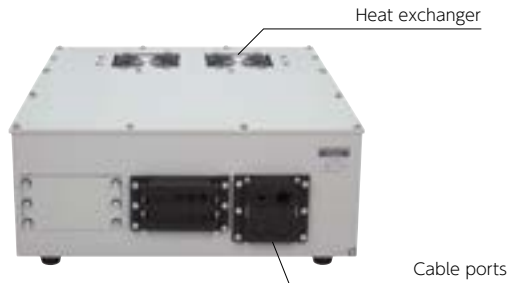

### Space for options

The box can accommodate an encoder HUB.




## Specifications

Item		Specifications
Supported controllers		RC8 type controllers (with space for encoder HUB)
Operating environment (temperature and humidity)	During operation	0°C to 40°C, 90% RH or less (no condensation allowed)
	During storage or transport	-10°C to 60°C, 75% RH or less (no condensation allowed)
Protective structure		IP54 or equivalent
Installation orientation		Freestanding
Weight		Approx. 17.5 kg (not including robot controller)
Power supply *1	Three-phase	185-253 V AC (200 V AC-7% to 230 V AC +10%)
	Single-phase	207-253 V AC (230 V AC ±10%)
Heat exchanger	Cooling capacity	25 W/K (calculated for temperature difference of 1°C)
	Power supply	From controller power supply (using single-phase 200 V AC from branch at terminal block)

\*1: Differs from the power supply specifications of the standalone RC8.

## Dimensional outline drawing

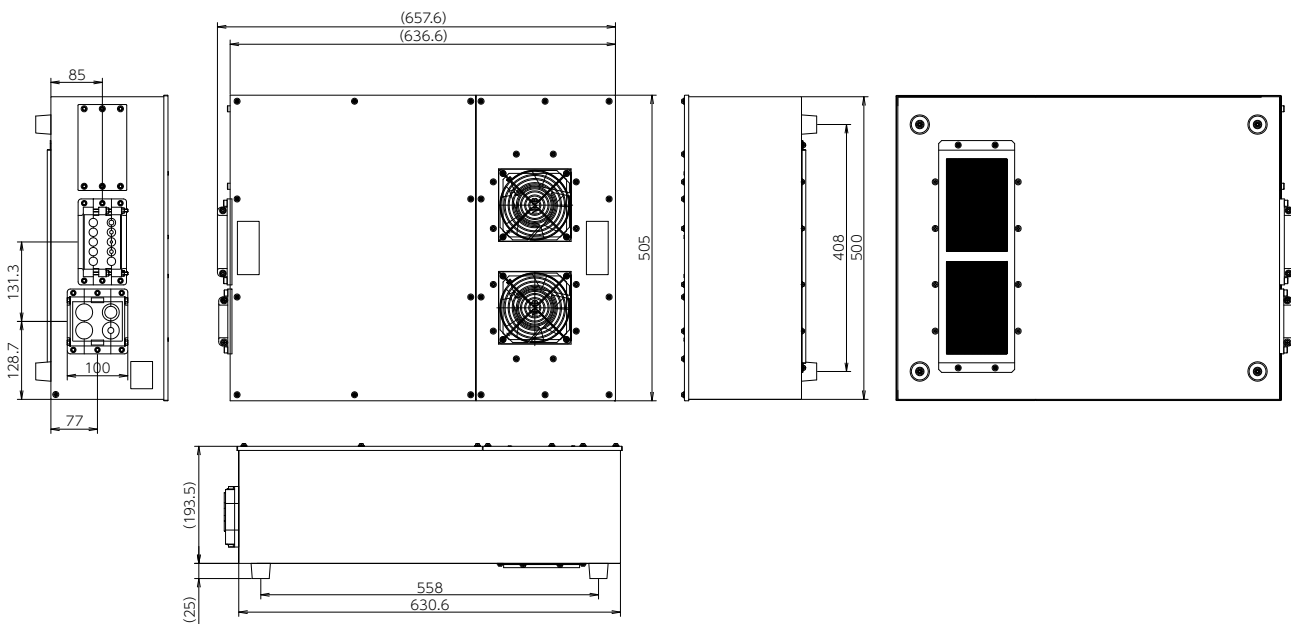

# Automatic Hand Changer

## Features

- Can be attached as is to the flange area of a DENSO robot.
- Comes standard equipped with a mechanism to prevent the hand from dropping due to reduced air pressure, and an airlock check valve used when detaching the hand.
- Up to 6 pipes and 10 wires can be connected.

Compatible robots	Name	Model	Weight	Moment of inertia	Thickness	Hand mounting hole
VP Series VS Series	AHC unit	AHC5-U	0.44 kg (including plate)	$2.77 \times 10^{-4}$ kg·m <sup>2</sup>	55.5 mm (including plate)	4-M5 P.C.D44
	Adapter	AHC5-A				
	Mounting plate	AHC5-P				
	Stand(*2)	AHC5-S				
VM Series	AHC unit	AHC5-U	0.39 kg	$2.6 \times 10^{-4}$ kg·m <sup>2</sup>	45.5 mm	4-M5 P.C.D44
	Adapter	AHC5-A				
	Mounting plate	AHC5-P				
	Stand(*2)	AHC5-S				
HSR® Series HS-A1 Series HM Series(*1)	AHC unit	AHC10-U	0.6 kg	$5.1 \times 10^{-4}$ kg·m <sup>2</sup>	49 mm	4-M5 P.C.D50
	Adapter	AHC10-A				
	Mounting plate	AHC10-P				
	Stand(*2)	AHC10-S				

\*1: HM Series is compatible only with the 10 kg payload specification.

\*2: The model code for the AHC stand (with sensor) is described below. The model code of the stand (without sensor) would be "AHC\*S".

AHC*S	□	□
Contact points:	Cable length:	
A: 2	No code: 0.5m	
B: 3	L:3m	

## Specifications

Item		Specifications	
Model		AHC5 (5/6-axis specification)	AHC10 (4-axis specification)
Position repeatability		±0.01mm	±0.015mm
Connection axial force resistance (0.5MPa)		802N	1420N
Moment resistance (0.5MPa)		24N·m	49N·m
Torque resistance (0.5MPa)		24N·m	49N·m
Ambient temperature		0 to 60°C	
Interfaces	Air	Circuits	6
		Maximum usage pressure	0.7MPa
		Effective cross-section area	1mm <sup>2</sup>
	Electricity	Connections	10
		Contact point capacitance	3A



Adapter (hand side)



AHC unit (robot side)



# AUTO-ID Products



## Auto-recognition products for use in manufacturing

In applications such as...

- Process / progress management
- Shipping and receiving inspection
- Picking
- Inventory management
- Automated lines

## Handy terminal

### ● BHT-M80: BHT-M60 series

Android™ 10 for exceptional communications capabilities and operational expandability

- The product line includes the BHT-M80, which features a large, 5.0" display, and the BHT-M60, which combines a 3.2" display designed for maximum ease of use and a keypad.
- Built with best-in-class drop resistance to withstand daily use.



## QR code solutions

### ● Face authentication SQRC

Provides rigorous authentication performance, making it ideal for applications such as the detection of credentialed users.

- Data describing facial characteristics is converted into a secure QR Code (SQRC) to enable authentication without requiring new servers or other equipment.
- One-on-one offline authentication that avoids storing personal information on a server reduces security risks.



## UHF-band RF tag high-power handy scanner

### ● SP1

The world's highest reading performance

- Streamline operations with scan speeds of up to 700 tags per second and a scan range of about 8 m.
- DENSO's proprietary RFID verification app features smooth deployment and stable operation.



## UHF-band RF tag fixed scanner

### ● UR40 / UR50

Reliable scanning, even on high-speed conveyor lines

- The UR40 delivers long-distance scanning at distances of up to 8 m. \*1
- The UR50 delivers scanning at super-close distances of 5 mm to 50 cm (when using an expansion antenna).
- High-speed scanning at up to 600 tags per second helps reduce lead times. \*2



\*1: With linear polarization.

\*2: Subject to country- and function-specific limitations. Reference values; performance varies with actual environmental conditions.

# Software

## Software

### Result-oriented and more efficient: Expanded DENSO Robotics Solution.

From the implement decision phase to robot maintenance, a variety of helpful production site and factory floor tools are offered to make DENSO Robotics easy to use.

### Software Line up



#### Wincaps® III

##### Offline Programming Software

Software used to program DENSO Robotics (PAC language, PacScript) and create simulations on the program



#### Wincaps® Plus

##### Offline Programming Software

Software used alongside Wincaps III to provide optimal applications for use cases such as design, deployment, and maintenance



#### EMU

##### Robot Simulation Software

Software that allows you to run simulations for multiple DENSO Robotics



#### RC Vision

##### Robot Vision Package

A robot vision application software package that utilizes DENSO Robotics and cameras to support equipment startup



#### Robot Tools

##### Utility Application Software

Software to support optimum maintenance and operation of DENSO Robotics based on running costs and daily maintenance



#### VRC

##### Virtual Robot Controller

An emulator that creates an image of RC8A (robot controller) itself and provides a virtual RC8A environment on the PC



#### ORiN® 2 SDK

##### Software Development Kit

Middleware used to develop an application program or provider based on the ORiN®2 specifications



#### Mobile Tools

##### Smart Device Application Software

A set of application software for smart devices that support equipment startup or maintenance using DENSO Robotics products



## Offline Programming Software

WINCAPS III software provides across-the-board support for DENSO Robotics, from the deployment study stage to maintenance.

The software supports operation of DENSO Robotics products by providing an extensive range of functionality at low cost, including for creating robot programs, backing up controller data, and reviewing robot posture using 3D drawings.

### Accessible interface and ease of use


WINCAPS III delivers intuitive ease of use and refined operability so users can easily check teaching points and interference with peripherals.

### Program creation

Immediately simulate program content in the program editing window on a PC. You can also display errors like spelling mistakes using the program error-checking function.

### Online functions

Connect to robot controllers and use monitor and debugging functions. You can easily send and receive program data and receive and save log data.

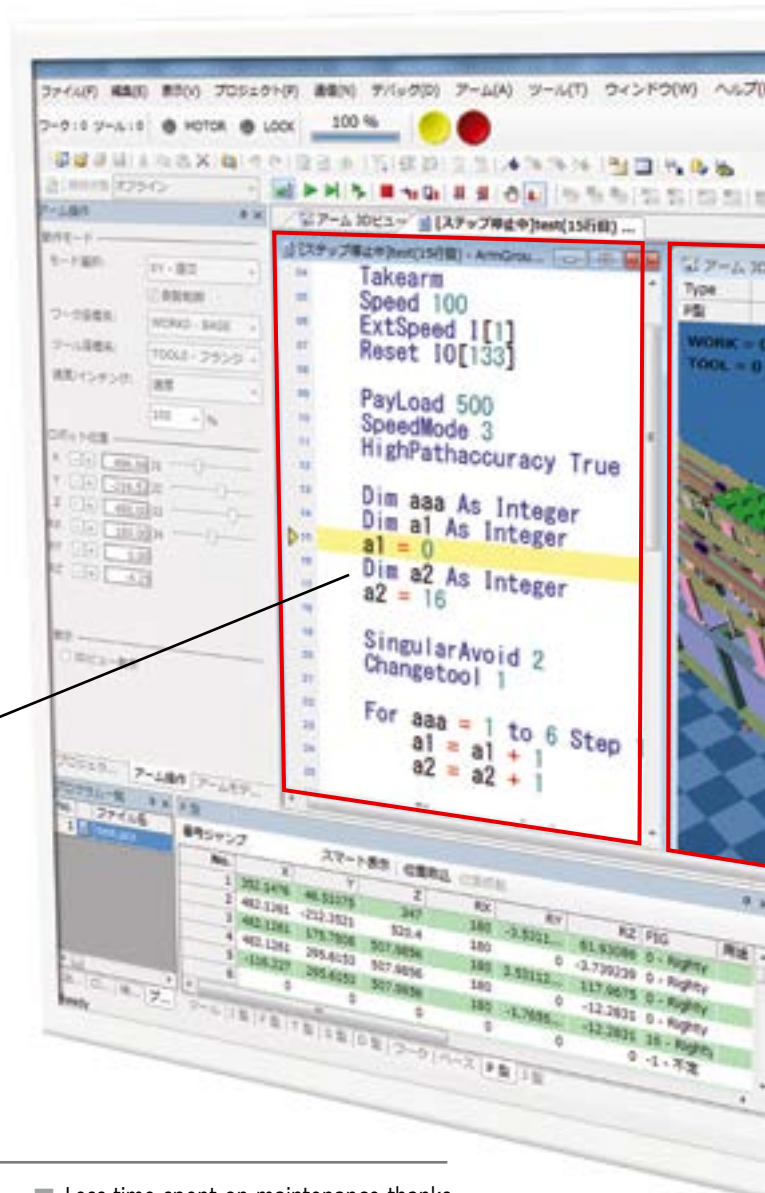

## Benefits

- Less time spent designing and fabricating robotic equipment
  - Significantly shorten the amount of time spent getting equipment up and running.
- Less time spent on maintenance thanks to extensive logging functionality
  - Speed up analysis work.

## Features

### Equipment conceptualization/design

#### 3D CAD data import

Check equipment interference and teaching points.

#### Support for VRML and Direct X 3D CAD

Easily check equipment interference and teaching points without relying on the actual hardware.




Import 3D data, monitor robot operation, and easily check equipment interference and teaching points using manual controls.

### Operation preparation and equipment adjustment

#### Robot simulator

Simulate robot programs on a PC.

Display speed and cycle time.

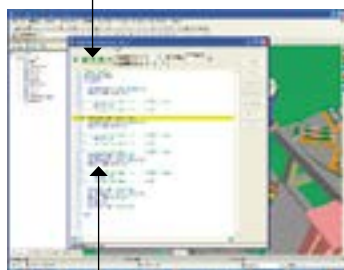



Display the program line being executed. Unsupported command lines are shown with cross-hatching so they're easy to identify.

### Operation/maintenance

#### Extensive robot analysis tools

Sophisticated monitoring functionality and extensive log management  
Generation of backup data

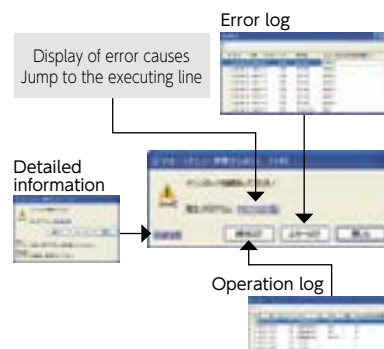

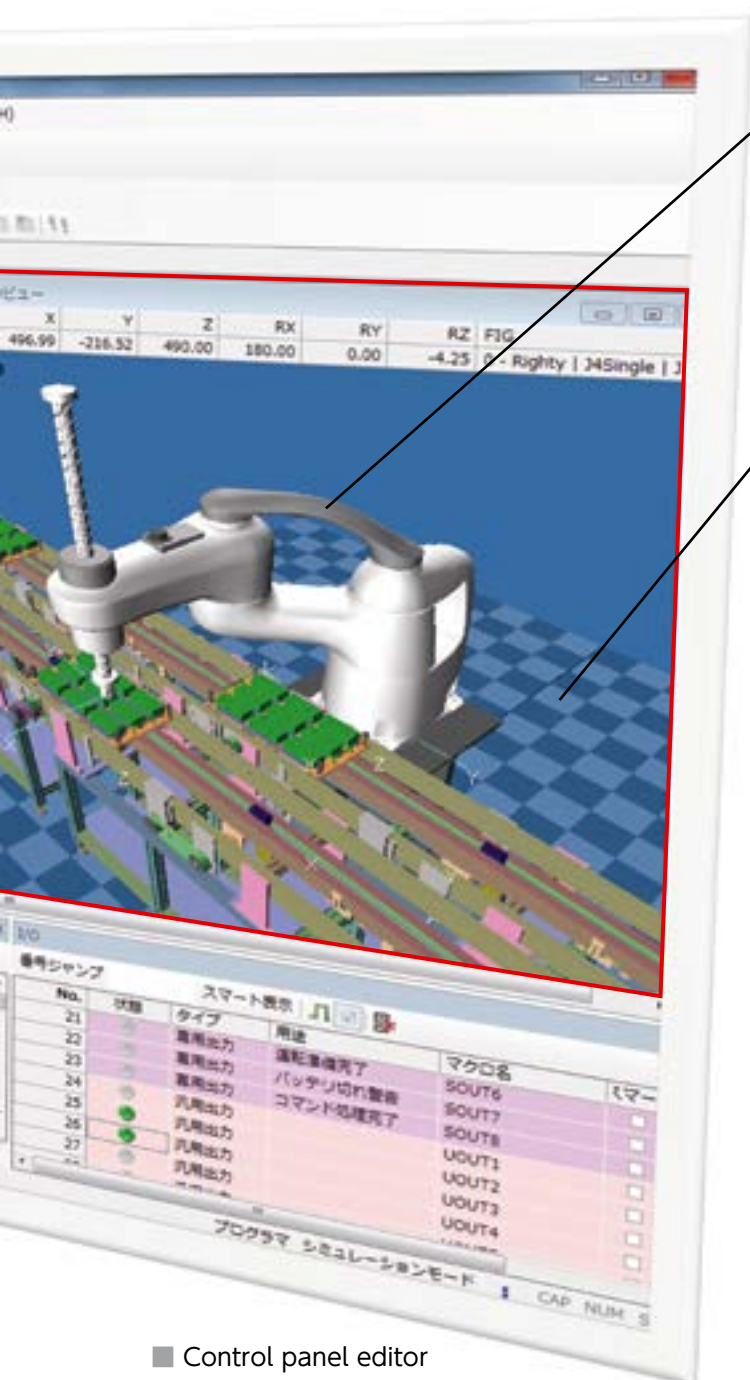

## Arm 3D view

Displays the robot and peripheral devices in 3D and simulates robot motion on a PC. Since you can easily zoom in and out and switch perspectives using the mouse, you can perform simulations while viewing the equipment and robot from the desired angle, through 360°.

## Simulation functions

Execute user-created programs on the PC to check cycle time, robot movement, pose and interference. Since you can perform simulations without operating the actual robot, you can develop programs safely and efficiently.

### Convenient functions

- Interference checking
- Cycle time measurement
- Robot path display

## Log function

View error logs, operation logs, trace logs, and other data.



## Simple calibration

The following 3 types of calibration can be used:

CALSET	Corrects the CALSET value. Overwrites a CALSET value with the correct value based on a standard position when a motor is replaced or the CALSET value lost.
TOOL	Corrects the value of the selected TOOL. Use when a hand or other end effector is recreated, replaced, or newly created.
WORK	Corrects the value of the selected WORK. All WORK coordinates that were set when the robot mounting position is changed can be corrected at once.

## Control panel editor

Create a teaching pendant control screen on a PC.



Functions	Full Function Version	Light Version *1	Trial Version *2
Create new program / edit program	✓	✓	(*5)
Program bank	✓	(*3)	(*3)
3D CAD data import	✓	—	—
3D view teach	✓	✓	✓
Simulation function	✓	—	—
Debug function	✓	—	—
Monitoring	✓	(*4)	(*4)
Movie save function	✓	✓	✓
Print	✓	—	—
Simple calibration	✓	✓	✓

Windows is a trademark or registered trademark of Microsoft Corporation in the U.S. and/or other countries.

System requirements:

[OS] Windows® 10/ 11

[PC] CPU: 2 GHz or faster multi-core processor, RAM: 2 GB or more, HDD: 1 GB or more

Languages supported: 5

Japanese, English, German, Korean, Chinese

\*1: Included with purchase of mini pendant. \*2: Supplied with robot.

\*3: There are limits to the number of libraries that can be used.

\*4: Sampling interval: 1 sec. \*5: One program (PRO1) only.




## Offline Programming Software

Used alongside WINCAPS III, this suite of software helps you save man-hours by optimizing operation in use cases such as design, deployment, and maintenance.  
Purchase only the software you need.

### 3D Visual Programming

This programming software lets you easily teach and control hardware by placing items in an arm view so that it can be used by even programming novices.  
It can also be used to create the framework for more complex programs.

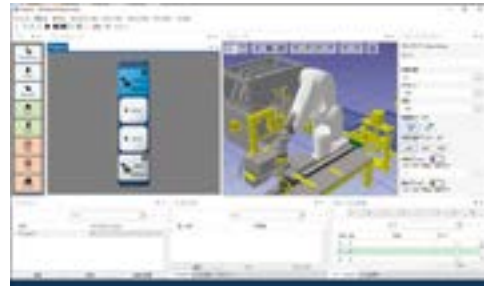

#### Features

##### Visual teaching and control

Enjoy intuitive operation and teaching by clicking and dragging robots in the Arm Viewer. Since commands such as flow control instructions are shown on the robot's path, you can ascertain at a glance what operations are being performed on the path.

##### Convert created programs to PacScript

Programs created using 3D Visual Programming can be converted to PacScript, the DENSO Robotics development language. By converting the operational framework created in 3D Visual Programming to PacScript and then adding details, you can create programs that implement complex operations.

##### Simple programming by choosing from an extensive selection of block programs


Create programs using a flowchart simply by choosing and placing items in line with your application from an extensive selection of block programs. By making it easy to understand the overall program and identify locations that need to be changed, this approach can reduce programming man-hours.

##### Easy visualization and sharing of equipment operation

3D Visual Programming lets you visually express robot operation. You can easily visualize and share equipment operation, for example when explaining equipment structure to colleagues involved with your project, including production and maintenance personnel who are working with actual robots.

### Optimized Motion Planner

When you specify the starting and ending points for a robot operation, the program will automatically generate the path with the shortest cycle time while avoiding obstacles. By allowing robot paths, the design of which until now has relied on user experience, to be generated scientifically, this capability lets both veterans and novices alike realize the same level of performance when operating robots.

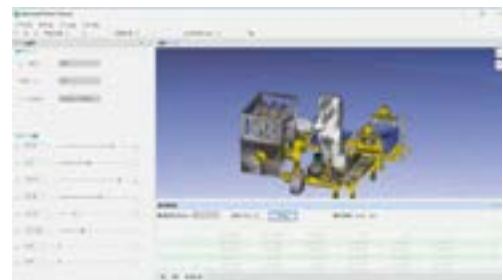

#### Features

##### Fewer adjustment man-hours

By acquiring CAD data for peripherals in advance, determining starting and ending points, and automatically generating a path while avoiding peripherals, you can significantly reduce the number of man-hours spent on confirmation work using actual equipment and detailed teaching work.

##### Reduced takt times

The software helps shorten takt times by calculating the shortest path and generating waste-free robot movements while avoiding collisions with peripherals.

#### Execution procedure

Both veterans and novices alike can easily generate an optimal path using the following procedure:



(1) Import CAD data with the Robot Viewer\*.



(2) Set the robot's starting and ending points.



(3) Set via points.



(4) Automatically calculate the path.

\*Robot Viewer is a 3D viewer used by the various software components of WINCAPS Plus. It can also be used as a layout verification tool with robots and peripherals.

## Return-to-origin guidance

Based on the assumption that the path taken by the robot during automatic operation is safe and free of obstructions, the software uses automatically collected information about the robot's path to generate a path by which it can safely return to the origin. Operations can also be partially played back in reverse.



### Features

#### Elimination of the need to create complex programs


The software completely eliminates the need to spend an enormous number of man-hours on programming while painstakingly avoiding collisions with peripherals in order to return the robot safely to the origin.

#### Simple return-to-origin operation

Since the robot can easily be returned to its origin using a Smart TP, functionality is accessible to on-site operators who may not be familiar with robot operation.

### System configuration diagram

#### Using the RC9



#### Using the RC8A



## Robot Viewer

Robot Viewer is a 3D viewer used by the various software components of WINCAPS Plus. It makes it easy to import 3D CAD data and display CAD models in WINCAPS III. It can also be used as a layout verification tool with converted-output robots and peripherals. \*Robot Viewer can be used with WINCAPS III.



### Features

#### Easy import and output of 3D CAD data

Robot Viewer can import 3D CAD data in formats such as STEP, IGES, VRML, and X\*. It can also convert CAD models and output them in the VRML and STL formats. \*We plan to add Parasolid support in the future.

#### Use as a layout verification tool

Robot Viewer can also be used as a layout verification tool with robots and peripherals. Model structure and placement are managed easily using a tree. The ability to simplify and compress or expand placed model shapes makes layout verification easy.

## Palletizing Builder

Palletizing Builder simplifies everything from simulating to executing palletizing and depalletizing processes. Once you enter the shape and dimensions of the pallet and cargo, the software performs a series of automatic calculations and displays target positions that take the robot's movable range into account.



### Features

#### Simplifying time-consuming teaching for palletizing and depalletizing

Palletizing Builder dramatically reduces the amount of teaching required for palletizing and depalletizing processes, which until now have required time-consuming programming. Combine with the high-payload, long-arm-reach VMB series and VLA series for an even broader range of uses.

#### Easy simulation of loading method, weight, and other parameters

The software makes it easy to set pallet and box sizes. The ability to simulate the optimal box loading method, stack height, and weight for pallets helps save man-hours.

### Simple operation



Set the box size.



Set the pallet size.



Set the loading method for the pallet.



The software automatically calculates the stack height based on the height settings.



The loading method for each level can be easily customized.



Simulations take into account the robot's movable range.

## System Requirements

The following environment is recommended:

	Palletizing Builder	Optimized Motion Planner	Robot Viewer	3D Visual Programming
OS	Windows 10/64 (Version 1803) or later			
Screen size	WXGA (1280×800) or better	Full HD (1920×1080) or better		WXGA (1024×768) or better
CPU	2-core 2 GHz or better	4-core 2 GHz or better		
RAM	8 GB or more	16 GB or more		
GPU	—	Discrete GPU recommended (reliance on onboard graphics is not recommended)		
Other	Microsoft .NET Framework 4.7.2 or later			Microsoft .NET Framework 4.7 or later

\*These applications assume that WINCAPS III has been installed on the same computer.




## Robot Vision Package

RC Vision is a robot vision application software package that utilizes DENSIO Robotics and cameras to support equipment startup.




### 1<sup>st</sup> EVP2 Easy Vision Picking 2

- EVP2 is an image processing application that adds significantly enhanced functionality to EVP's simple operation. EVP2 is a programming-free image processing application specially developed for use with a "pick & place" robot. This software offers enhanced functionality and several times greater processing power than the previous EVP application, while maintaining the same ease of operation.
- EVP2 consists of EVP2 Guidance and EVP2 Runtime.
  - Image processing operations can be set using the application (EVP2 Guidance) that runs on a PC.
  - When EVP2 Runtime is running, only the robot controller and connected camera are required for operation.

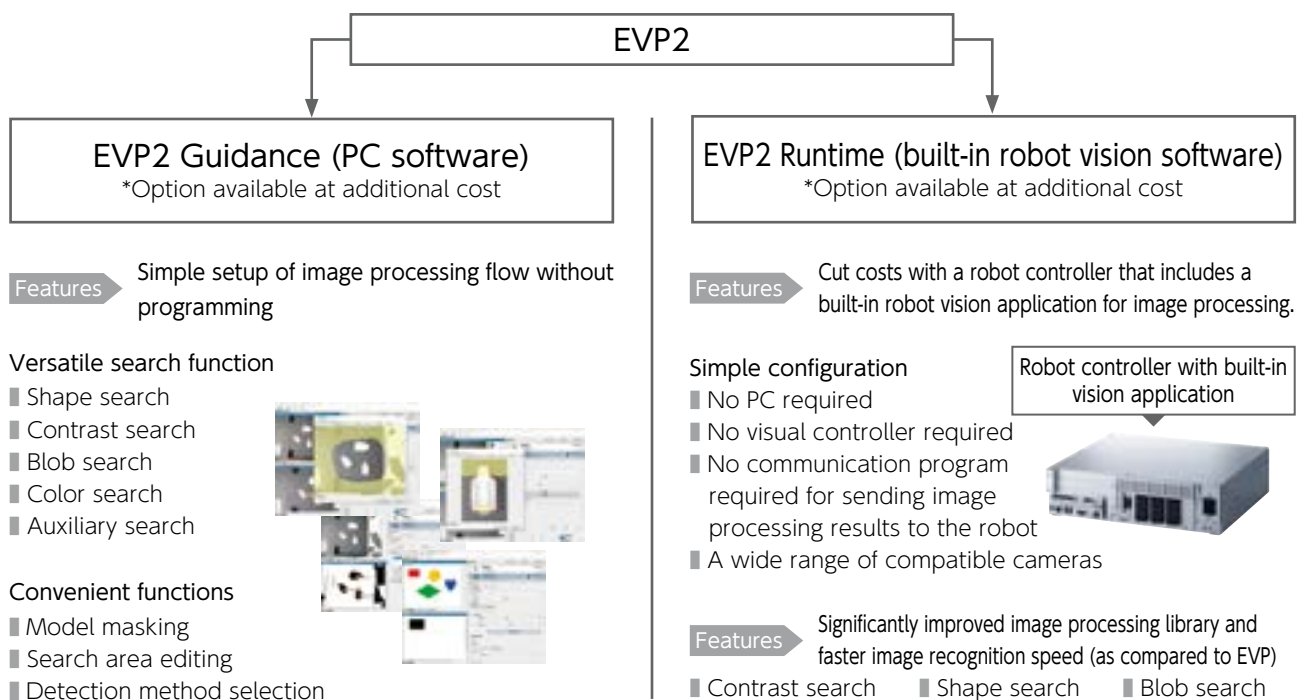

### System configuration diagram

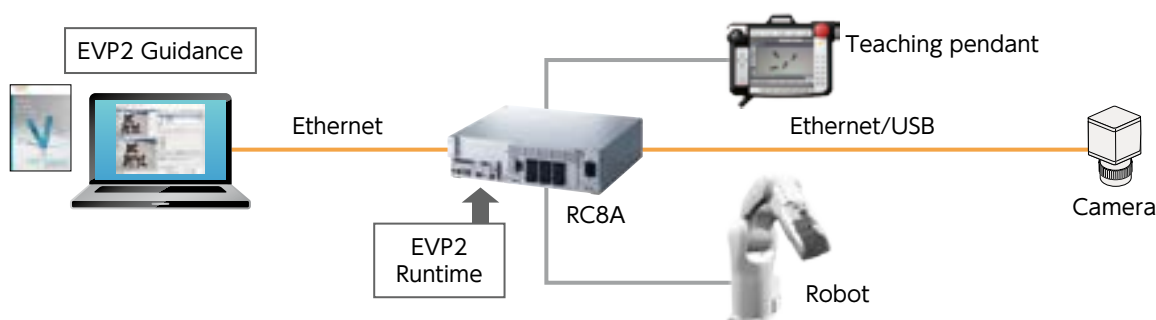


## Enhanced basic functionality: Improved robot vision functions



### Interference check function

This function prevents the end effector from colliding against adjacent workpieces when grasping the detected workpiece.



### Part presence detection function

This function determines whether the detected workpiece is located within the specified area. The area can be specified based on the check direction, the number of longitudinal divisions and the number of lateral divisions.



### Part distribution detection function

The position of the feeder can be controlled by dividing the area and accurately identifying the location of each part.



### Palletizing sort function

This function sorts the detected workpieces according to the specified rule. The workpiece sort sequence can be decided based on the sorting direction and the number of divisions.

## Operating environment

- [ O S ] Windows® 10
- [ P C ] CPU: 2 GHz or faster multi-core processor, RAM: 4 GB or more, HDD: 4 GB or more

[Recommended cameras] Basler GigE camera (ace series)  
iDS USB camera (uEye SE series)  
Canon network camera (WebView Livescope series)  
Canon network camera (N10-W02)

\*Windows is a trademark or registered trademark of Microsoft Corporation in the U.S. and / or other countries.


\*For more information about EVP, please contact our sales representative.

## 2<sup>nd</sup> EIS Easy Image Store

### Overview of EIS

EIS is a software to store the images of cameras connected to RC8A. Images taken by the built-in image processing application (EVP) in RC8A are temporarily stored in RC8A and reset when power is turned off. With EIS, the images can be stored automatically in PC as image files.

### Expanded image

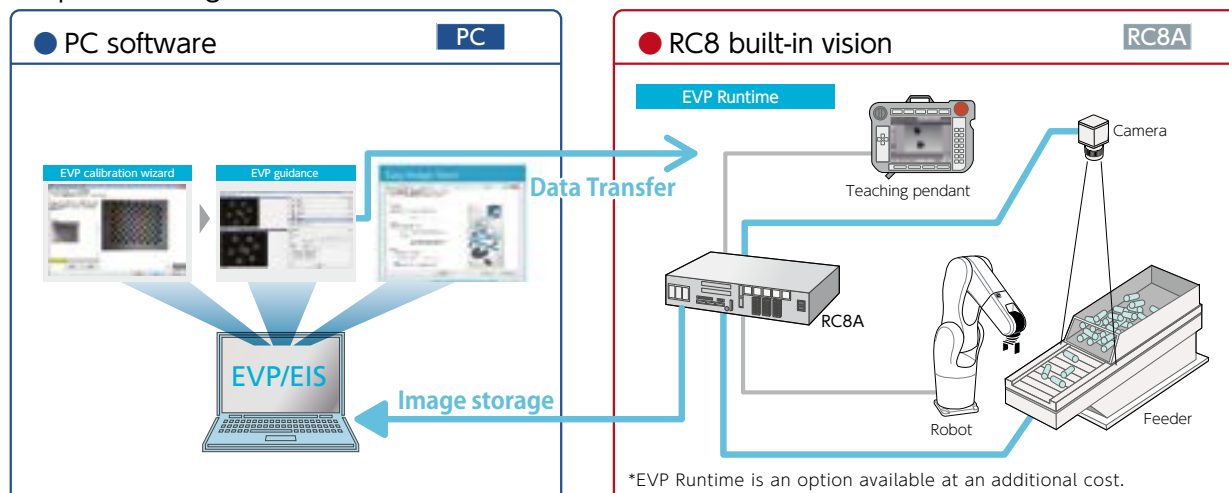


System requirements: [OS] Windows® 10 [PC] CPU: 2 GHz or faster multi-core processor, RAM: 2 GB or more, HDD: 1 GB or more  
[Camera] Basler GigE camera (ace series), iDS USB camera (uEye SE series), Canon network camera (WebView Livescope series)



## Integration Middleware for PC

**ORiN®2 SDK** is a software tool kit used to develop an application program or provider based on ORiN®2 specification.

- It provides a standard communication interface for robots as well as various FA peripherals and databases.
- ORiN®2 SDK is mounted with a variety of functions (including a CAO engine, test program, sample program and skeleton provider auto generate tool) to support development.
- The superior expandability of ORiN®2 supports not only industrial robots, but a variety of devices (including PLC, CNC machine tools, bar code readers and RFID) to enable application development that is independent of manufacturer or model.

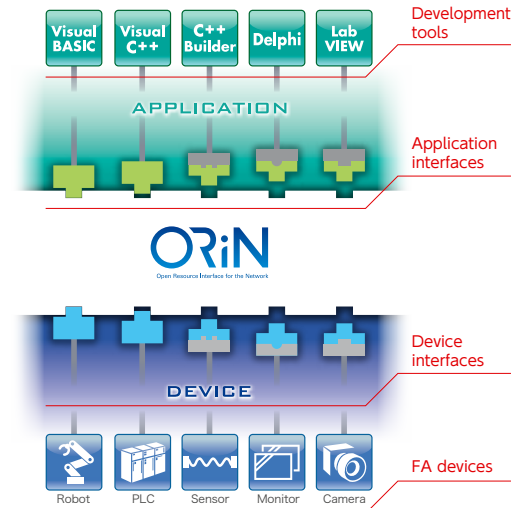

## Features

### Provides a standard interface

ORiN®2 enables easy system development that supports distributed object technologies such as DCOM and SOAP, and provides two standard interfaces: the application interface and device interface.

### Recycles applications

Equipped with a gateway to reciprocally connect with different standards (OPC and UPnP) and improve reusability of existing applications.

### Development tool options

Use any of the following development tools that support OLE (COM, ActiveX):

○ Visual C++ ○ C++ Builder ○ Visual BASIC ○ Delphi ○ LabVIEW ○ Excel, etc.

### Create an original provider

With Provider Wizard, a user can create an original provider to expand functions.

Package Type	ORiN®2 Software Development Kit (Ver. 2.1.21)											
	Provider Development			Runtime + Utilities Set			Runtime			DENSO Products		
Purpose	Provider Development + Execution Environment			Execution Environment + Expanded Components			Execution Environment			Execution Environment (limited to DENSO Products)		
Application	Support	Binary	Source	Support	Binary	Source	Support	Binary	Source	Support	Binary	Source
ORiN engine*1	✓	✓	—	✓	✓	—	✓	✓	—	✓	✓	—
ORiN provider development tools	✓	✓	—	—	—	—	—	—	—	—	—	—
ORiN provider*2 (provider quantity)	✓	✓	✓	✓	✓	—	✓	✓	—	✓	✓	—
	39	200	62	39	200	0	39	200	0	22	43	0
Test and configuration tools	✓	✓	—	✓	✓	—	✓	✓*8	—	✓	✓*8	—
CAO-OPC*3	✓	✓	—	✓	✓	—	—	—	—	—	—	—
CAO-OPCUA*4	✓	✓	—	✓	✓	—	—	—	—	—	—	—
CAO-SQL*5	✓	✓	—	✓	✓	—	✓	✓	—	✓	✓	—
CAO-UPnP*6	—	✓	—	—	✓	—	—	—	—	—	—	—
CAO-Script*7	—	✓	—	—	✓	—	—	—	—	—	—	—

\*1. This is middleware that provides the client with common functions and the ORiN interface; it is an EXE type COM component that forms the core of ORiN.

\*2. This is the communication interface that connects FA devices and the PC; it is a DLL type COM component that eliminates the differences in communication specifications between the various devices.

\*3. This is the gateway module to ORiN that provides the OPC (OLE for Process Control) server functions.

\*4. This is the gateway module to ORiN that provides the OPC UA (OPC Unified Architecture) server functions. The "OPC UA Server License" is separately required to use CaoOPCUA.

\*5. This is data management middleware that collects data from the various FA devices and provides this collected data to CaoSQL client applications (operation monitoring, production command software, etc.).

\*6. This is the gateway module to ORiN that provides the UPnP (Universal Plug and Play) device functions.

\*7. This is a simple programming development environment that enables the creation of simple application programs using a script language (CaoScript).

\*8. Only CaoConfig and CaoTester are offered.

System requirements: [OS] Windows® 10 IoT / 10 / 11 IoT / 11, Windows Server® 2016 / 2019 / 2022

[PC] CPU: 2 GHz or faster multi-core processor, RAM: 2 GB or more, HDD: 1 GB or more free space


OPC is a trademark or registered trademark of the OPC Foundation in the U.S. and/or other countries. ORiN is a trademark or registered trademark of the Japan Robot Association. Windows is a trademark or registered trademark of Microsoft Corporation in the U.S. and/or other countries.



## Robot Setup / Maintenance Support Tools

Robot Tools comprises a suite of utility software that supports optimum maintenance and operation of DENSO Robotics.

- It can be used to streamline daily maintenance work and reduce post-installation running costs of robots.

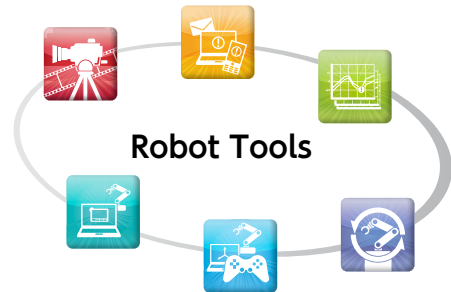

### Product features System requirements: [OS] Windows® 7 / 8 / 10 [PC] CPU: Pentium® III 1 GHz or faster, RAM: 512 MB or more, HDD: 500 MB or more




#### Image Logger

This software helps identify the cause of sudden equipment issues and assembly problems. It captures video before and after issues occur along with associated equipment data (I/O, variables, etc.). By reviewing the video and data, you can pinpoint the cause of the issue and improve the equipment accordingly.




#### Mobile Monitor

This software monitors controller status and provides email notification of anomalies and other equipment issues, for example to remote workers' mobile phones, so that quick action can be taken. It helps improve maintenance and streamline operations.



#### Control Log Analyzer

This software acquires control logs from a specified controller and automatically generates a graph display. It can analyze a robot's control status (for example, to detect problematic waveforms), and it stores the control log as a database so that it can be compared with past data. It helps improve maintainability and helps users visualize (quantify) errors.



#### Virtual TP

When the controller is in manual mode, this software serves as a virtual teaching pendant running on a PC so that the controller can be configured (GUI) and monitored remotely. It also improves maintainability and aids in configuration when operating without a mini pendant or teaching pendant.




#### GP Operator

This software lets you connect a robot controller to a PC and provides simple robot control using a mouse or game pad. It also helps developers perform teaching work by allowing them to teach specified variables (P, J, and T types) and control robots using a PC.



#### Easy Backup

This software creates and restores full backups for multiple controllers. The ability to automatically create full backups reduces work times, while the ability to restore full backups helps speed recovery in the event of a problem. It helps improve maintenance and streamline operations.






## Robot Simulations

**EMU (Enhanced Multi-robot simulator) is a software that allows you to run simulations for multiple DENSO Robotics.**

- EMU allows you to use projects created in WINCAPS®III, coordinating with peripheral devices (models) and testing functionality in a state that is both virtual and real.
- EMU helps you achieve vertical startup for preliminary testing and production systems at the design stage for equipment centered on DENSO Robotics.

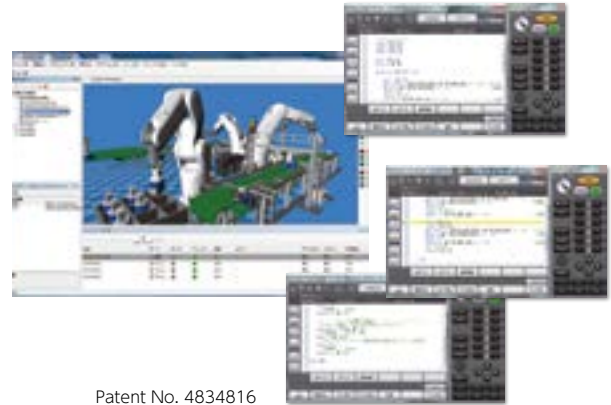


Patent No. 4834816

## Features

System requirements: [OS] Windows® 10 / 11 [PC] CPU: 2 GHz or faster multi-core processor, RAM: 2 GB or more, HDD: 1 GB or more  
\*Usage of EMU will also require the purchase of WINCAPS®III.


### Sequence control

You can control all operating sequences for the entire system by starting up each robot and using variables and I/O from the system controller program. Coordinated operation testing using multiple DENSO Robotics is also possible.

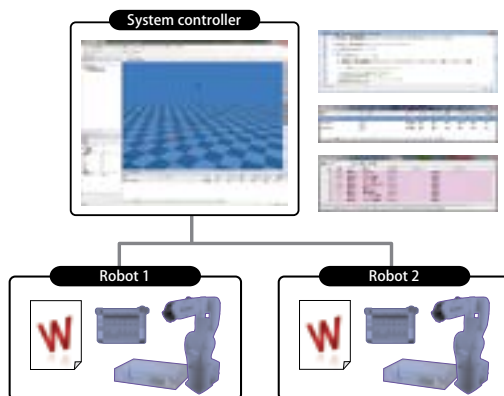


### Connection with Machine

Connecting with a machine enables you to view current position information for the robot obtained from the machine in a 3D viewer and authenticate motion in a mixed virtual and real environment.

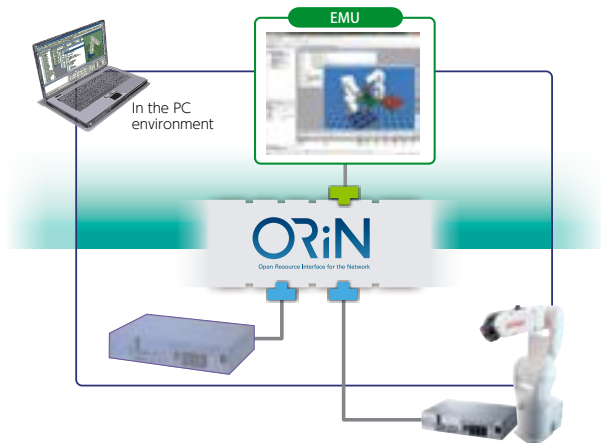

### Interference checking

Being able to check for interference between devices and preliminarily test operating sequences ensures a higher degree of perfection at the initial stage of design while helping shorten development times and reduce costs.

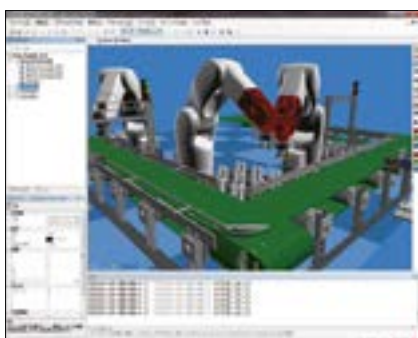

### Coordination of peripheral devices

EMU enables testing of the operation of all equipment linked to robots and peripheral devices such as workpiece conveyors and loaders without using the actual equipment.





## Virtual Robot Controller

As an RC9/RC8A (robot controller) virtual robot module, VRC provides a robot controller virtual environment on a PC.

- When programming in a universal language (Visual C++, Visual BASIC, Delphi, LabVIEW, etc.) on the PC, connecting to the VRC lets you control DENSO Robotics and monitor their statuses in a virtual environment.
- Being able to simulate the operation of actual robots without actually using them dramatically improves development efficiency.

### Features

#### Provides GUI


As a tool to make VRC states visible, the VRC Teach Pendant allows for the same usage and monitoring as the teach pendant. This tool enables you to check a variety of information including current position, variables, I/O and the error log.



Current position data



Variables



I/O



Error log

#### Simulation Link


Linking to VRC from commercially available simulation software provides feedback of RC9/RC8A (virtual environment) information (such as current position [P type, J type, and T type], variables, and I/O), that can be expressed by GUI of various simulation software products. Path and cycle time for robot motion can be expressed just as on the actual machine to provide simulations even closer to actual execution.

#### System requirements:

[OS] Windows® 10 / 11

[PC] CPU: 2 GHz or faster multi-core processor, RAM: 2 GB or more, HDD: 1 GB or more

\*Usage of VRC will also require the purchase of the ORiN®2 SDK.

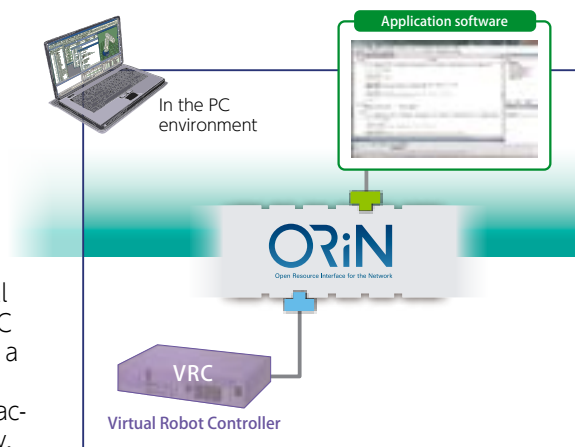

## Applications for smart devices

Mobile Tools is a set of application software for smart devices that support equipment startup or maintenance using DENSO Robotics products.

### Remote TP

- Remote TP displays the screens equivalent to those on the teaching pendant on the smart devices that the user is accustomed, enabling prompt response such as robot controller (RC8A) settings or status check by using the smart devices on hand even if teaching pendant or PC is not available.
- This application assists maintenance such as assisting the settings when using the mini-pendant or error/log check when TP is not available.
- This function takes advantage of smart devices features to improve efficiency.

Android terminal application


System requirements: [OS] Android 5.0 to 10.0, Tablet screen size: 4.6 inches or larger  
[Robot controller] RC8 Ver.1.10.3 or later



# IoT Products

## Connectivity changes the world. Connectivity ushers in the next generation.

Factory implementation of IoT involves gathering information from various devices and transferring this information to a host system. DENSO WAVE offers IoT products designed exclusively for use with the **IoT Data Management Platform**—a platform that achieves uniform accessibility with both existing and newly installed equipment based on Open Robot/Resource Interface Network (ORiN) technology.

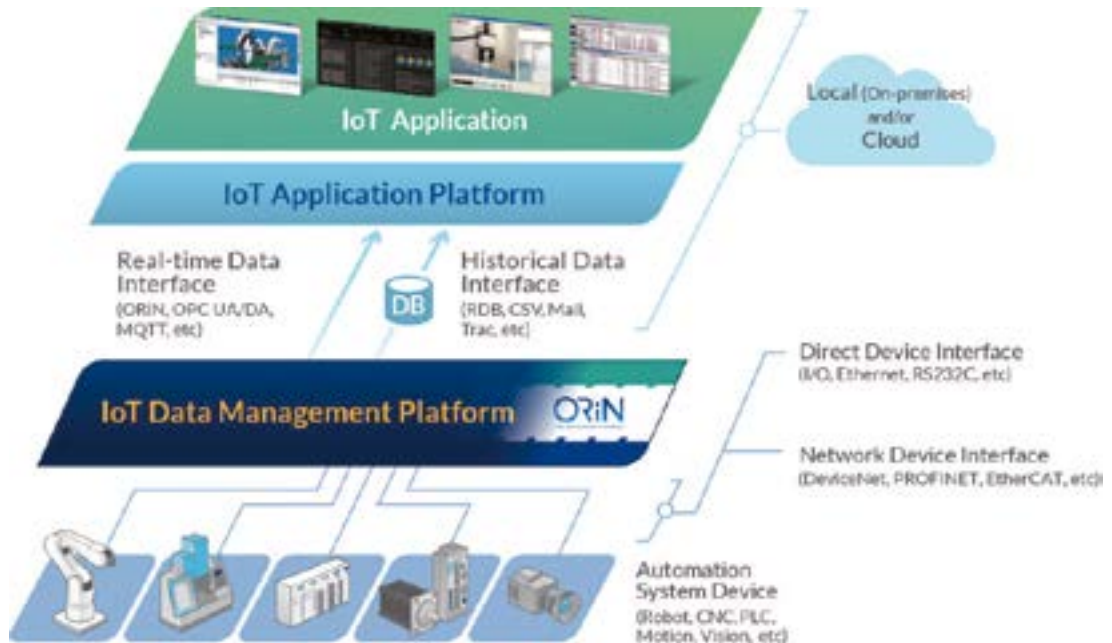

**IoT Data Server**

[Data Integration Controller]

Installation-free design for immediate use


IoT Data Server is a “Data Integration Controller” consisting of high reliable industrial computer and non-programming data integration software.

**ORiN**

Version 2

It equips standard data management functions developed especially for data collection, process, saving, notice and publishing.

These functions will help the data management in various scenes from the production cell system to production line, factory, cloud system.

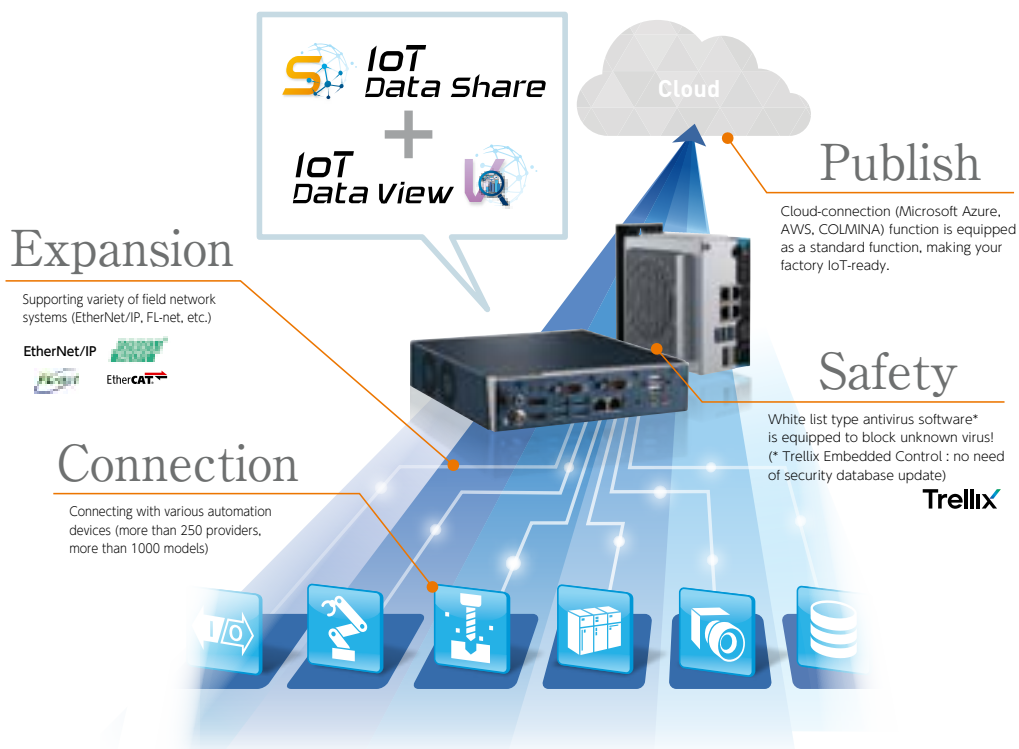



## IoT Data Share

[Data Integration Software]

Easy setup with thanks to programming-free implementation

IoT Data Share is "Data Integration Software" that enables to connect various automation devices without programming and to provide functions of data collect, process, save, notify and publish.

### Programming-free linking between equipment and system

#### Connecting to PLC with IoT Data Share

#### Setting with dedicated wizard only

Simply select the destination and register in the controller setting wizard



No need of special knowledge for software development. Easy and simple operation to connect equipment and applications.

- System requirements: [OS] Windows 10/11, Windows Server 2016/2019/2022  
[PC] CPU: Intel® Core i3 2.4 GHz or faster, RAM: 4 GB or more, HDD: 1 GB or more free space



## IoT Data View

[Data visualization dashboard]

Visualize the collected data in a simple way

IoT Data View is "Data Visualization Dashboard", which cooperates with IoT Data Share and easily visualize the collected data without programming.

ORiN  
Version 2

Using the supported web browser, dashboard screen can be created by simply linking collected data to the displayed parts like label, lamp or graph.

#### Login screen

Control referable information and executable functions according to the login level.

#### Edit screen

Create dashboard screen instinctively by drag and drop.

**Label**  
Outputs data as text

**Image**  
Import image and show as background image or output image

**Lamp**  
Change the color according to the data

**Graph**  
Output data graph (selectable from bar, line or pie) etc.

#### Home screen

Manage the created dashboard in a list.

#### Publication screen

Created dashboard can be displayed on the supported browser.

#### Simple visualization of equipment information without programming!

Without software expertise, you can visualize equipment data with simple configuration only.

##### System configuration

**Clients** No additional software installation is required  
Multiple client access supported

**IoT Data View**  
Visualizes data collected by IoT Data Share

**IoT Data Share**  
Collect data from automation devices without programming

##### ● System requirements

[OS] Windows 10/11, Windows Server 2016/2019/2022  
[PC] CPU: Intel® Core i3 2.4 GHz or faster, RAM: 4 GB or more, HDD: 2 GB or more free space  
\* "IoT Data Share" is separately required to use IoT Data View.

Supported languages: Japanese, English, Chinese (Simplified)

# DENSO Robotics Main Functions

## Robust compliance control function with force sensor Option available at additional cost

Configure force control easily, simply by specifying hardness levels  
Reduce man-hours spent on setting up force control by about 60%\*1 compared to the conventional approach.

Utilize a leading-edge force control algorithm with exceptionally improved robustness.\*2

\*1 Compared to previous Denso Wave products.


\*2 Robustness refers to the resilience of a system or machine with regard to disturbances. It signals flexibility in the face of external factors and lack of variability.

\* The function does not provide safety capability for reducing force in the event of collisions or contact with human workers.




### Simple parameters

Whereas conventional force control systems require the configuration of multiple force control parameters, Denso Wave's Robust compliance control function with force sensor can be configured easily simply by specifying a hardness level for contact for each axis.

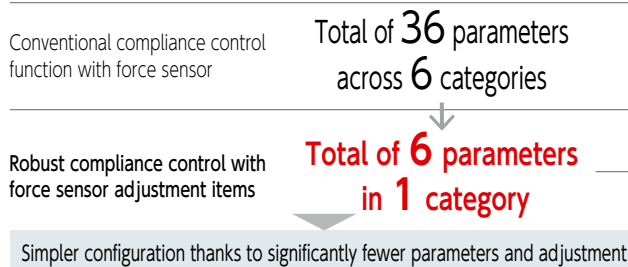

Item			Adjustment range	Details
Hardness level of contact target	Translation component	X	0 to 3	Set based on the hardness (rigidity) of the contact targets (workpiece and tool). Higher values allow faster movements. Translation: 0 (soft) to 3 (hard) Rotation: 0 (soft) to 1 (hard)
		Y	0 to 3	
		Z	0 to 3	
	Rotation component	Rx	0 to 1	
		Ry	0 to 1	
		Rz	0 to 1	


### ▼Conventional approach

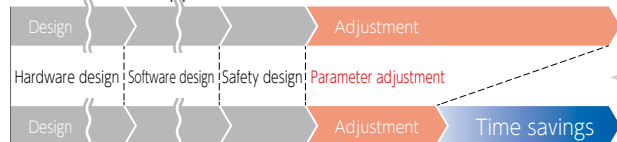

Reduce man-hours spent on setting up force control by about **60% compared** to the conventional approach, thanks to significantly fewer adjustment parameters.

### ▲Robust compliance control function with force sensor

### Main applications

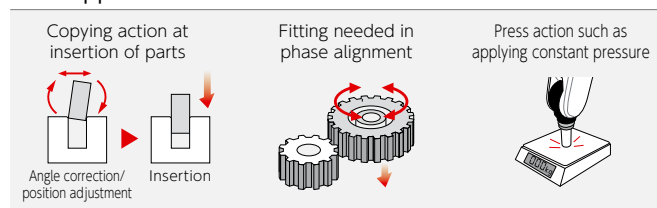


Compatible force sensors	
Manufacturer	Series
Wacoh-Tech	WEF-6A200-4-RCD: RS422 type, 200 N rated load
	WEF-6A200-4-RCD-B RS422 type, 200 N rated load
	WEF-6A200-20-RCD-B RS422 type, 200 N rated load
	WEF-6A500-10-RCD-B RS422 type, 500 N rated load
	WEF-6A1000-30-RCD-B RS422 type, 1,000 N rated load
ATI Industrial Automation	Axia, Nano, Mini, Gamma, Delta, Theta, Omega series*
SINTOKOGIO,LTD.	ZYXer series

\* Please review the instruction manual for more information about compatible force sensors.

### Compatible controllers

Controller	Type	Model
RC8A	6-axis robots	VP series, VS series (VS050/060/068/087), VM series

### System configuration

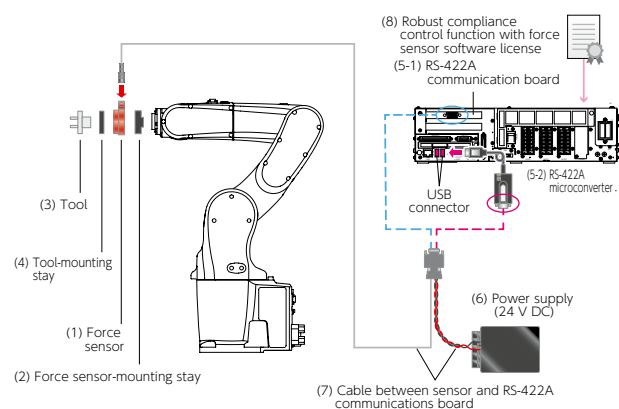


Components*		
(1) Force sensor	Select one	(5-1) RS-422A communication board
(2) Force sensor-mounting stay		(5-2) RS-422A microconverter
(3) Tool		(6) Power supply (24 V DC)
(4) Tool-mounting stay		(7) Cable between sensor and RS-422A communications board
		(8) Robust compliance control function with force sensor software license

\* The customer is responsible for providing components (1) through (7).



## Compliance control Function with force sensor Option available at additional cost

Feedback control from a force sensor and DENSO exclusive strength control algorithm enable detailed copying, fitting and press action. Dedicated GUI allows monitoring of feedback values from the force sensor and enables force control settings to be adjusted to aid reduction of man-hours to startup.

System configuration diagram

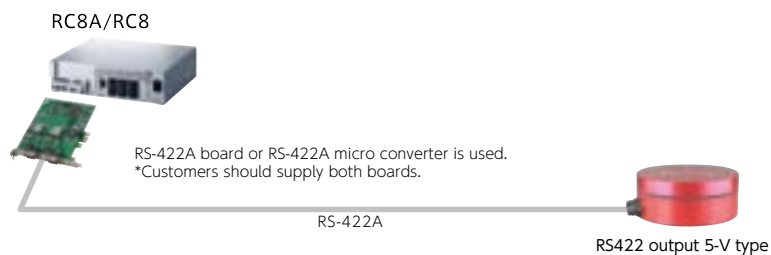

### Main applications

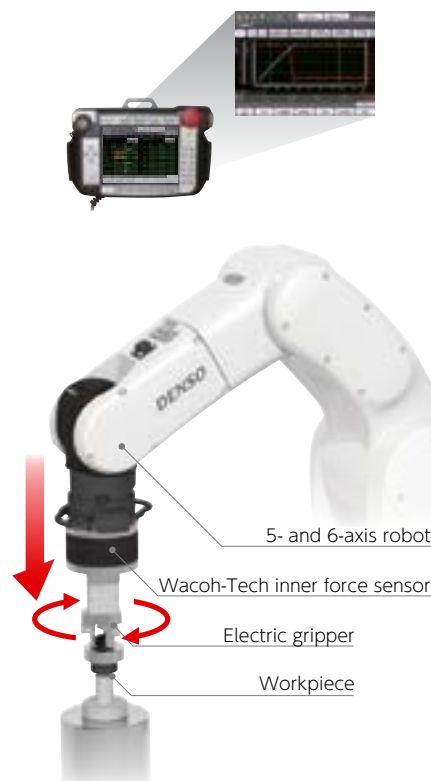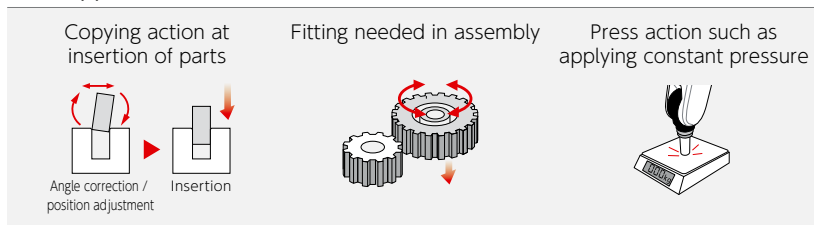

### Models that support Wacoh-Tech inner force sensor

WEF-6A200-4-RCD	RS422 type	Load rating: 200 N
WEF-6A200-4-RCD-B	RS422 type	Load rating: 200 N
WEF-6A200-20-RCD-B	RS422 type	Load rating: 200 N
WEF-6A500-10-RCD-B	RS422 type	Load rating: 500 N
WEF-6A1000-30-RCD-B	RS422 type	Load rating: 1000 N

### Supported Robots

All models of RC8A-compatible DENSO 6-axis robots.  
All models of DENSO 4-axis robots.  
COBOTTA PRO of CRC9-compatible  
\*Internal wiring can be used with VS050, 060, 068, and 087 models with communication interface flange-A.

## High-precision calibration (Hi-Cal) Option available at additional cost

Improved absolute precision and reduced variation in robot machine enables significant reduction of the worktime in teaching.

### Benefits

Absolute accuracy, one of the three types of robot accuracy, has been improved to yield the following benefits:

#### ■ The worktime in re-teaching when robots are exchanged is reduced.

Replacing one robot for which high-precision calibration has been performed with another reduces disparities between teaching points and shortens adjustment times after replacement.

#### ■ Increased vision correction accuracy



Improved vision and correction accuracy of 2D/3D vision picking that is subject to rotation and posture change make it possible to grip workpieces more precisely.

#### ■ Increased accuracy for tool offsets

This improvement shows its worth in tasks like the alignment or assembly of minuscule workpieces that require accuracy.

### Supported Robots

VS-050 / 060 / 068 / 087 standard type



## Mirror control Option available at additional cost



This remote control function operates a remotely located manipulator (slave) using instructions from a control device (master).

Supported robots: All models of RC9/RC8A-compatible (slave)  
DENSO 5- and 6-axis robots

### Safe, intuitive control and teaching system


Using a COBOTTA collaborative robot as a master device, you can intuitively control a large robot by operating the COBOTTA's arm. You can also use the robot's virtual fence function to specify the slave robot's movable range to ensure safety.

- Realize intuitive robot teaching and control, even if you're not familiar with programming.
- The ability to control the robot from outside a clean environment such as a pharmaceutical manufacturing process lets you keep out foreign materials and prevent worker contamination. \*1

Use of this capability requires a master/slave expansion function license.

\*1: For safety reasons, use is limited to a maximum cable length of 20 m and the area within which the slave robot is visible.

### System configuration diagram

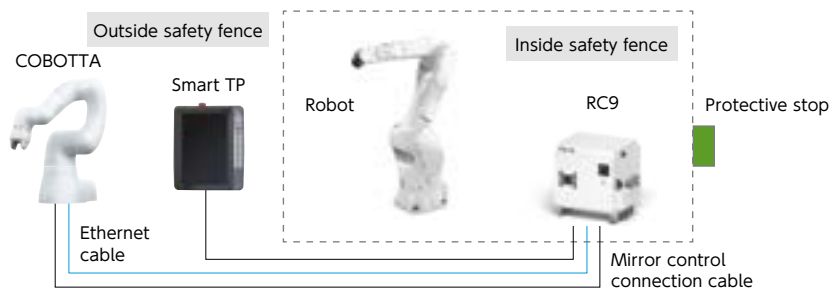

### Master robot




### COBOTTA

Item	Specifications
Arm length (No. 1 arm + No. 2 arm)	342.5 (165 + 177.5) mm
Rated payload (Maximum payload)	0.5 kg (0.7 kg within $\pm 10^\circ$ with the wrist angled downward)
Position repeatability	$\pm 0.05$ mm
Protection grade	COBOTTA unit: IP30 AC adapter, AC cable: IP20

## Dual arm control Option available at additional cost


Enables control of two robots from a single controller. This feature reduces adjustment labor hours, installation space requirements, and initial costs while achieving increased speed.

### System configuration diagram

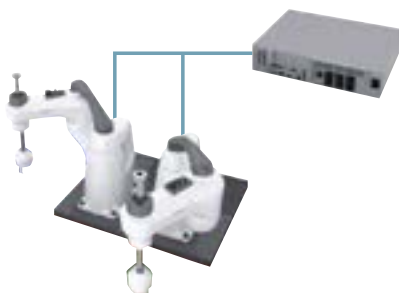

### Supported Robots



HSR, HS-A1

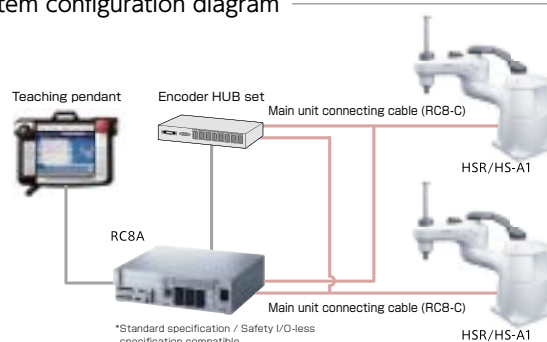

## Cooperative control Option available at additional cost

The cooperative control function implements synchronized operation of multiple robots, allowing the transport or assembly of large or heavy objects that would be difficult to accomplish with a single robot. The ability to create and execute programs for multiple robots using a single controller simplifies programming and configuration.

System configuration diagram

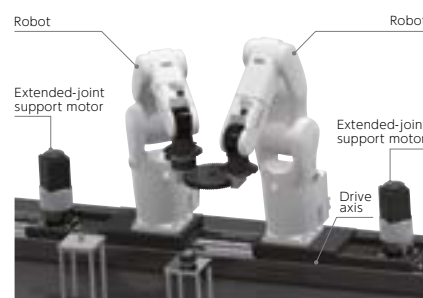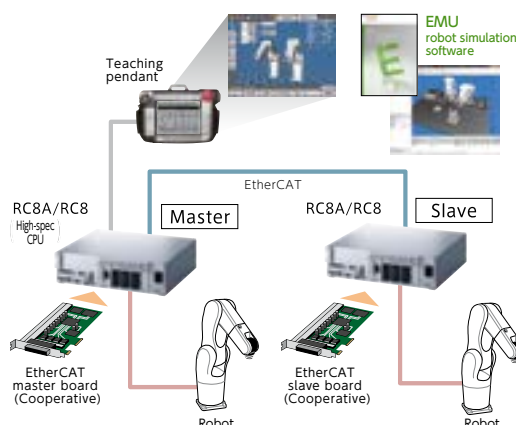

### Main applications

Transport and assembly of large or heavy objects.

### Supported robots



All models of RC8A-compatible DENSO 6-axis robots.  
All models of DENSO 4-axis robots.

## Exclusive control Option available at additional cost

Entry of multiple robots into excluded areas can be controlled.

This function restricts entry into the work area to one robot when a work area is being shared by multiple robots. Entry into exclusive areas is prohibited by decelerating or stopping other robots that attempt to enter.

System configuration diagram

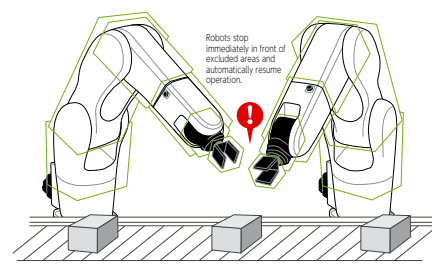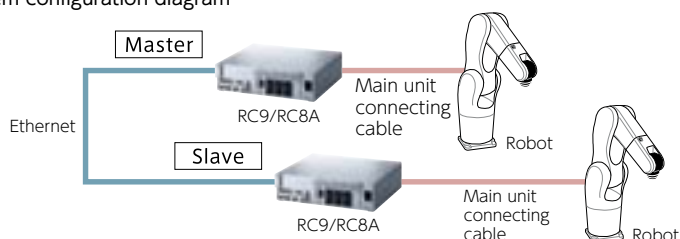

\*A maximum number of exclusion controllable robots is 4.

### Supported Robots



All robot models compatible with CRC9 or RC9 or RC8A

## Virtual fence Option available at additional cost

Eliminates interference between robots and peripherals.

This function models robots, tools, and other equipment and prevents collisions between monitored models.

System configuration diagram

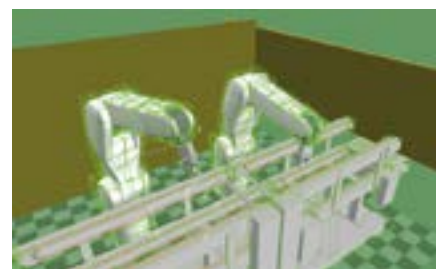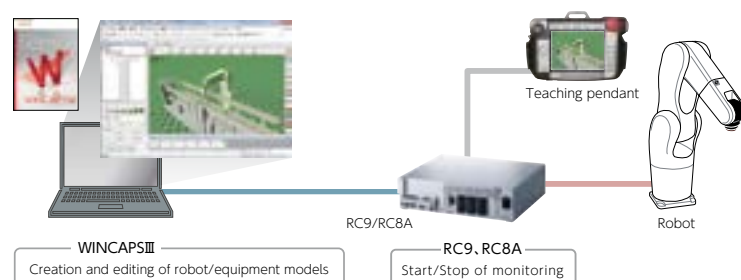

\*Applicable to multiple robots (2 max.) only when they are cooperated.

### Supported Robots

All robot models compatible with CRC9 or RC9 or RC8A

## Conveyor tracking Option available at additional cost

Robot tracks the workpiece to Pick & Place without stopping the conveyor. Use a wizard-type GUI to easily adjust complex conveyor tracking. In addition, free curve interpolation control is also possible during conveyor tracking.



### Sensor tracking

This function registers the position of workpieces crossing in front of a photoelectric sensor in advance, calculates where each workpiece will move, and controls the robot so as to track it.

### Vision tracking

This function registers the position and orientation of workpieces detected by a vision sensor using image recognition, calculates where each workpiece will move, and controls the robot so as to track it.

### System configuration diagram

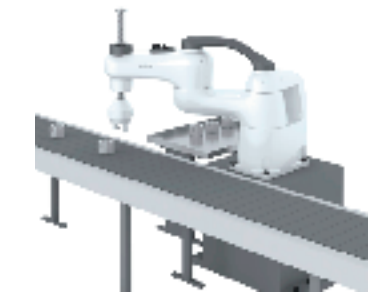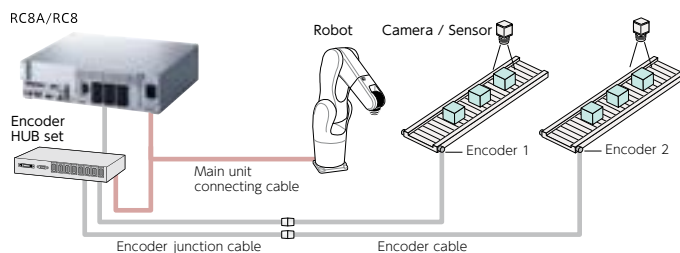

Easy, wizard-style setup



### Main applications

Picking and packaging trays of food products / medical and pharmaceutical product workpieces


### Supported Robots

All robot models compatible with RC8A

## Circular tracking Option available at additional cost

The conveyor tracking is compatible with circular conveyors. Robot tracking of workpieces moving in a circular orbit can be set using a wizard-type GUI similar to the conventional linear conveyor tracking.

### System configuration diagram

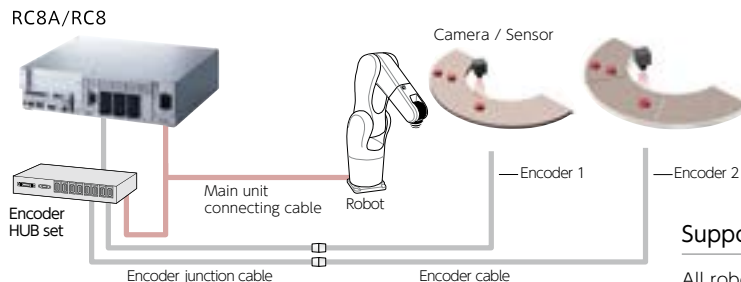

### Supported Robots


All robot models compatible with RC8A

## Extended-joint tracking Option available at additional cost

The conveyor and robot operations are controlled concurrently, allowing accurate tracking even in the event of sudden acceleration or deceleration. This is especially useful and convenient in processes involving arranging and transporting workpieces before or after feeding to packaging equipment—processes commonly encountered in the manufacture of food, pharmaceuticals, and cosmetics products.



### System configuration diagram

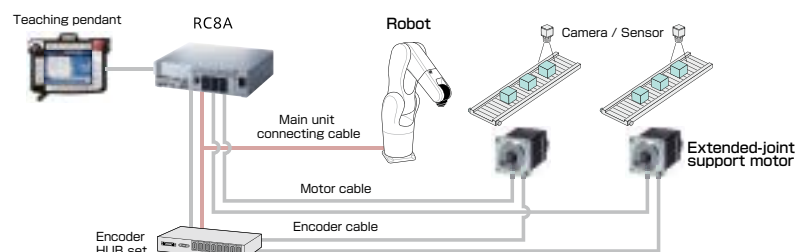

### Supported Robots


All robot models compatible with RC8A

## Extended-joint support control Option available at additional cost

Extended-joint support can be controlled with the same interface as the robot.

Easy adjustment is made possible by auto gain tuning.

System configuration diagram

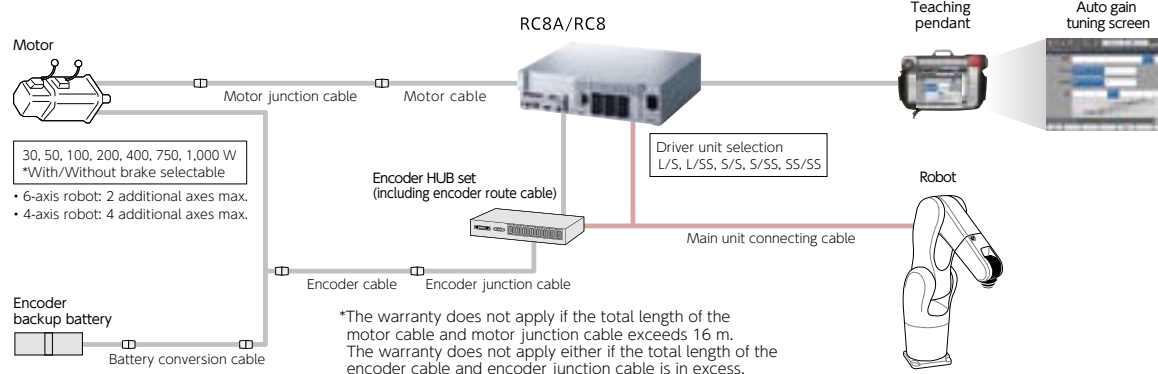

Main applications

Robot drive axis / servo hand, device to determine position

System configuration diagram

This function makes it possible to control a robot's peripheral devices, for example a drive axis, servo hand, or tray changer, as an extended-joint support using the same interface as the robot.

Supported Robots

All robot models compatible with RC9 or RC8A

## EtherCAT Slave motion Option available at additional cost


Via EtherCAT, this integrated development environment using the TwinCAT3 PC-base integration software enables centralized control of a robot and other devices based on a generated track from an IPC equipped with EtherCAT Master.

System configuration diagram



Supported Robots


All robot models compatible with RC8A

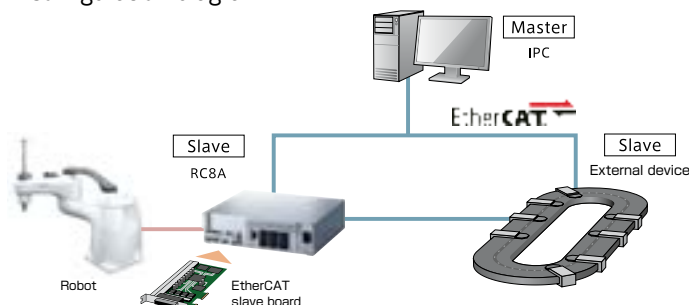

## External axis control Option available at additional cost

Servo motors of any capacity can be controlled by expanding the EtherCAT master board (external axis).

System configuration diagram

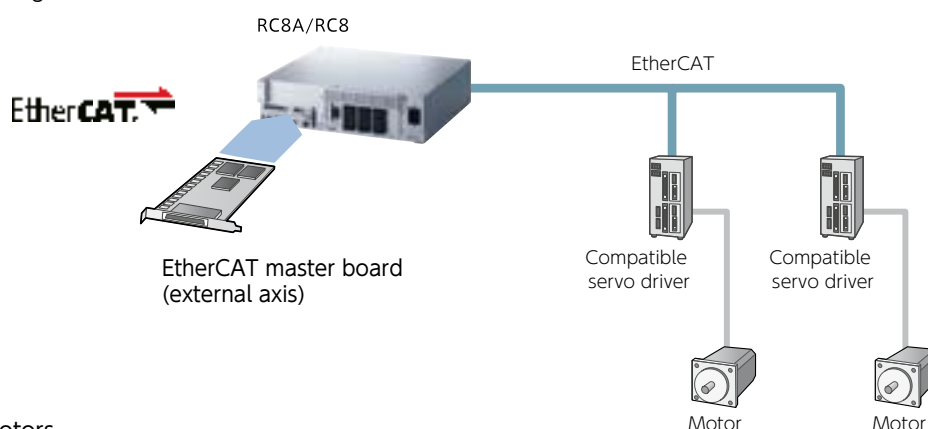

Supported servomotors


Sanyo Denki Co., Ltd.: SANMOTION R ADVANCED MODEL EtherCAT (H-type only)  
HIWIN CORPORATION: D1-N / D2T AC servo motors & Linear motors

Delta Electronics, Inc.: ASDA-A2-E  
Panasonic Corporation: MINAS A5B/A6B

## External TCP Option available at additional cost

Rotation around a defined center point of the workpiece allows for an easier method of teaching based on target objects. The external TCP function reduces the number of teaching points when performing CP operation (linear or arc) while the robot is holding a workpiece, for example when you wish to remove burrs from the workpiece using a drill that's mounted on the device or when you wish to apply a sealant coating to a workpiece using a mounted sealant gun.

### ■ Deburring rectangular workpieces via stationary deburring tool

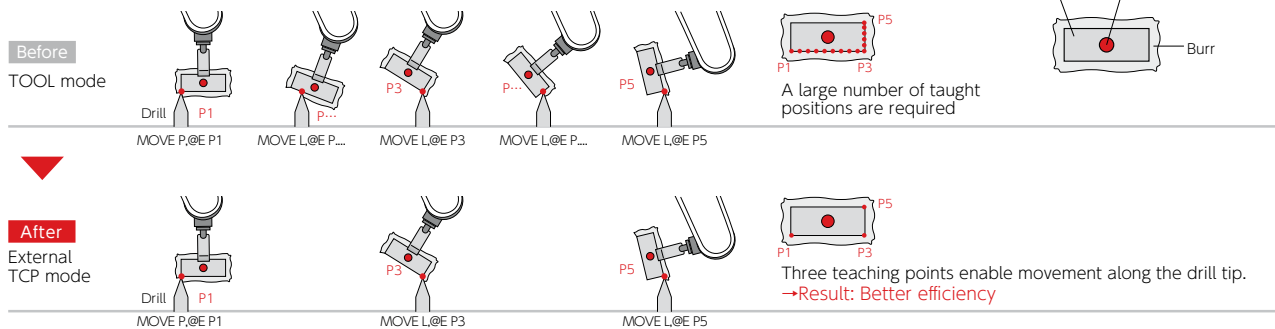

### Main applications

Deburring and sealant coating



### Supported Robots

All robot models compatible with CRC9 or RC9 or RC8A

## Command slave Option included

Robots can be controlled from PLC languages (ladder programs). Function block (FB) supports 130 types of robot commands.

### System configuration diagram

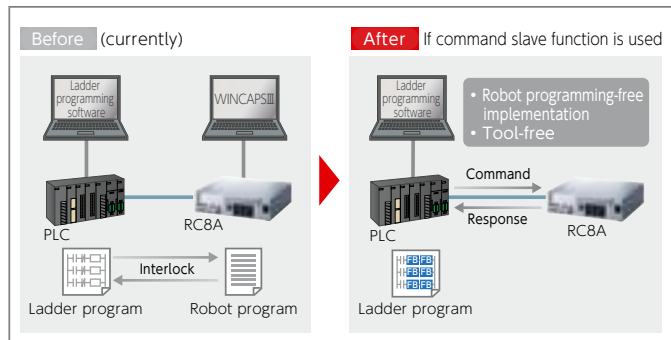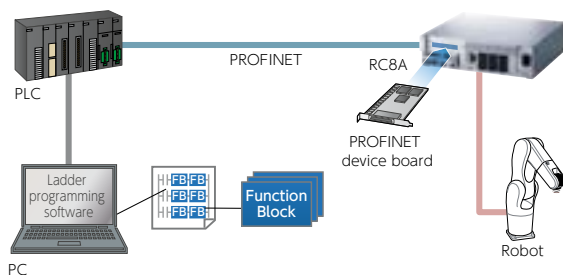

### Main applications

Robot control from PLC

### Supported PLCs


SIEMENS: SIMATIC S7-1500  
Rockwell Automation: Model Compatible with STUDIO 5000 Logix Designer Version 30  
CODESYS V3

### Supported Robots

All robot models compatible with RC8A

## Supports CONTEC expansion boards Option included\*

Approximately 200 CONTEC expansion boards are supported.

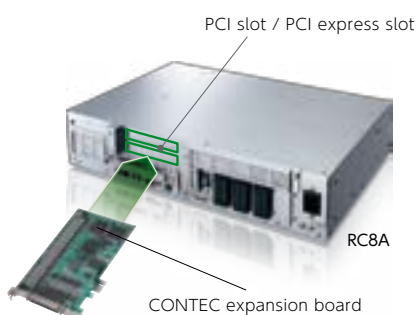

### Supported Boards

- Analog I/O board
- Analog input board
- Analog output board
- Motion control board\*
- Digital input board
- Digital output board
- Serial communications board (RS232C / 422 / 485)

\*Additional costs apply to the motion control board expansion option only.

### Supported Robots

All robot models compatible with RC8A


## Compliance control function

Control the force to protect the workpiece and hand from excessive loads.

This function can be used to control force returning to the motor on each axis to absorb misalignment. It's effective when used in work that involves contact with the target object, for example when mating or fitting together parts.

### Main applications

Product assembly

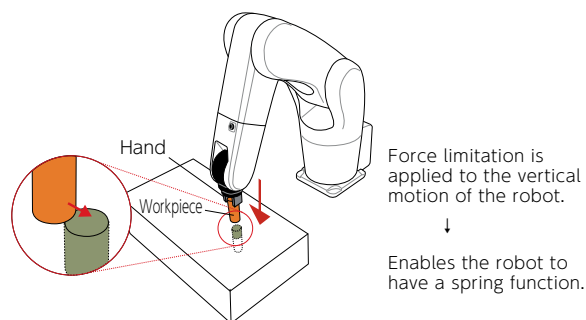


### Supported Robots

VP series  
VS series: 050 / 060 / 068 / 087 / 6556 / 6577  
VM series

\*When precision is the required force control, please use compliance control function with force sensor (an option available at additional cost).

## b-CAP (communications protocol)

Send motion command packets from PC, PLC and other devices to directly control a robot.

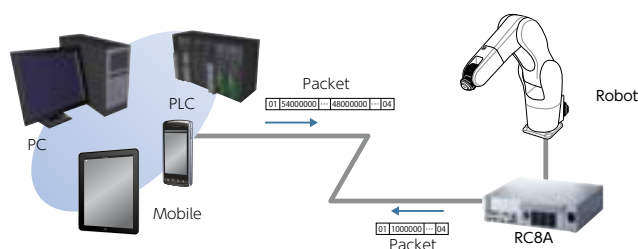

### Supported Robots


VP series  
VS series: 050 / 060 / 068 / 087 / 6556 / 6577  
VM series, HSR® series, HS-A1 series, HM series, XR series  
VMB series, VLA series, COBOTTA PRO series

### b-CAP slave

### Option included

### RC8A

Possible to send PC-generated trajectory data to the controller to control robots in real time.

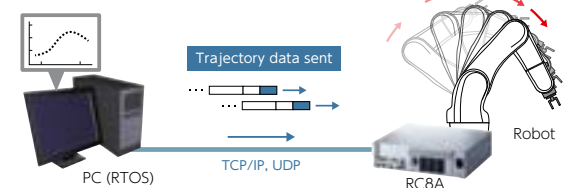


\*Use of the EtherCAT slave board (Motion) enables EtherCAT communication.

## Optimal speed setting

Motion speed and acceleration is optimized to correspond to the payload on the robot end to reduce cycle time.

The weight and location of the center of gravity of tools and workpieces attached to the end of a robot arm cause the optimal speed and acceleration to vary. Optimized speed control allows the user to set the weight, location of the center of gravity, and mode for tools and workpieces based on the robot's end load and posture.



### Supported Robots

VP series  
VS series: 050 / 060 / 068 / 087 / 6556 / 6577  
VM series, HSR® series, HS-A1 series, HM series, XR series  
VMB series, VLA series, COBOTTA PRO series

## Control panel function

The teaching pendant screen can be customized as a control panel of robot and peripheral devices.




### Supported Robots

VP series  
VS series: 050 / 060 / 068 / 087 / 6556 / 6577  
VM series, HSR® series, HS-A1 series, HM series, XR series  
VMB series, VLA series, COBOTTA PRO series

## Provider

Provider refers to the device interface used to directly control a variety of Factory Automation products (image processing equipment, sensors or hands) from PacScript (DENSO Robotics language).


Basic configuration

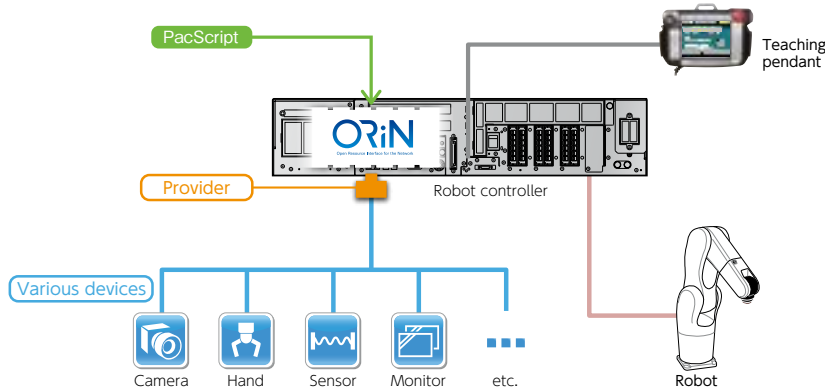

## Supported product list

Category	Manufacturer	Product / Series
Robot	Yamaha Motor Co., Ltd.	SR1 / DRCX / RCX
	IAI Corporation	P-CON / E-CON / SEL
Image processing equipment	OMRON Corporation	FZ3 / FZ4 / FZM1 / FZ5 / FH / FQ-M / FQ2
	Keyence Corporation	XG / XGX/ CV / CVX
	Panasonic Industrial Devices SUNX Co., Ltd.	PV series
	Cognex Corporation	In-Sight series
	Sharp Manufacturing Systems Corporation	IV series
	Canon Inc.	VB-H43B / VB-M42B
	Matrox	Matrox Design Assistant
	Leimac Ltd.	IPPA series
	BAUMER	VeriSens Smart Camera
	SICK	PLOC2D series
Non-contact IC card reader/writers	DENSO Corporation	PR-450, PR-550, QK12-IC
QR Code scanners	DENSO Corporation	Active USB-COM port driver compatible models
RFID reader/writers	DENSO Corporation	SE1-HU-P
Parts feeders	flexfactory	anyfeed series
	Asyrl	Asycube series / EYE+
Servo hands	KOGANEI Corporation	EWHA series
Network modules	Balluff	BNI EIP-507-005-Z040
		EtherNet/IP IO-Link masters BNI004A, BNI009T, BNI006A, BNI007N, BNI00AA
Sensors	Wacoh-Tech Inc.	DynPick series
	ATI	F/T models
	SINTOKOGIO	ZYXer series
Displacement sensors	KEYENCE	LJ-V7000, LK-G3000, LK-G3000P, LK-G3000V, and LK-G3000PV
Laser markers	KEYENCE	MD-X1000, 1500, MD-F3200, 5200, MD-U1000, and ML-Z9600
Modbus RTU/ASCII/TCP	—	—
Printers	EPSON	Models that support ESC/POS commands
Lightweight modules	MettlerToledo	WMF204C-W/IE
Torque sensors	Daiichiseiko Co., Ltd.	ESTORQ / ES-Gripper
LED lighting	CCS Inc.	PD3 series
	Optex FA Co., Ltd.	OPPD 30E

# Global Network

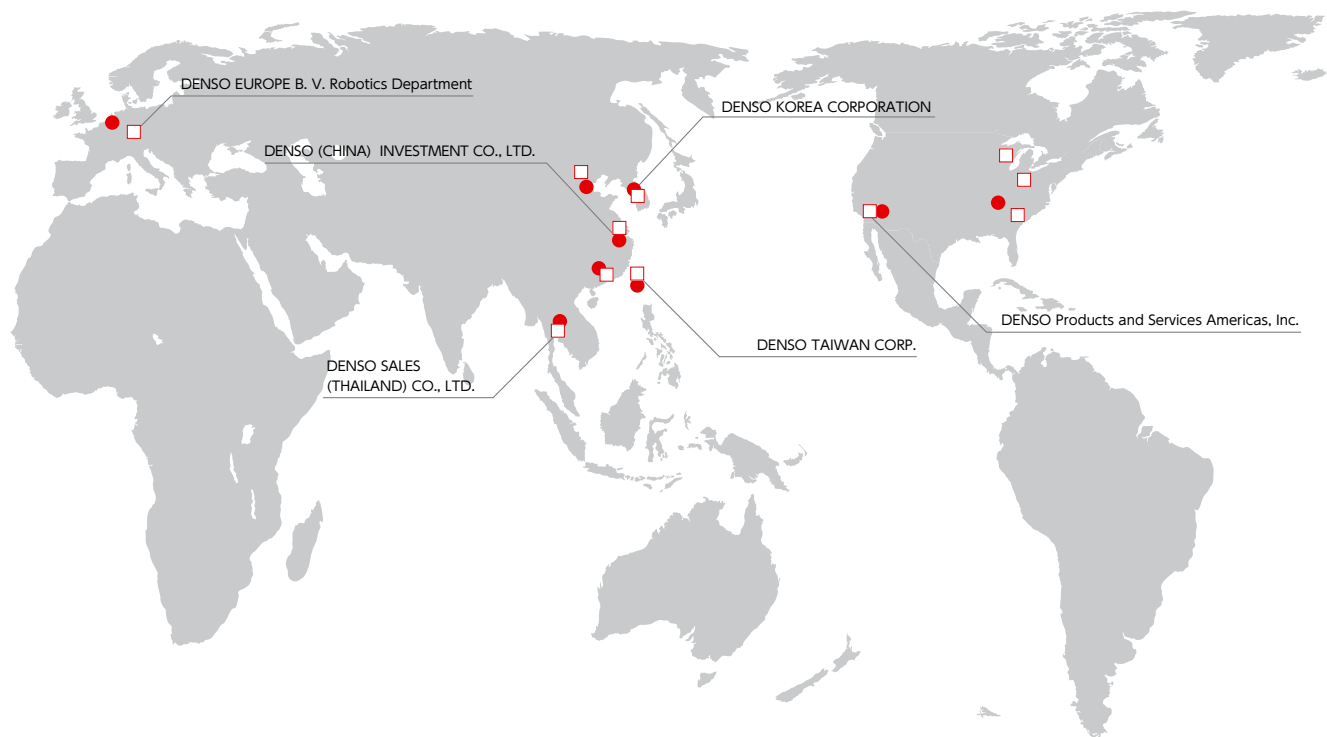

## Overseas centers

□ : Sales offices    ● : Service centers

DENSO Products and Services Americas, Inc.	3900 Via Oro Avenue, Long Beach, California, 90810, U.S.A.	TEL: +1-888-476-2689	FAX: +1-310-952-7502
DENSO EUROPE B. V. Robotics Department	Waldeckerstrasse 9 D-64546 Moerfelden-Walldorf, Germany	TEL: +49-6105-27-35-150	FAX: +49-6105-27-35-180
DENSO KOREA CORPORATION	131, Seonggogae-ro, Uiwang-si, Gyeonggi-do, Korea 437-120	TEL: +82-31-340-1751	FAX: +82-31-8033-7215
DENSO (CHINA) INVESTMENT CO., LTD.	No.35 Yuandian Road, Minhang District, Shanghai, CHINA 201108	TEL: +86-21-2350-0093	FAX: +86-21-2350-0179
DENSO TAIWAN CORP.	No.525, Sec2, Mei Su Rd., Jui Ping Li, Yang Mei Town, Taoyuan Hsien, Taiwan	TEL: +886-3-482-8001	FAX: +886-3-482-8003
DENSO SALES (THAILAND) CO., LTD.	888 Moo 1 Bangna - Trad Rd., KM. 27. 5, T. Bangbo, A. Bangbo, Samutprakarn 10560, Thailand	TEL: +66-2-315-9500	FAX: +66-2-315-9556



[YouTube] [https://www.youtube.com/c/DENSOWAVE\\_inc](https://www.youtube.com/c/DENSOWAVE_inc)



[Facebook] <https://www.facebook.com/DENSOWAVEofficial>

### To ensure safe usage of products

- Please read the instruction manual thoroughly and use products following proper procedures.
- For ease of clarity and understanding, safety equipment and devices stipulated by law, such as safety fences, are not shown in photographs and illustrations in this catalog.

### DENSO WAVE INCORPORATED



- DENSO Robot, DENSO Robotics, COBOTTA, HSR, and WINCAPS are registered trademarks of DENSO WAVE INCORPORATED.
- ORiN is a registered trademark of the Japan Robot Association.
- The data in this catalog is current as of March 2024 and is subject to change without notice.



The robots and controllers in this catalog comply with the RoHS Directive. For details, see our website.



Handling of environmentally hazardous substances



Robotics products RoHS compliance list

For purchases and consultation:

***DENSO***

